
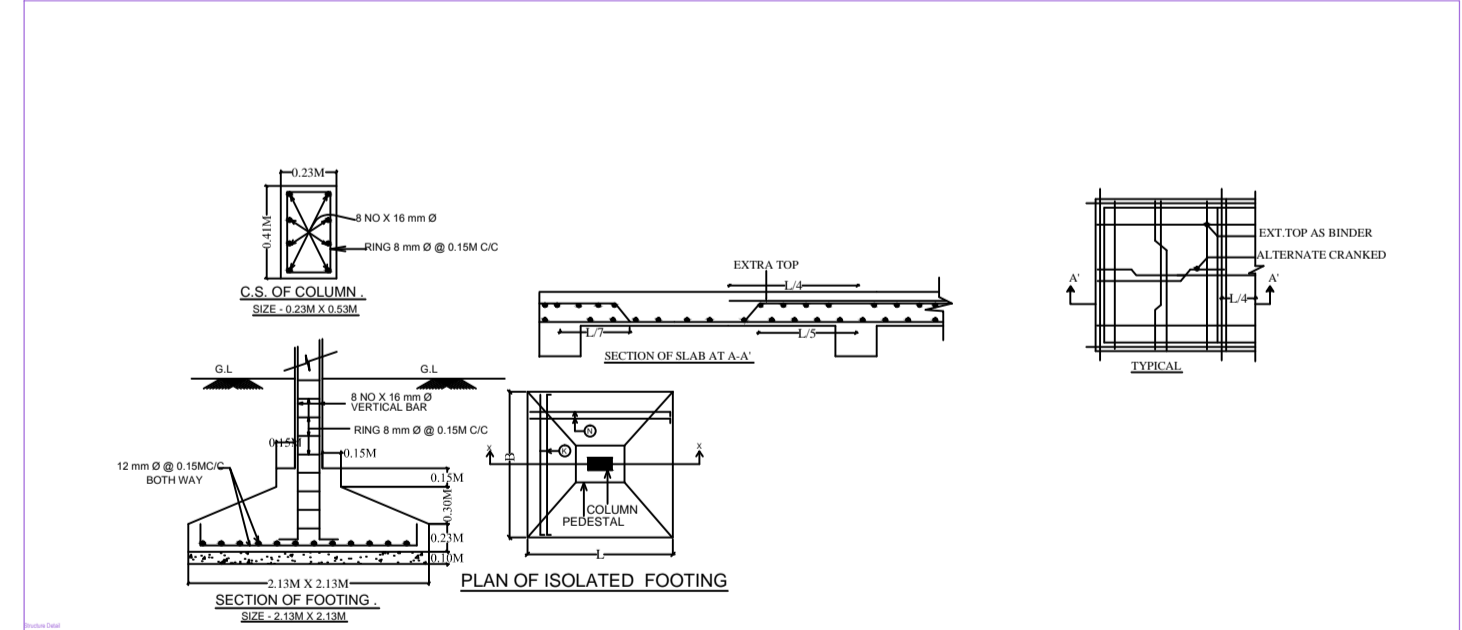
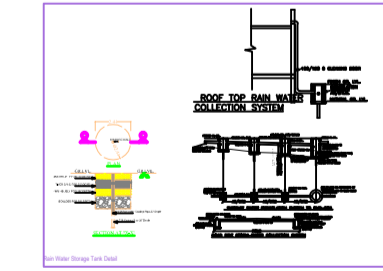
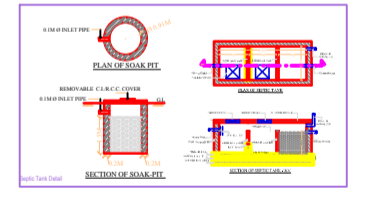
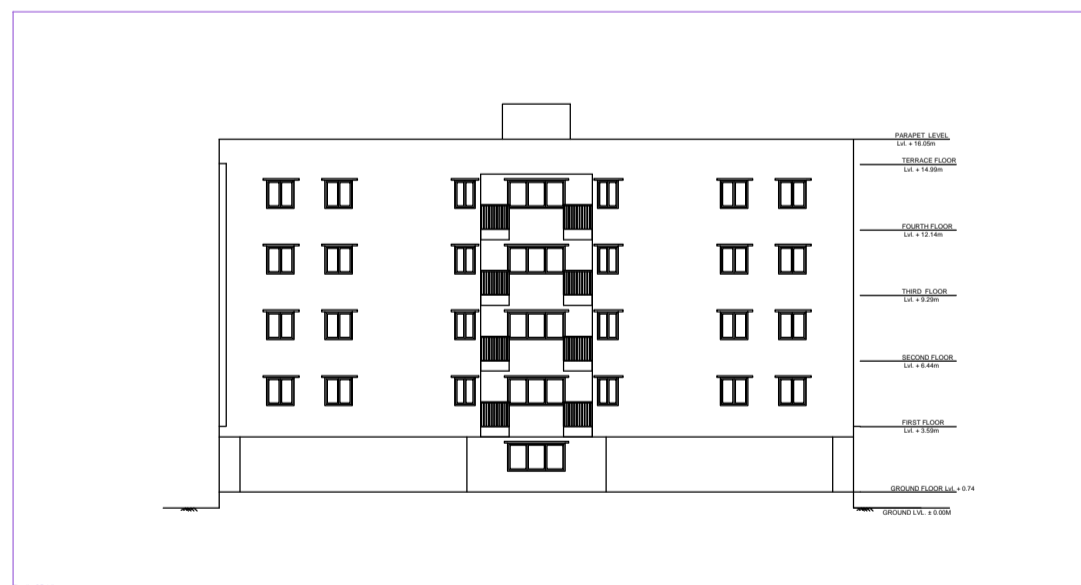
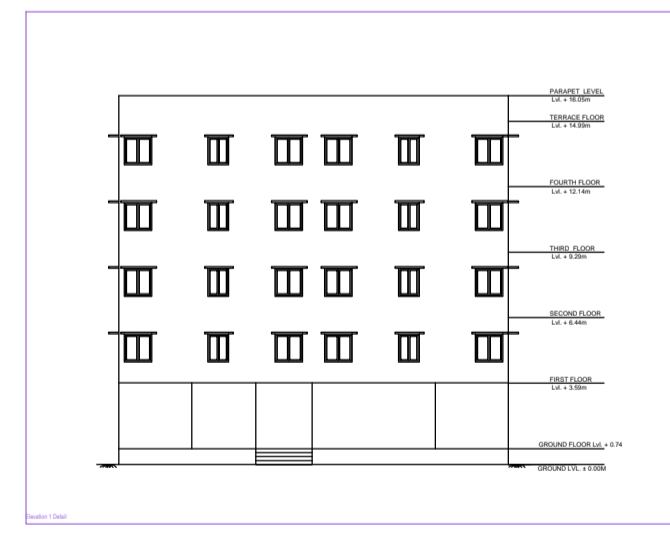
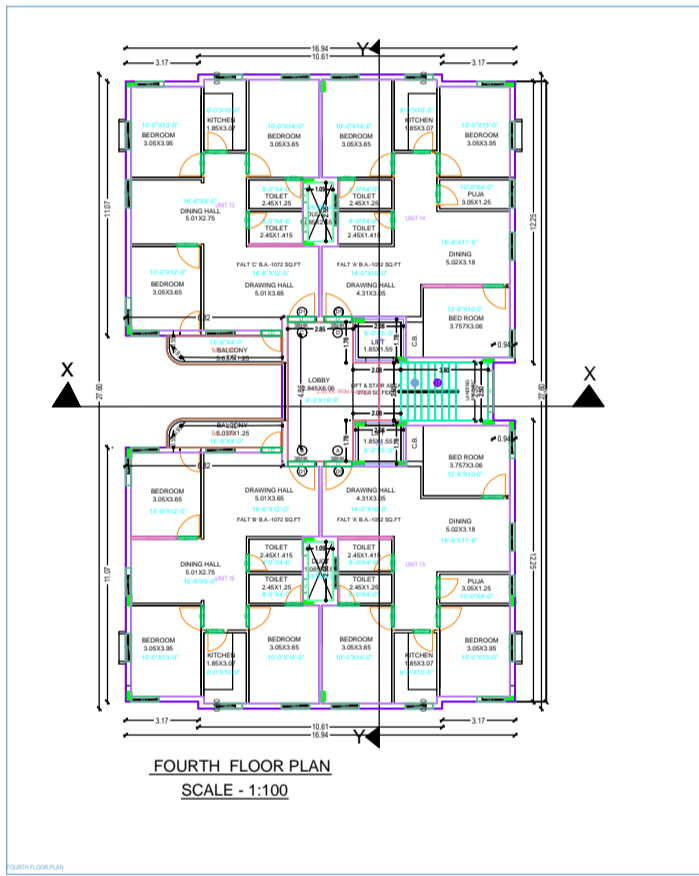
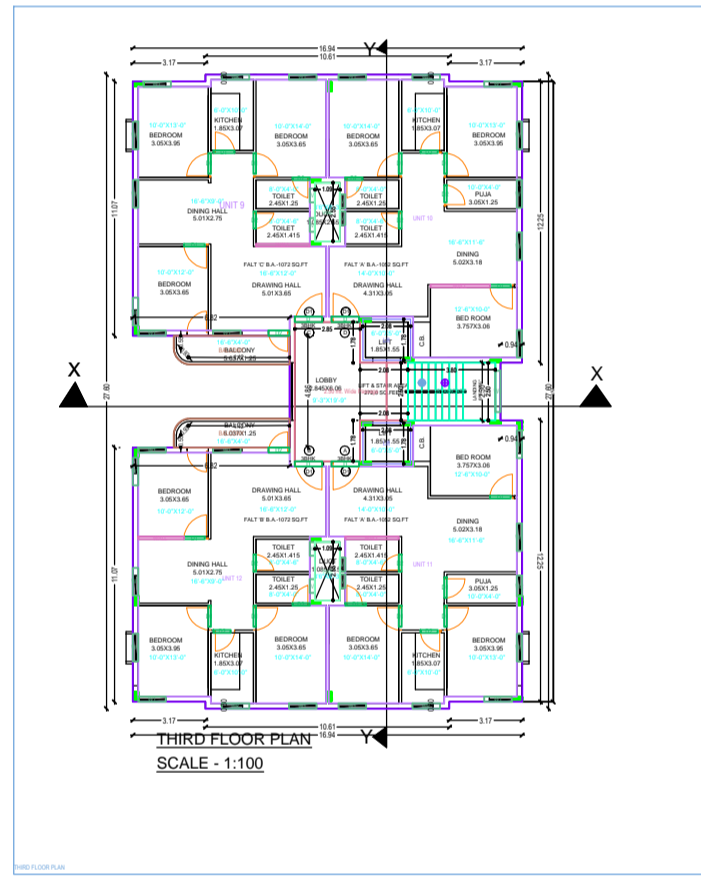


AREA STATEMENT OF PROPOSED BUILDING(BLOCK-A)
FORM - C

No. of floors	Area in sq. m.	Area in sq. m. (including area covered by area of plot)	Total covered area	Floor Area										Total Floor Area	F.A.R.	Density of Use Proposed			
				1	2	3	4	5	6	7	8	9	10				11	12	13
ADJUTMENT	554.956	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	60.96	PARKING
GROUND FLOOR	420.845	-	420.845	5.72	21.36	-	-	-	-	-	-	-	-	-	-	-	-	27.07	COMMERCIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
TOTAL	2087.39	24.72	2136.98	22.88	32.08	-	-	-	-	-	-	-	-	-	-	-	-	44.96	2147.57

Total Plot Area 852.34 Sq. M.
% of Ground Coverage = $\frac{420.84}{852.34} \times 100 = 52.45\%$ OF PLOT AREA
F.A.R. = $\frac{2147.57}{852.34} = 2.67$

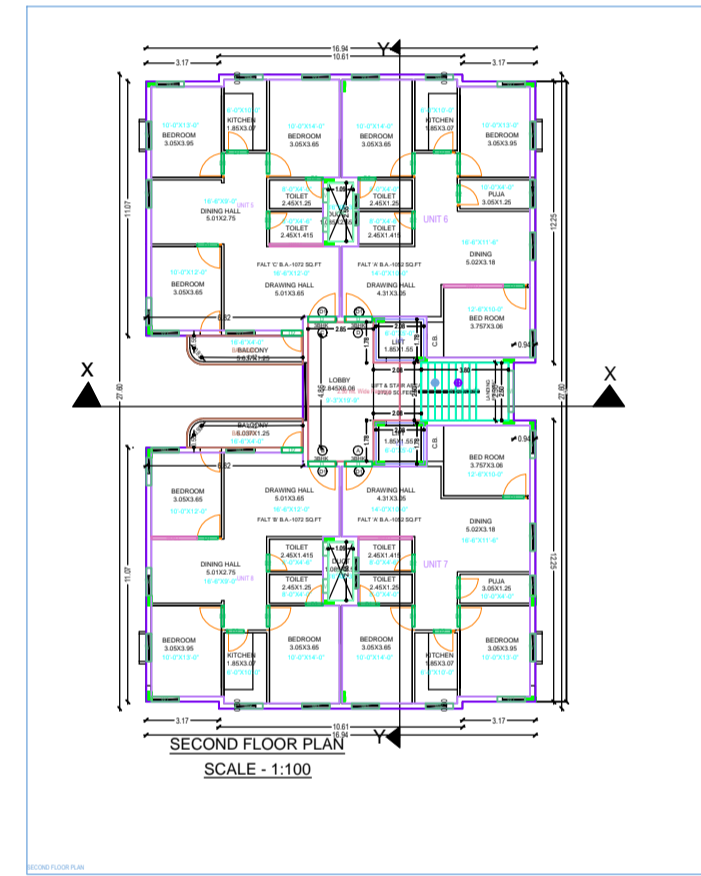

GENERAL SPECIFICATION -		SCHEDULE OF OPENINGS	
FOUNDATION	PLAIN CEMENT CONCRETE AS PER DESIGN. R.C.C. COLUMN FOOTING & COLUMN AS PER STRUCTURAL DESIGN.	S.NO.	DESCRIPTION
SUPER STRUCTURE	R.C.C. COLUMN AND BEAM AS PER STRUCTURAL DESIGN. GLAZING, EXTERNAL WALL & UP TO THE PARTITION WALL. R.C.C. ROOF SLAB AS PER STRUCTURAL DESIGN.	1	1.07 M X 2.11 M Panelled single shutter door.
MECHANICAL	MECHANICAL SERVICES AS PER DESIGN. CEMENT PLASTER, P.O.P. & O.D. HYDRIC CONDUIT LAYERS WITH G.I. PIPE FOR WATER SUPPLY. P.V.C. PIPE FOR DRAINAGE.	2	0.91 M X 2.11 M Panelled single shutter door.
INTERNAL FINISH	CEMENT PLASTER, P.O.P. & O.D. HYDRIC CONDUIT LAYERS WITH G.I. PIPE FOR WATER SUPPLY. P.V.C. PIPE FOR DRAINAGE.	3	0.76 M X 2.11 M Panelled single shutter door.
BANDY		4	1.52 M X 1.22 M Glazed steel framed window 3. shut.
		5	1.22 M X 1.22 M Glazed steel framed window 3. shut.
		6	1.22 M X 1.07 M Glazed steel framed window 2. shut.