

**AREA STATEMENT OF PROPOSED BUILDING(BLOCK-A)**









**FORM - C**

No. of floors	Area in sq. m.	Area in sq. m. (approximate)	Total covered Area	Floor Area										Total Floor Area	F.A.R.	Density of Use Proposed			
				1	2	3	4	5	6	7	8	9	10				11	12	13
ADJUTMENT	554.956	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	60.96	PARKING
GROUND FLOOR	420.845	-	420.845	5.72	21.36	-	-	-	-	-	-	-	-	-	-	-	-	27.07	COMMERCIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
FLOOR	428.27	6.18	434.45	5.72	5.92	-	-	-	-	-	-	-	-	-	-	-	-	11.24	RESIDENTIAL
TOTAL	2087.39	24.72	2136.98	22.88	32.08	-	-	-	-	-	-	-	-	-	-	-	-	44.96	2147.57

Total Plot Area 852.34 Sq. M.

% of Ground Coverage =  $\frac{420.84}{852.34} \times 100 = 52.45\%$  OF PLOT AREA

F.A.R. =  $\frac{2147.57}{852.34} = 2.67$

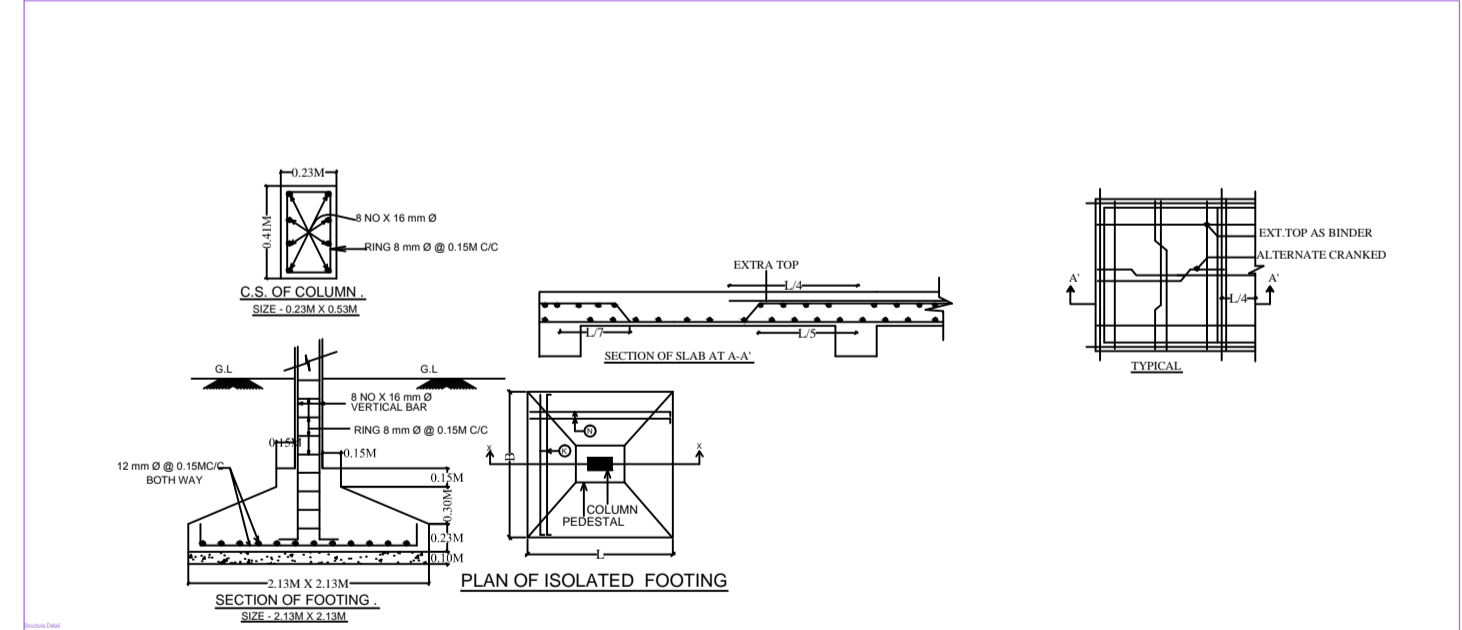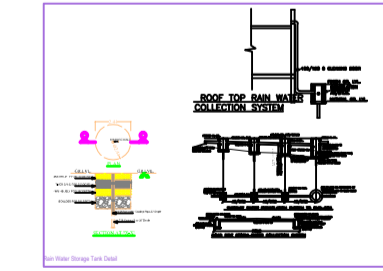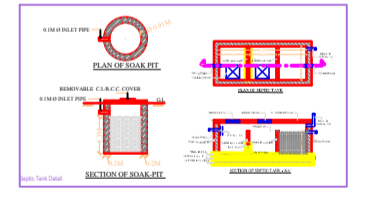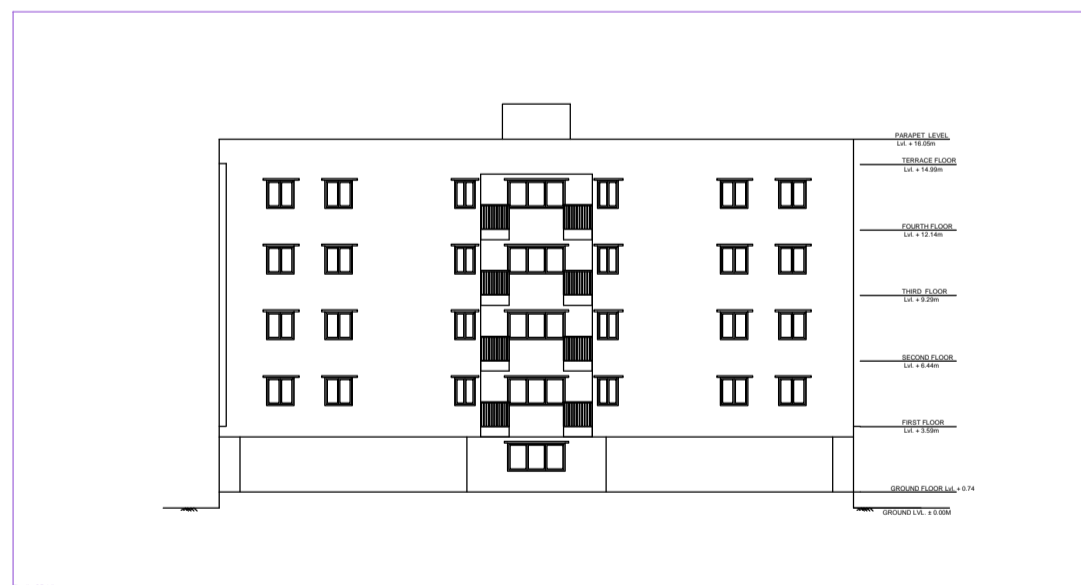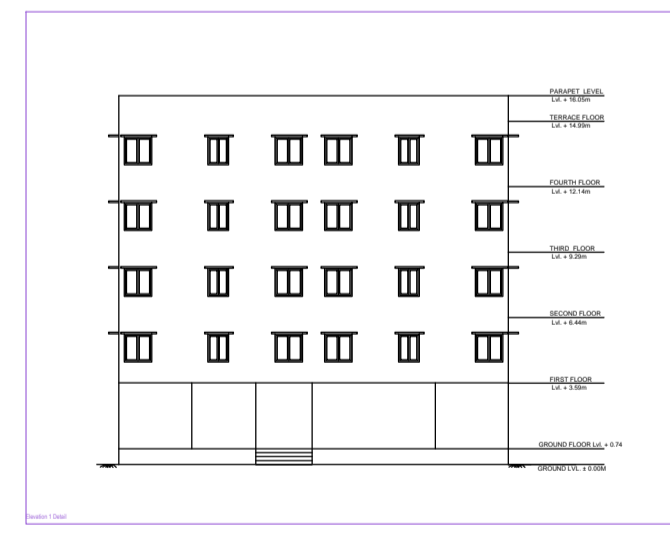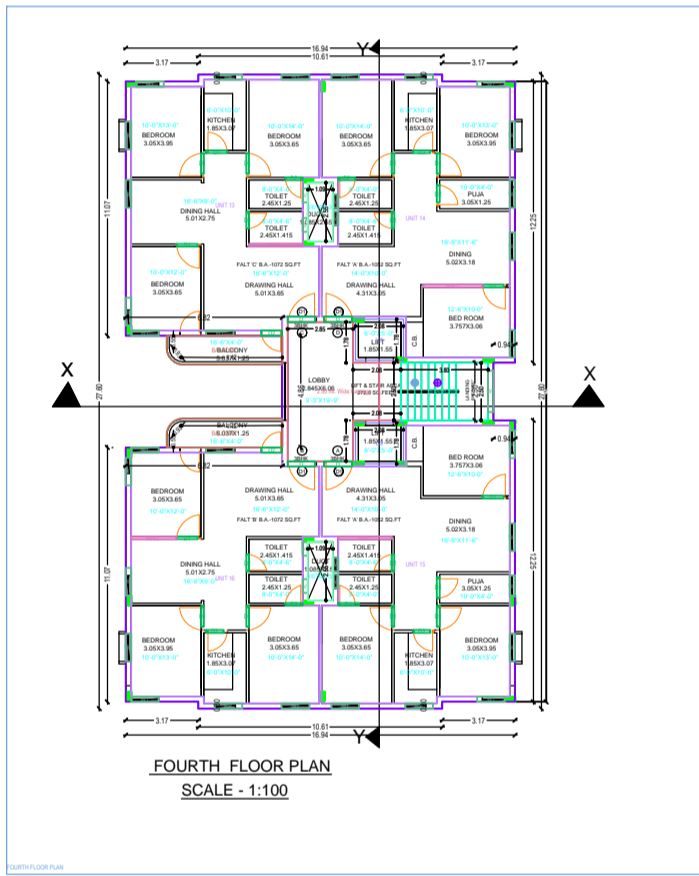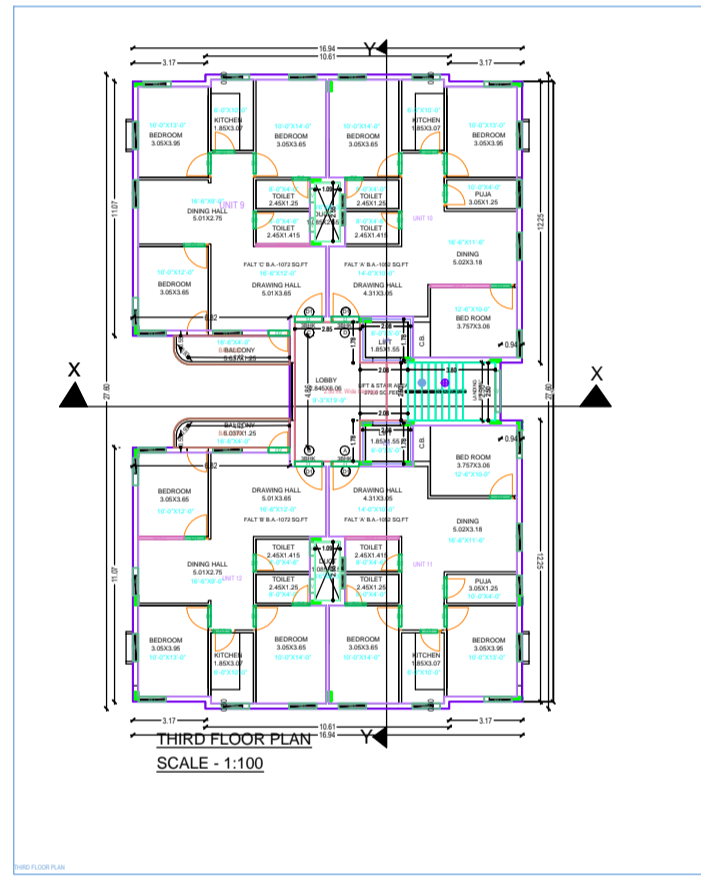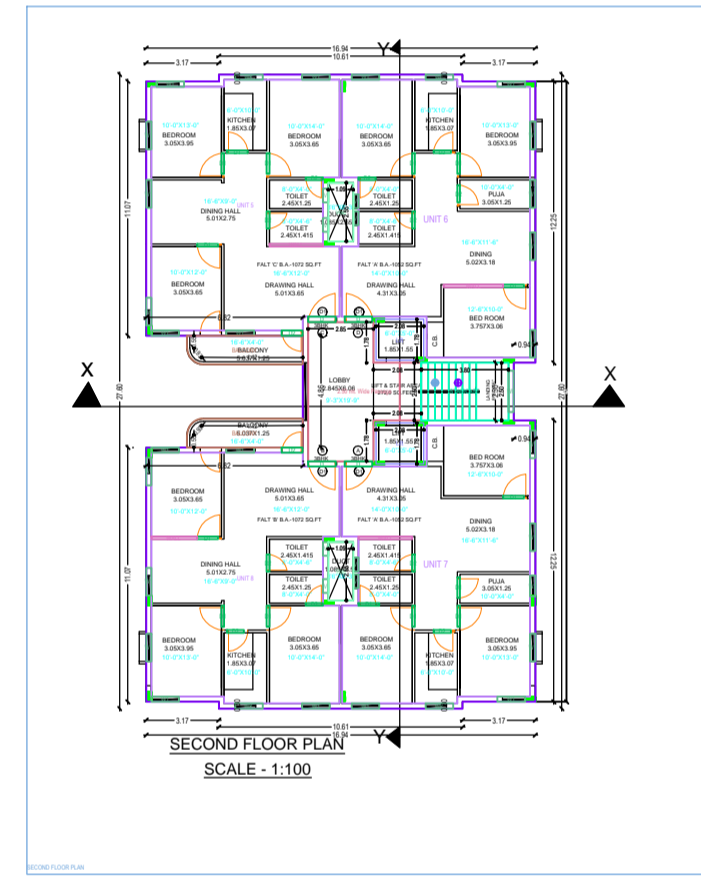

**GENERAL SPECIFICATION -**

FOUNDATION	PLAIN CEMENT CONCRETE AS PER DESIGN.
ROOF	R.C.C. COLUMN FOOTING & COLUMN AS PER STRUCTURAL DESIGN.
ROOF	R.C.C. COLUMN AND BEAM AS PER STRUCTURAL DESIGN.
ROOF	GLAZED STEEL WINDOW & GLASS DOOR AS PER STRUCTURAL DESIGN.
ROOF	R.C.C. ROOF SLAB AS PER STRUCTURAL DESIGN.
ROOF	MEANS FOR PLASTER.
ROOF	CEMENT PLASTER, P.O.P. OR D.
ROOF	HYDRIC CRACK ALABASTY W.M.
ROOF	G.I. PIPE FOR WATER SUPPLY.
ROOF	P.V.C. PIPE FOR DRAINAGE.

**SCHEDULE OF OPENINGS**

S.NO.	MADE	SIZE	DESCRIPTION
1	ED	1.07 M X 2.11 M	Panelled single shutter door.
2	ED	0.91 M X 2.11 M	Panelled single shutter door.
3	ED	0.76 M X 2.11 M	Panelled single shutter door.
4	W	1.52 M X 1.22 M	Glazed steel framed window 3. shut.
5	W	1.22 M X 1.22 M	Glazed steel framed window 3. shut.
6	W	1.22 M X 1.07 M	Glazed steel framed window 2. shut.