



FRONT ELEVATION




SIDE ELEVATION

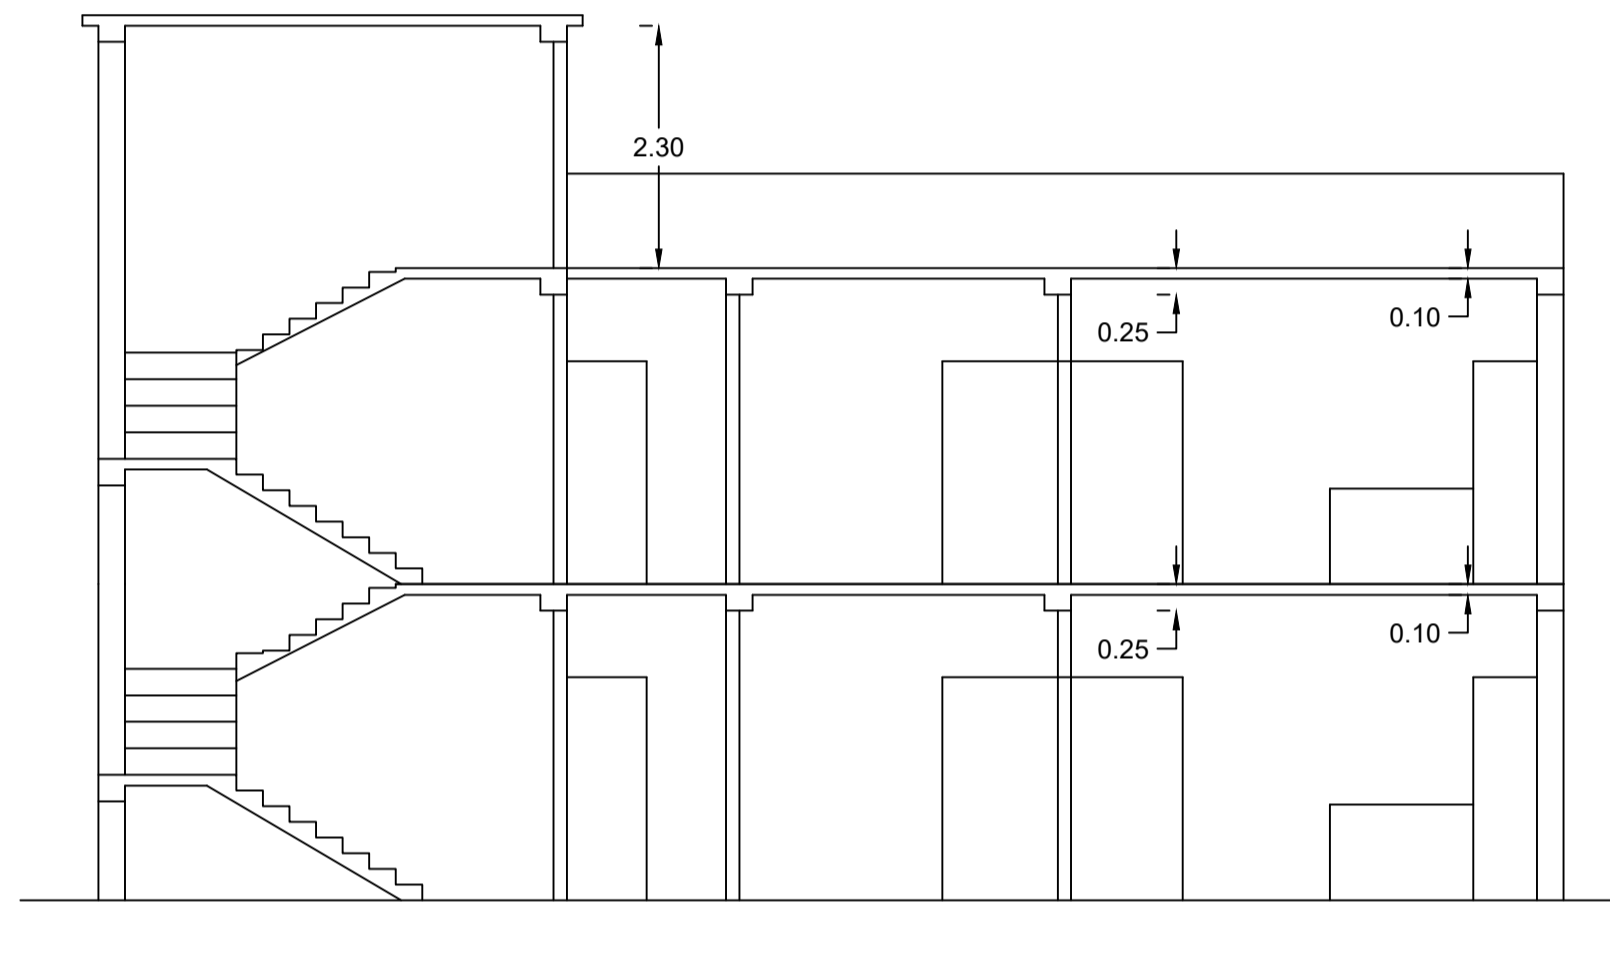

SECTION AT -XX

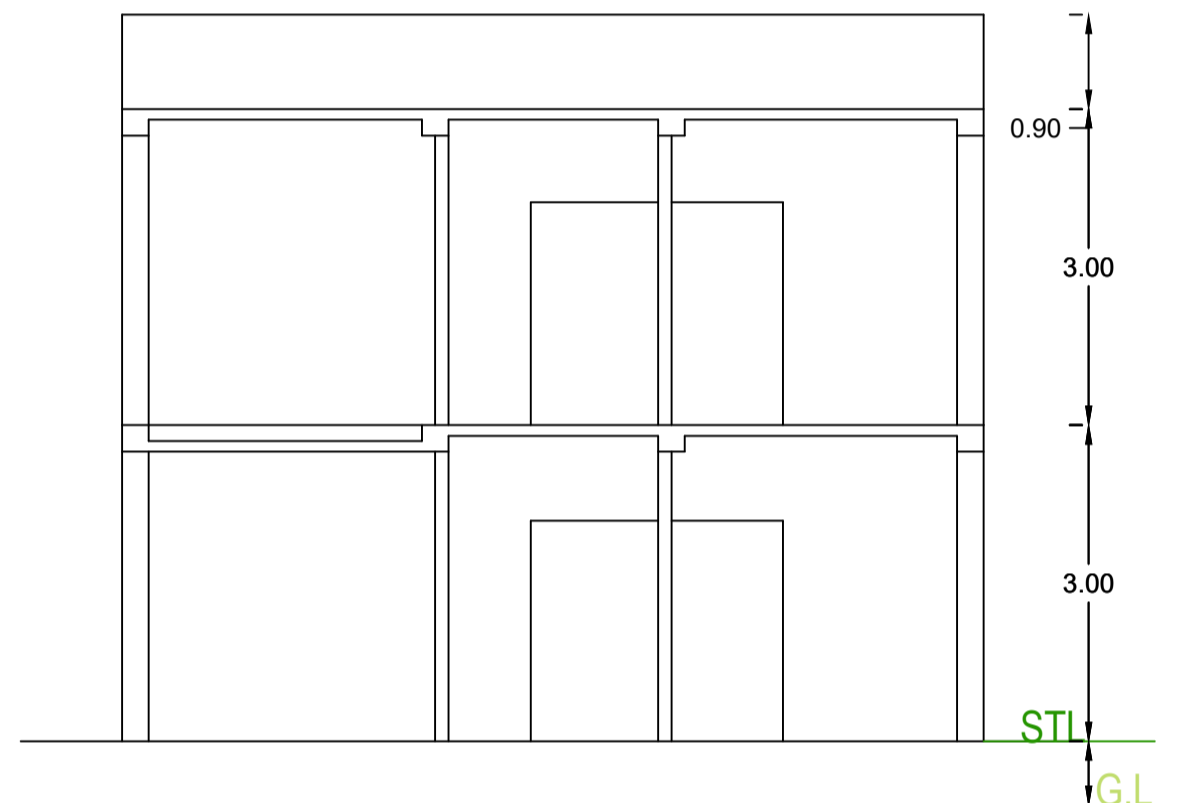


SECTION AT -YY

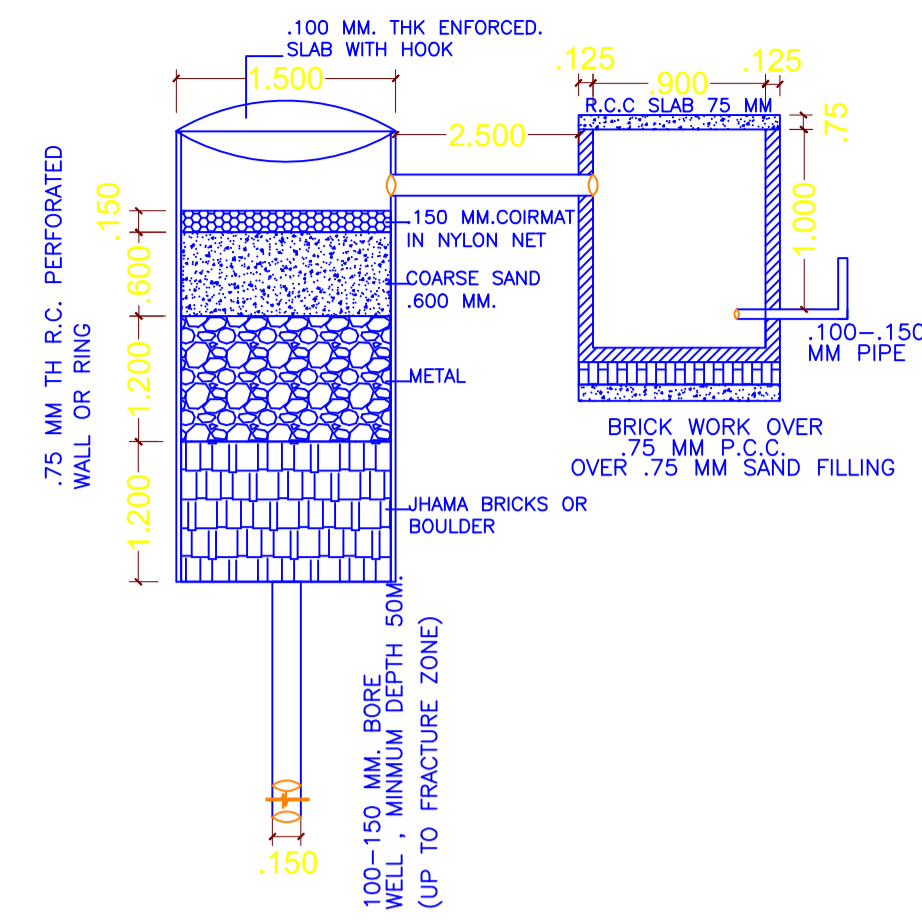

DETAIL OF GROUND WATER RECHAREGING PIT WITH SLIT TANK

(SCALE 1:50)

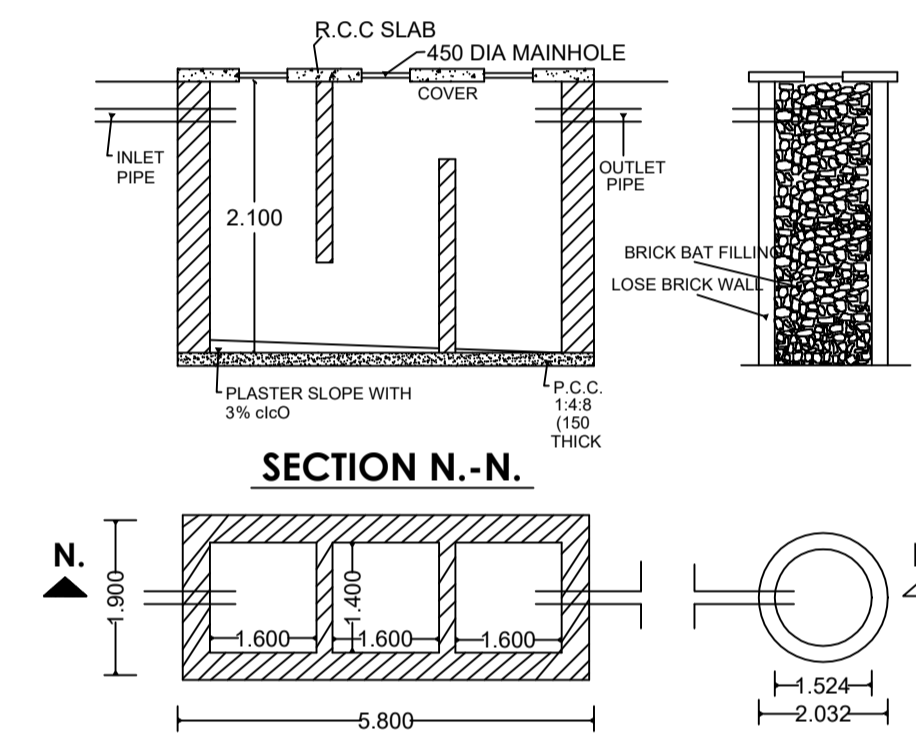

SECTION N.-N.

DETAIL OF SEPTIC TANK & SOAKPIT.

SCHEDULE OF OPENING


SL.NO.	ITEMS	TYPE	WIDTH	HIGHT	SILL LVL.	DISCRPTION
1.	DOOR	D	1.050	2.10	NIL	SINGLE SHUTTER FLUSH DOOR
		D1	.900	2.10	NIL	SINGLE SHUTTER FLUSH DOOR
		D2	.750	2.10	NIL	SINGLE SHUTTER FLUSH DOOR
		D3	1.20	2.10	NIL	SINGLE SHUTTER FLUSH DOOR
2.	WINDOW	W1	1.500	1.200	.900	4 LEAF GLAZED WINDOW
		W2	1.200	1.200	.900	4 LEAF GLAZED WINDOW
		W3	.900	1.200	.900	4 LEAF GLAZED WINDOW
		V	.600	.600	1.500	VENTILATOR

SPECIFICATIONS


- FOUNDATION : SHOWN AS PER FOUNDATION DETAILS.
- FLOOR : 25THK. FLOOR FINISH OVER 75THK. P.C.C.
- D.P.C. : 25THK. D.P.C. AT PLINTH LEVEL IN C.M. MORTAR.
- LINTEL : 150THK. D.P.C. AT PLINTH LINTEL IN C.M. 1:2:4
- ROOF : 100 THK. R.C.C. ROOF SLAB IN C.M. 1:2:4
- SUPER STRUCTURE : 250THK. OF 125THK. 1ST CLASS BRICK WORK IN C.M. MORTAR 1:6.
- PLASTER : 12M THK. CEMENT INTERNAL EXTERNAL.
- WOOD WORK : SAL WOOD CHAUKAT & EXTERNAL.
- SEPTIC TANK : SEPTIC TANK WILL BE FLUSHING SYSTEM.
- REINFORCEMENT : ALL REINFORCEMENT SHALL B OF TOR STEEL OF GRADE FY-415.
- FINISHING : 2 COATS OF WHITE WASH/SCOCEM WASH.

AREA CALCULATION


PLOT AREA AS PER SITE	-	199.66 SQM
GROUND FLOOR AREA	-	114.28 SQM
FIRST FLOOR AREA	-	114.28 SQM
TOTAL BUILT UP AREA	-	228.56 SQM
% OF GROUND COVER AREA	-	57.00 %
TOTAL F.A.R. ACHIEVED	-	1.14

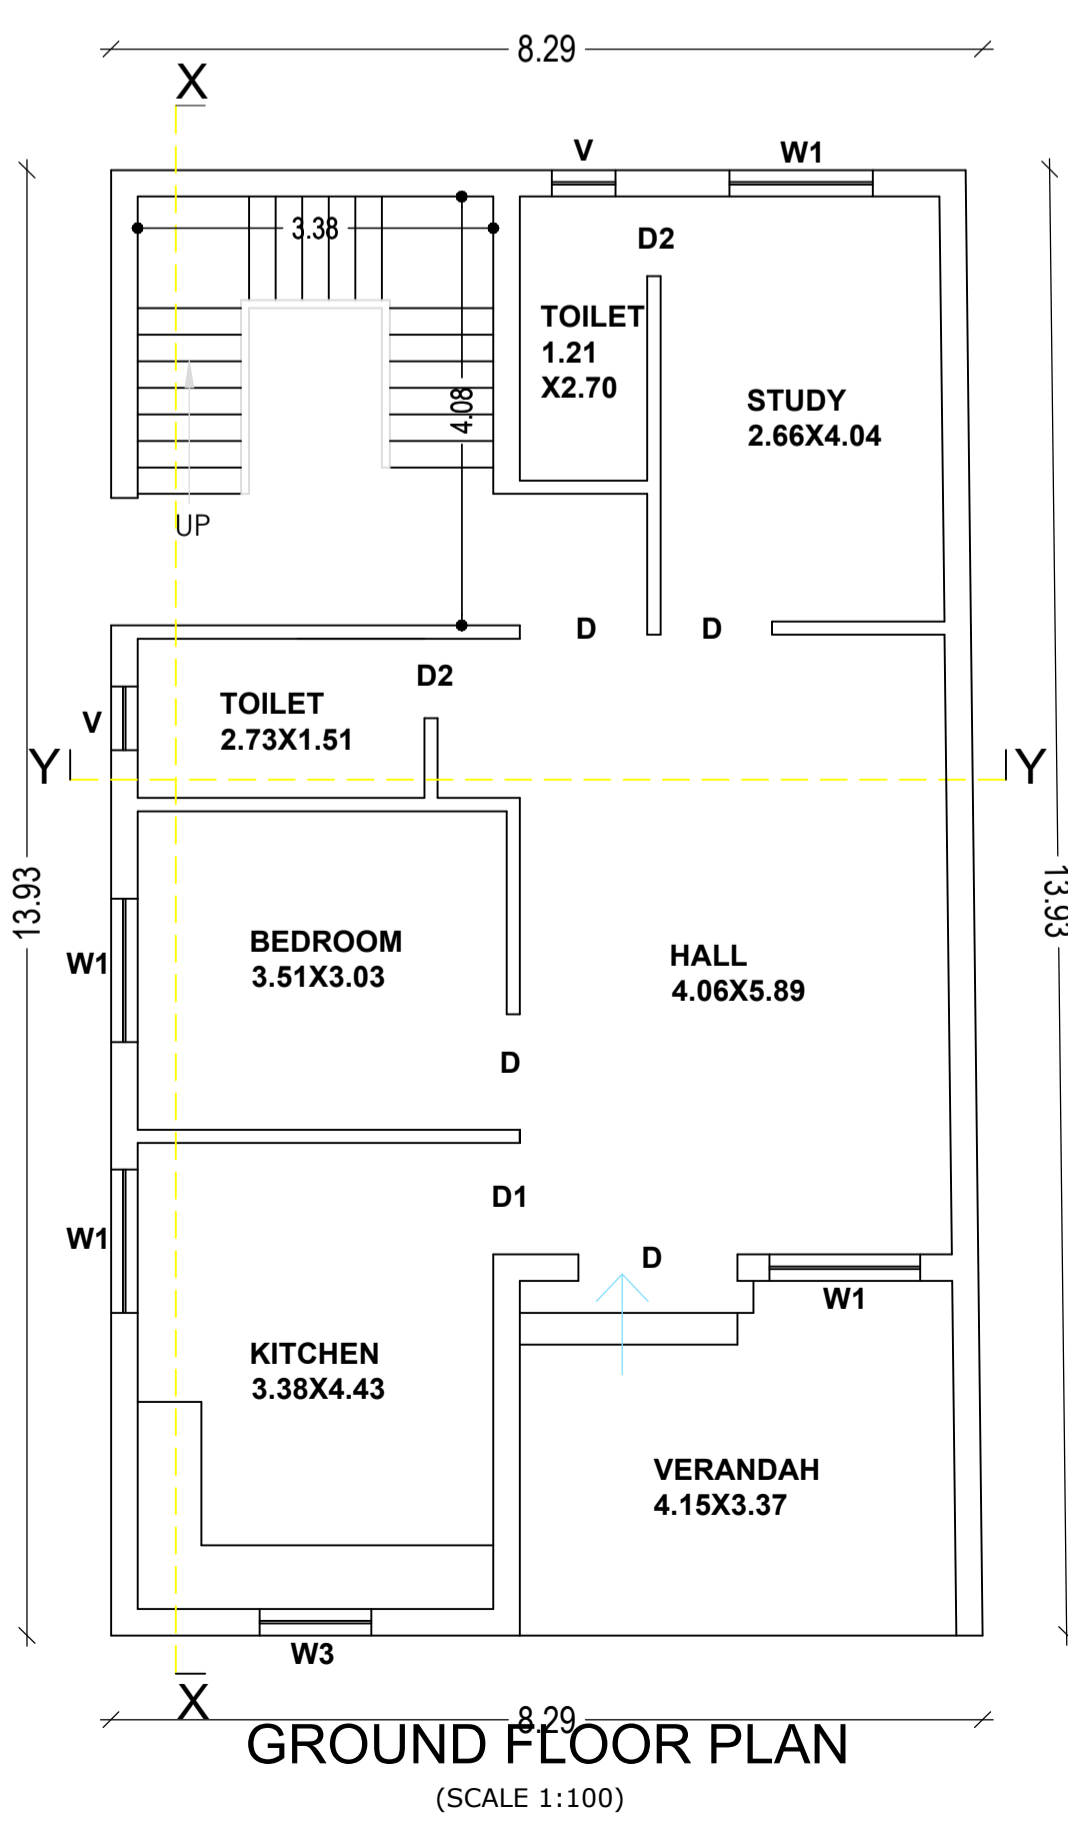


GROUND FLOOR PLAN (SCALE 1:100)

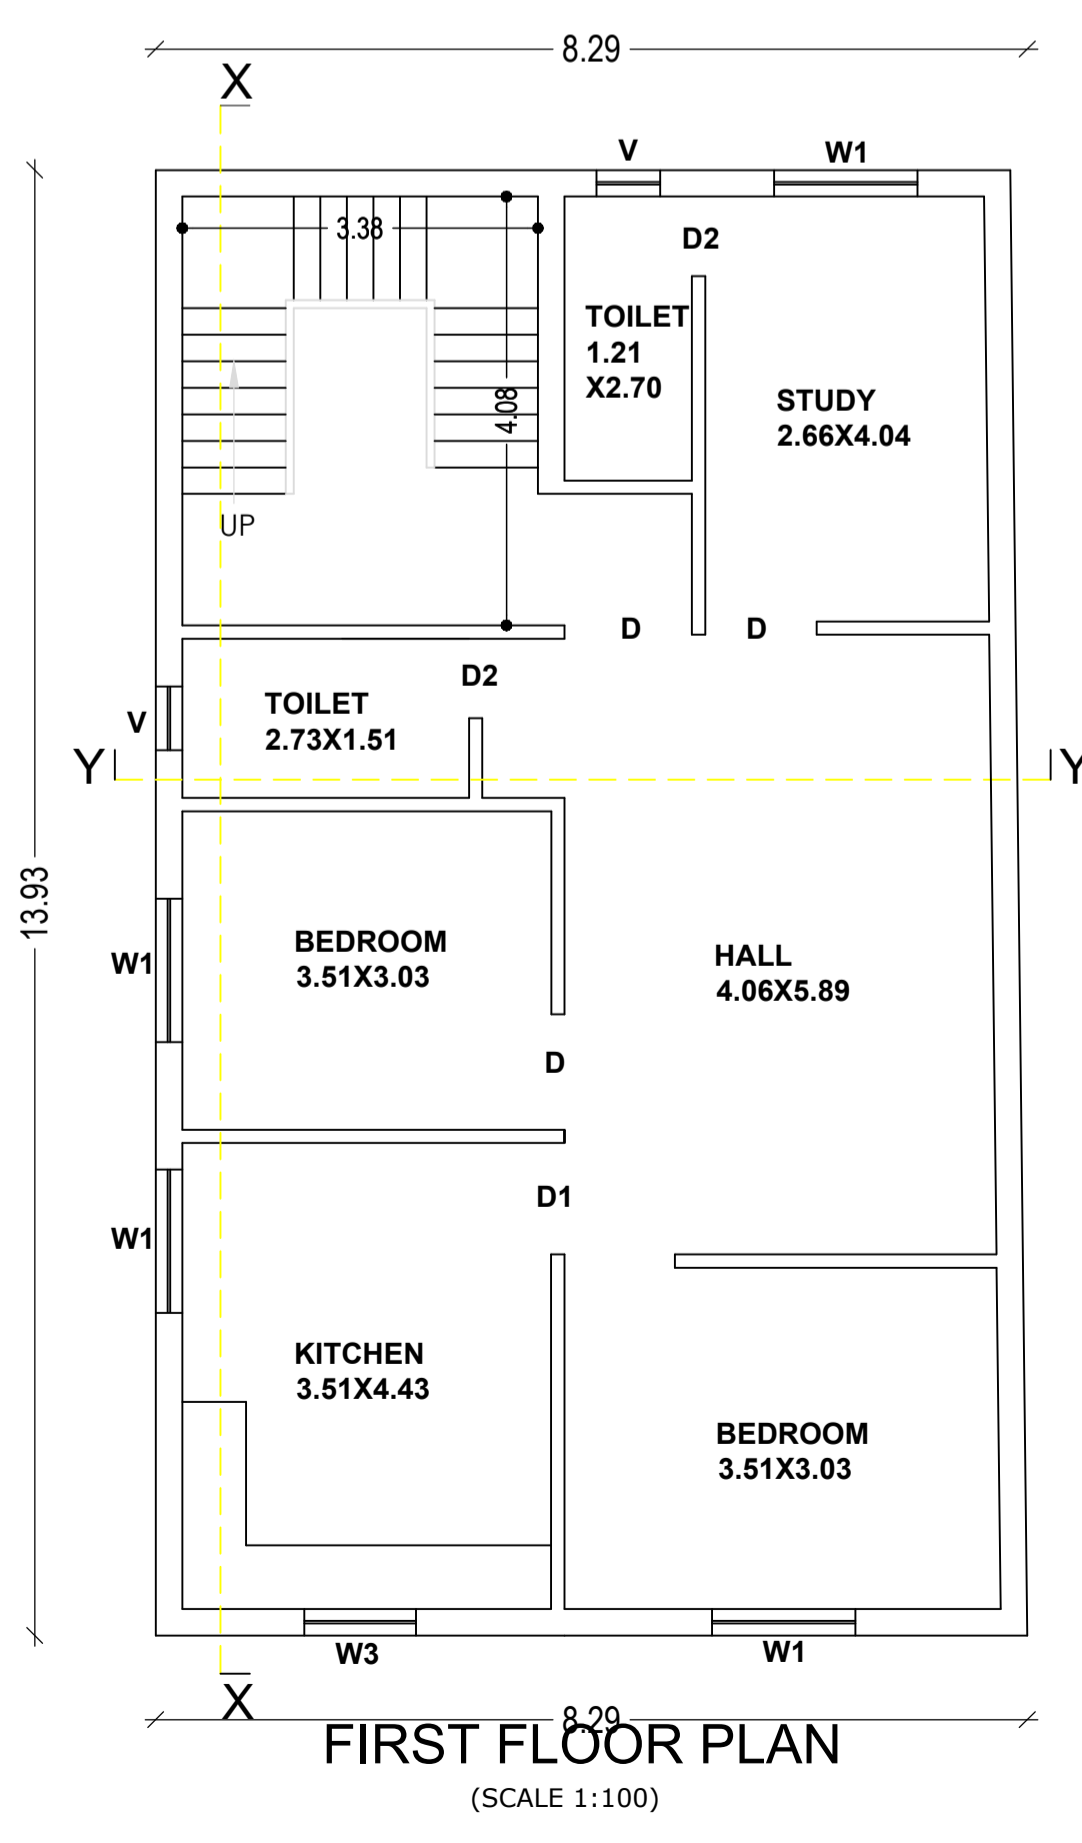

FIRST FLOOR PLAN (SCALE 1:100)

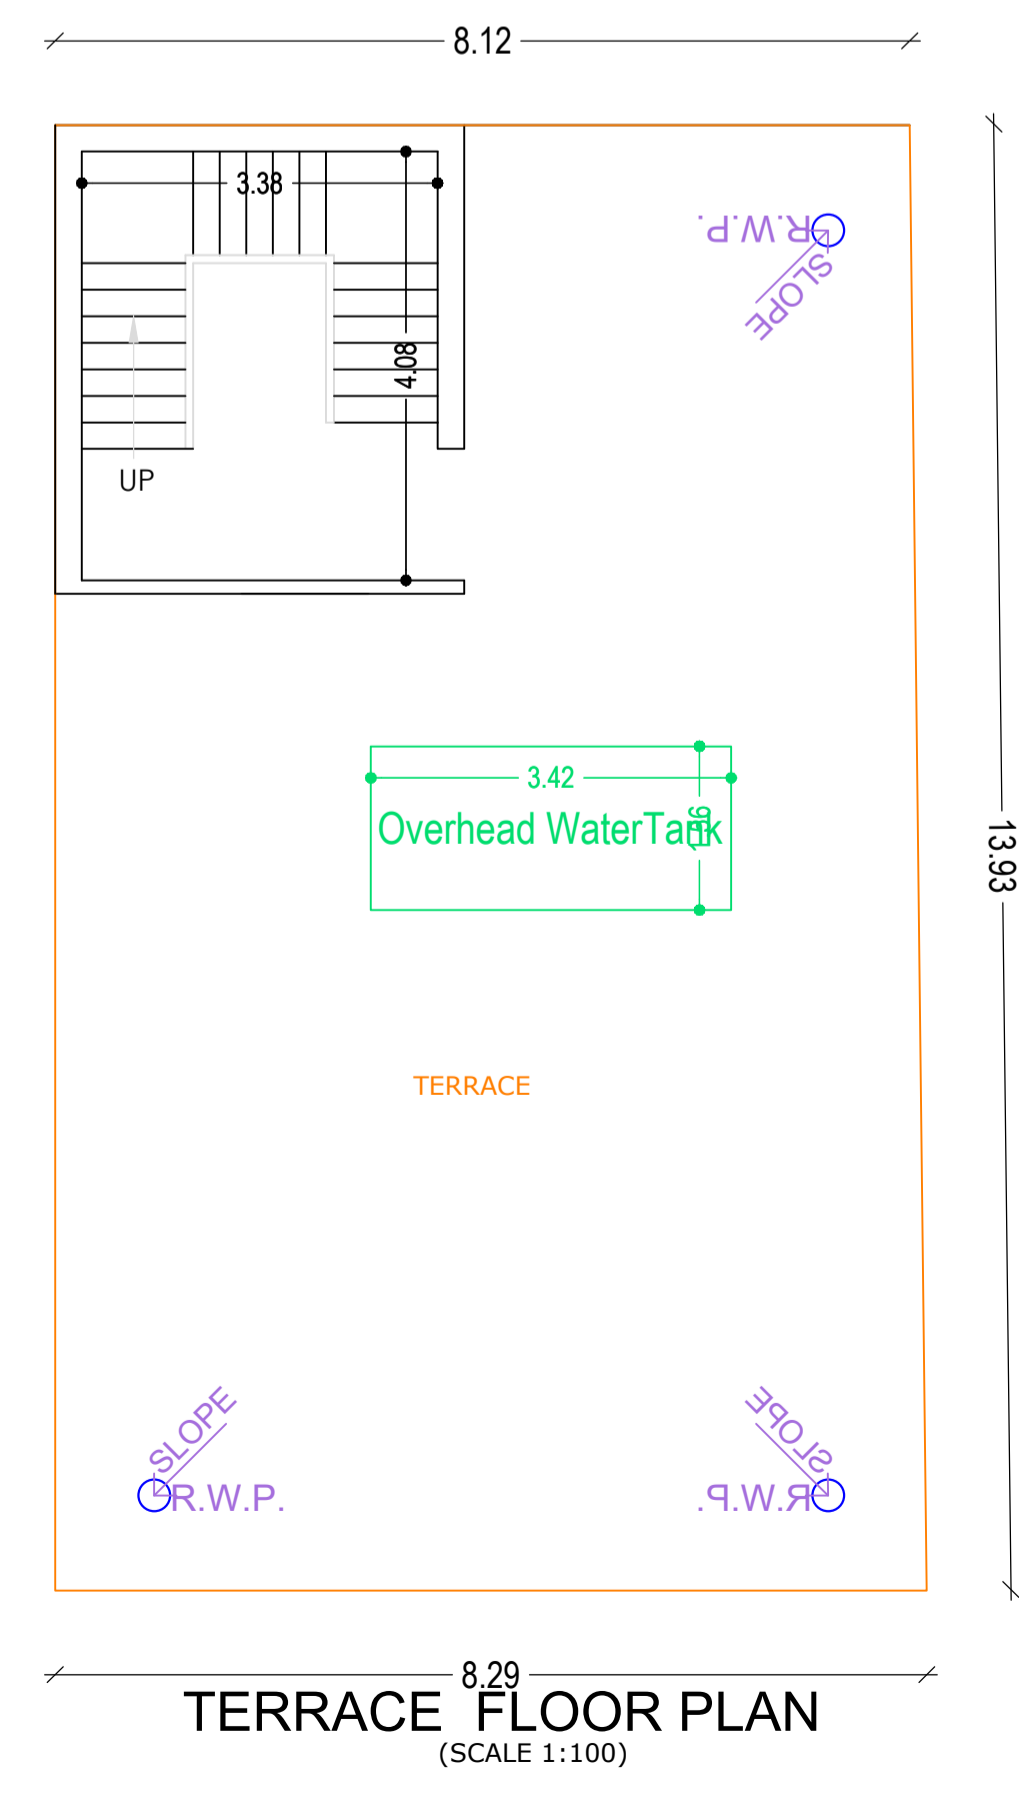

TERRACE FLOOR PLAN (SCALE 1:100)

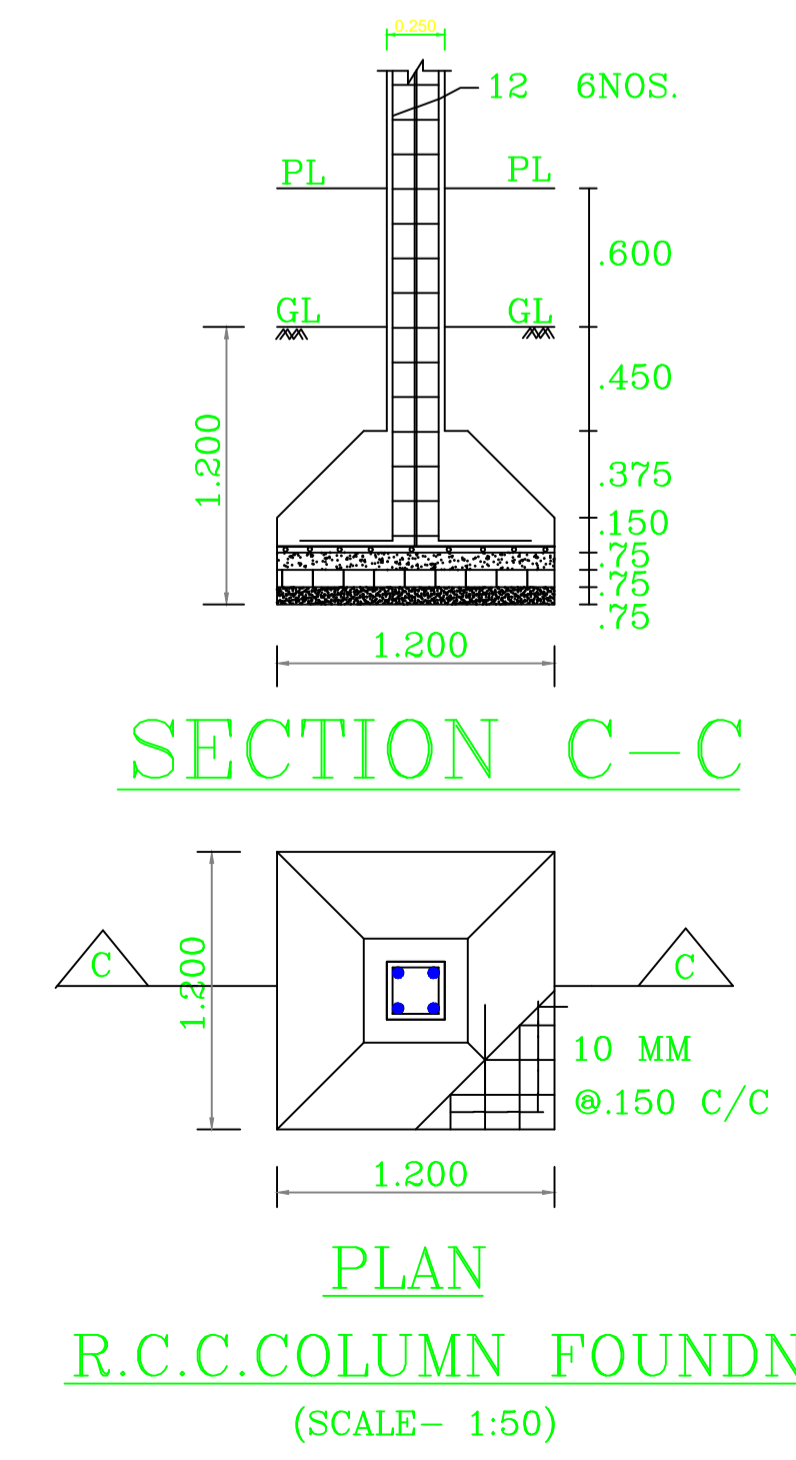

SECTION C-C

PLAN R.C.C. COLUMN FOUNDN. (SCALE - 1:50)

NOTE:- ALL THE DIMENSIONS ARE IN METER.

SIGNATURE OF APPLICANT SIGNATURE OF LIC. ENGINEER