

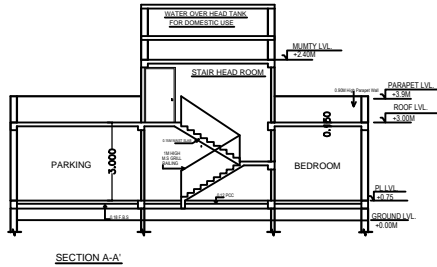


PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT




PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

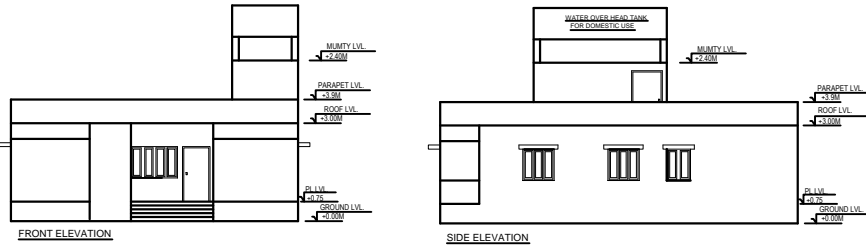

AREA DETAILS

No. of Floors	Area Within Parch line	Parking if Permissible	Other if Permissible	Total (columns 2,3,4)	Net Area for F.A.R.	Occupancy of Use Proposed	Remarks
1	2	11	12	13	14	15	16
Ground Floor	150.5	28.85	X	X	121.65	RESIDENTIAL PARKING	
Total	150.5	28.85	X	X	121.65		

% of Ground Coverage = $\frac{150.5}{226.3} = 66.50\%$ F.A.R. = $\frac{121.65}{226.3} = 0.53$
 (On Plot Area excluding Road Widening strip)

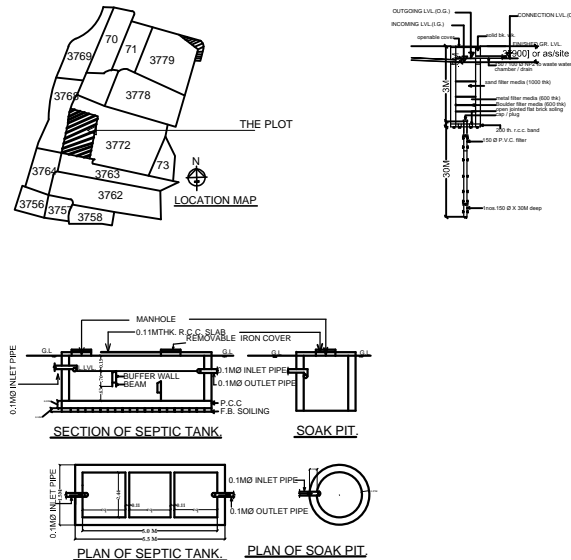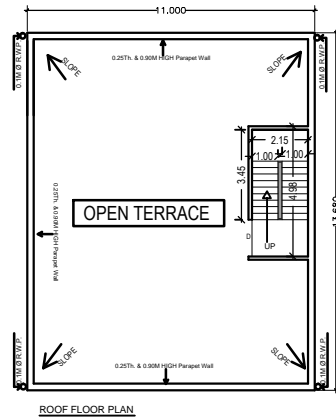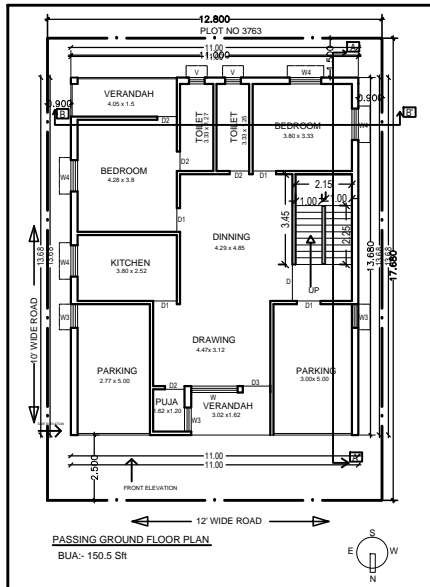

OWNER:-
Mrs. PRATIBHA SHARMA
W/O VIKASH KUMAR RAI

PLOT DETAILS:-
PLOT NO. 3772,
KHATA No. 82, WARD No. 10,
THANA No.1642,THANA : MANGO
MOUZA : MANGO,
DISTRICT : EAST SINGHBHUM

SCHEDULE OF DOOR WINDOW AND VENTILATION

Symbol	Dimensions	Description
D	1.4M X 2.13M	Pannelled Lw single shutter door.
D1	0.80M X 1.3M	Pannelled Lw single shutter door.
D2	0.75M X 1.3M	Pannelled Lw single shutter door.
D3	1.05M X 1.3M	Pannelled Lw single shutter door.
W4	1.2M X 1.2M	Glazed steel framed window 2. shutt.
W3	0.91M X 1.2M	Glazed steel framed window 2. shutt.
V	0.61M X 0.81M	Top hung steel ventilator.

- GENERAL SPECIFICATIONS.
- FOUNDATION :- P.C.C. 1:4:8 WITH BRICK WORK 1:6 UP TO PRINT LEVEL. (R.C.C. FOOTING, AN STEEL DTLS)
 - PLAC :- 1:3 THICK. UP TO PRINT LEVEL.
 - SUPPER STRUCTURE :- BRICK WORK 0.22 & 0.14 THICK (1:6) LINTIL, CHABA.
 - FINISHING :- 10mm THICK ELEMENT CONC. WITH 8mm THK. LPS. FLOOR FINISH. STAIR CASE AS STRUCTURAL DETAIL.
 - ROOF :- 14mm THICK R.C.C. SLAB WITH AVERAGE 14mm THICK BRICK BATS, KHADA ON TOP.
 - INNER FLOOR :- 0.15 THK. R.C.C. SLAB WITH 25mm THK. LPS. FLOOR FINISH ON TOP.
 - PLASTER :- 2mm THK. ELEMENT PLASTER TO BE PROVIDED IN SIDE.
 - TOILET :- 1:4:8 CONC. WITH 8mm THK. LPS. TO BE CONNECTED ROAD SEWER LINES. (W.C. SHOWERS, WASH BASINS ETC. WITH FIRST)
 - DOOR :- SALWOOD FRAME WITH 1.5 THK. FLUSH OR PANNELLED SHUTTER
 - WINDOW :- SALWOOD FRAME WITH FLUSH PANELLED GLAZED SHUTTER MS GRIL TO BE PROVIDED AS STRUCTURAL DETAILS

SIGNATURE OF OWNER :-

SIGNATURE OF CONSULTANT

CHRAVA ARCHITECT & CONSULTANTS
Office: Third Floor, 7th Building, Sakari
M-8789124115 9234604601

ENGINEER

OFFICER