



SECTION S-S
SCALE 1:100

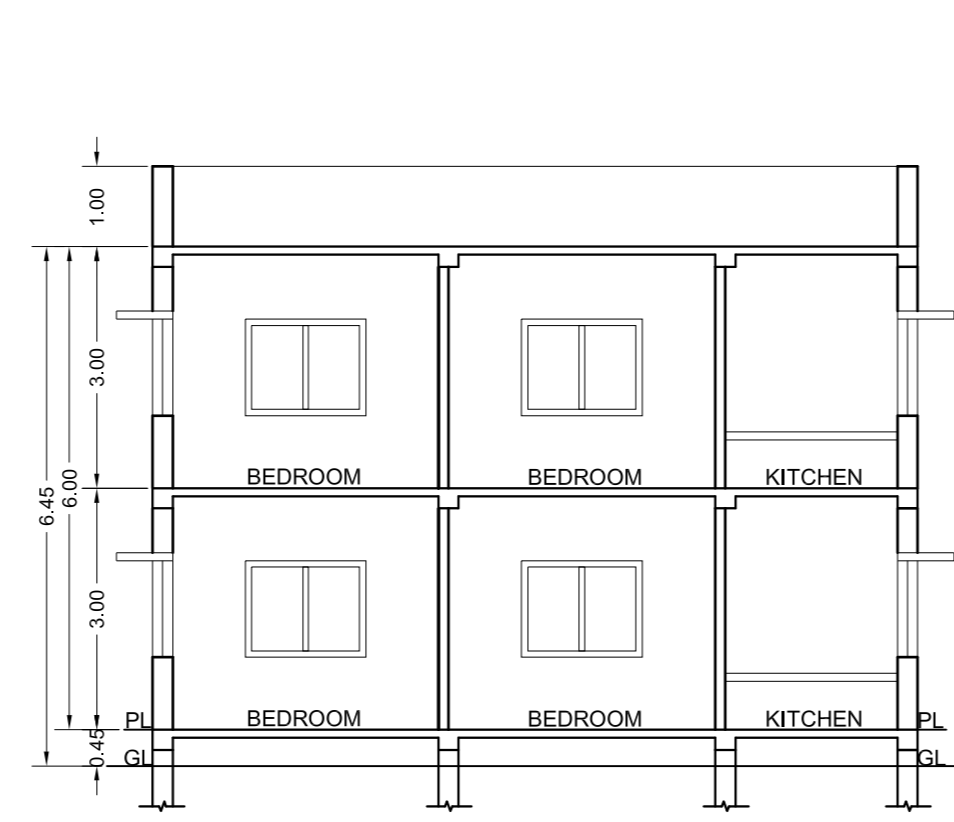


SECTION A-A
SCALE 1:100

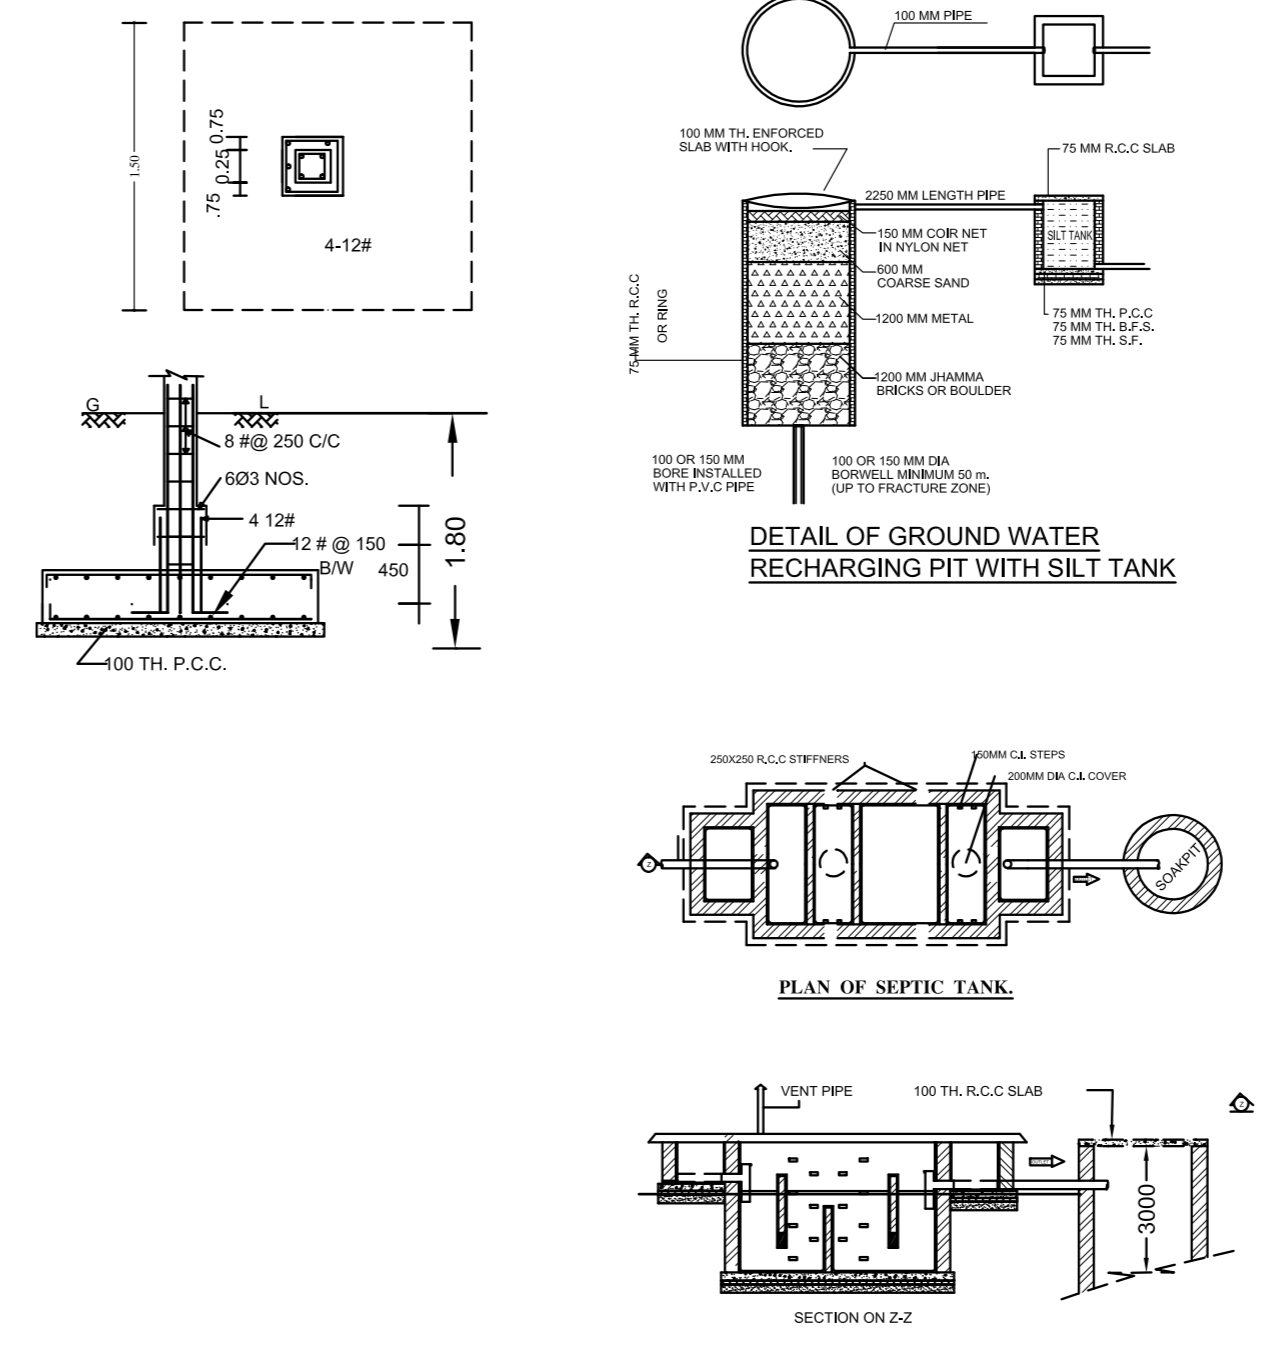


DETAIL OF GROUND WATER RECHARGING PIT WITH SILT TANK

PLAN OF SEPTIC TANK


SECTION ON Z-Z

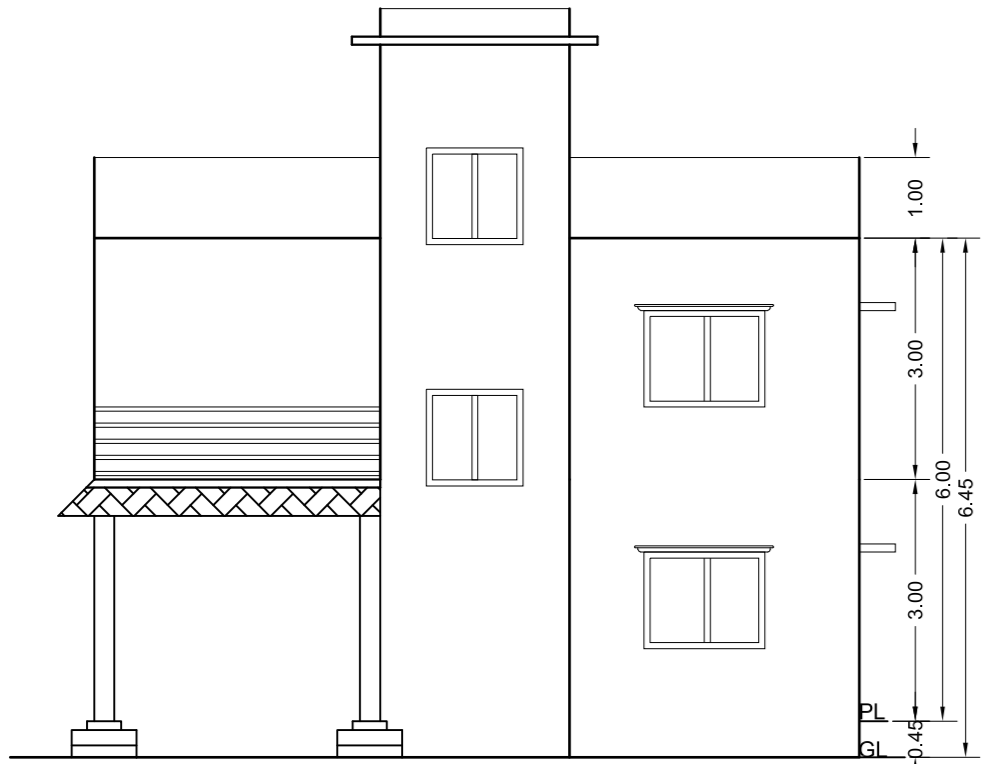


FRONT SIDE ELEVATION
SCALE 1:100

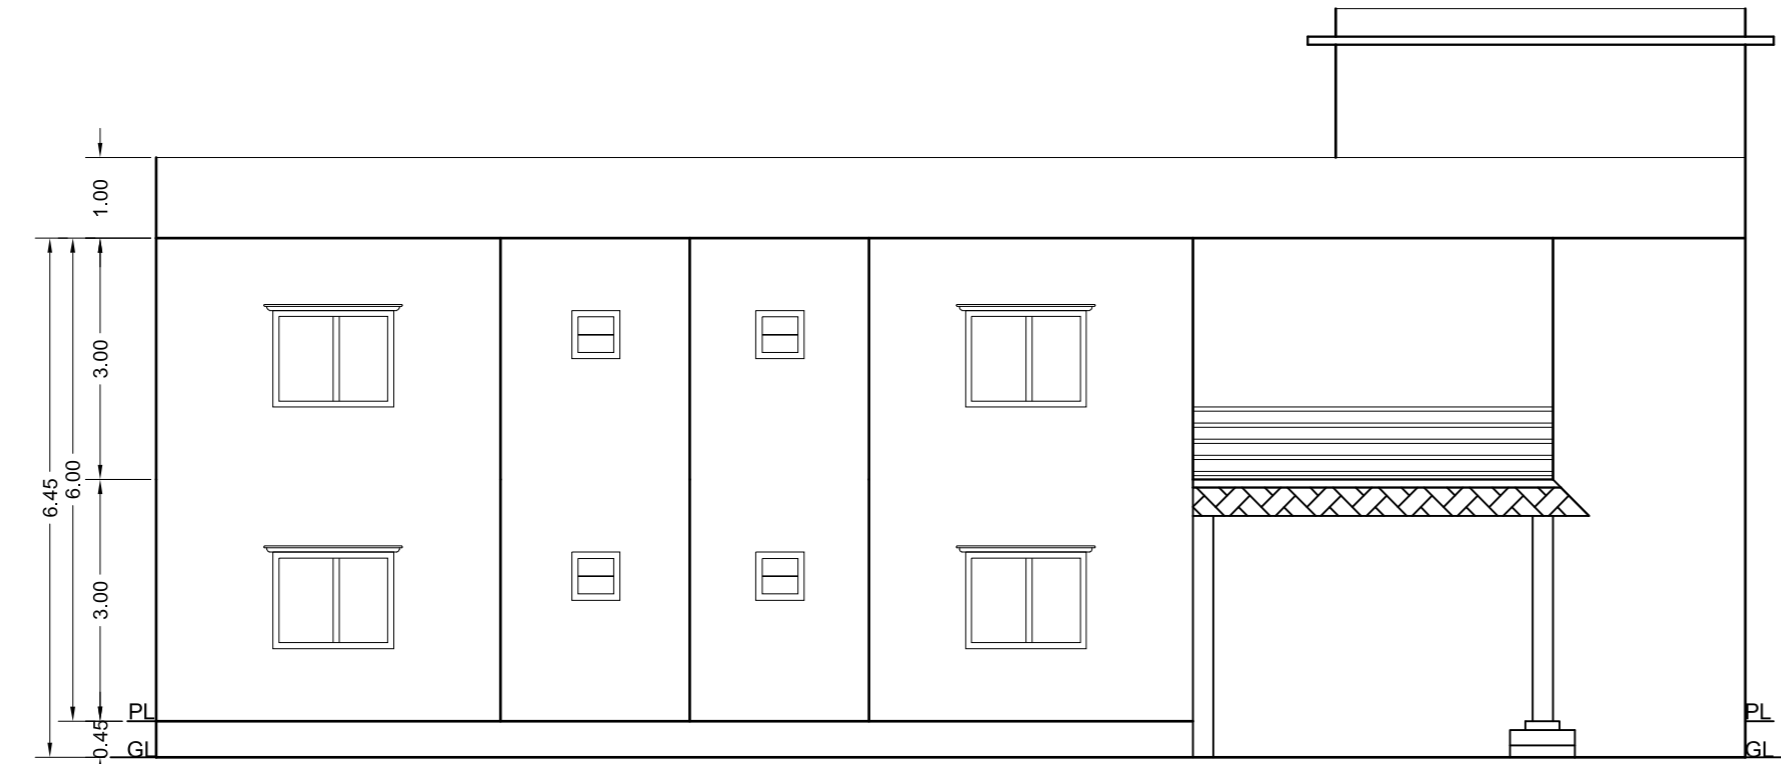


LEFT SIDE ELEVATION
SCALE 1:100

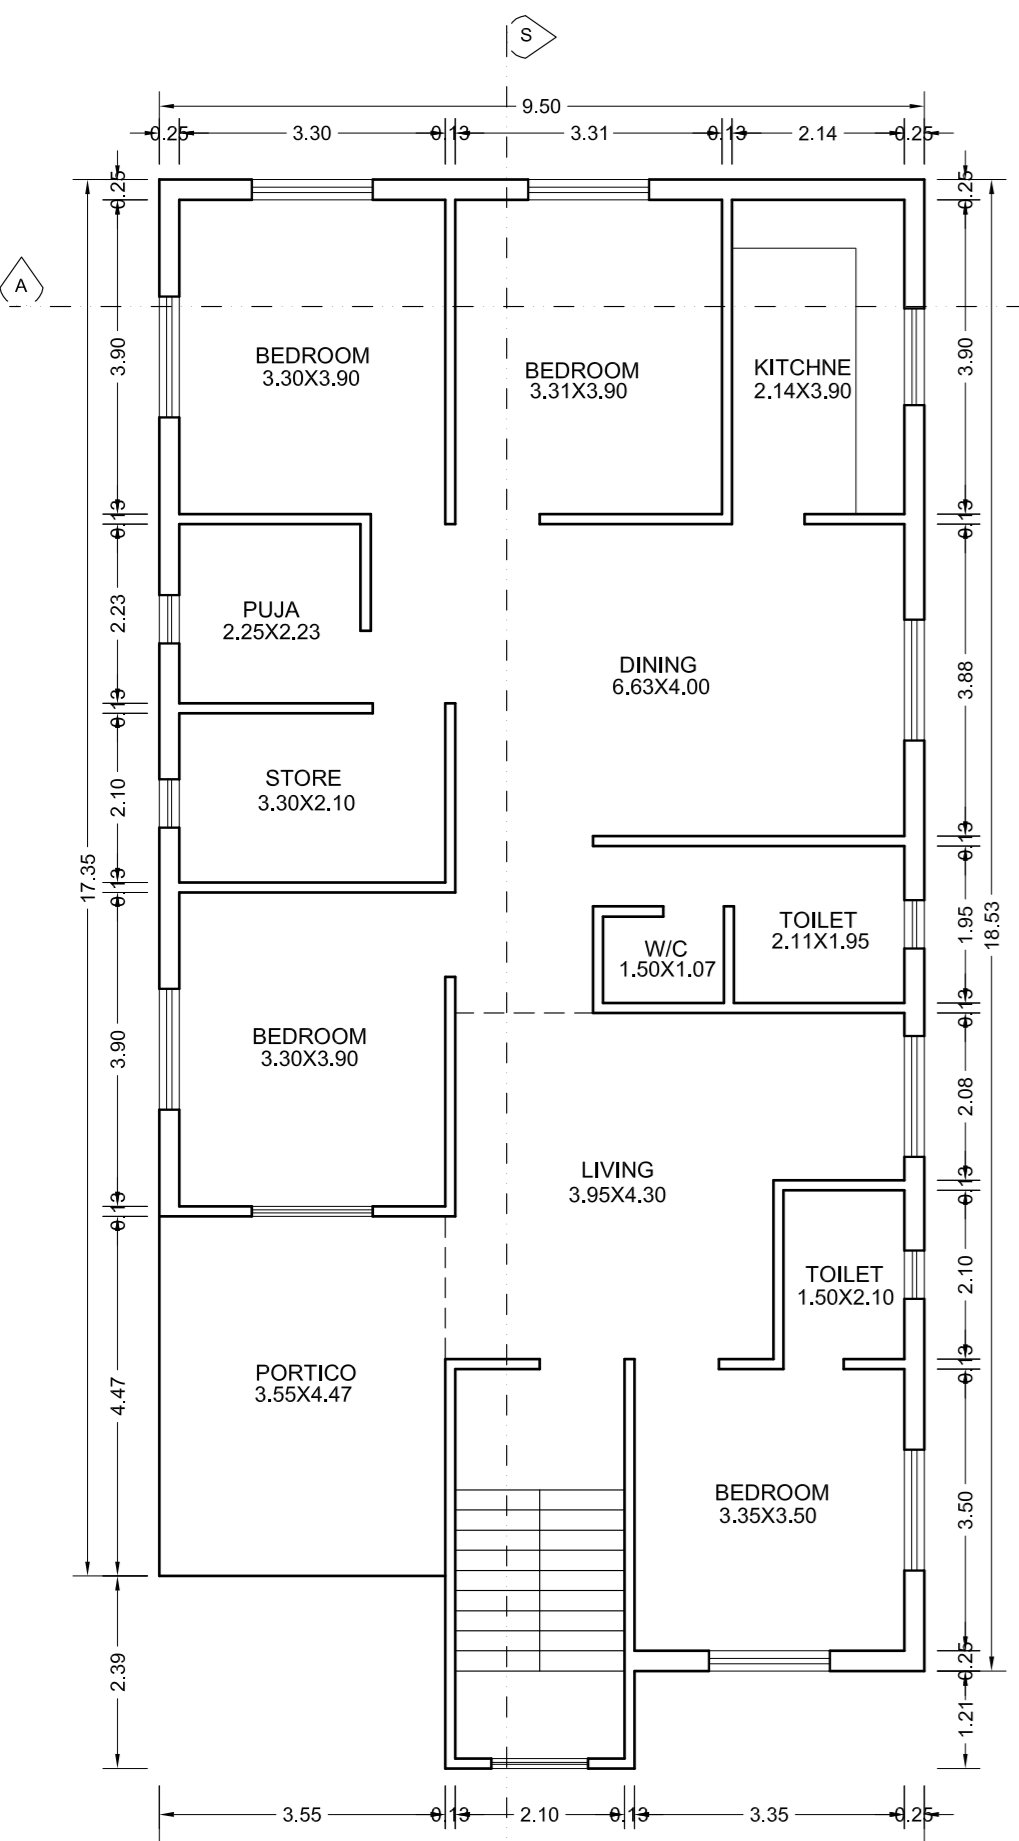


GROUND FLOOR PLAN
SCALE 1:100

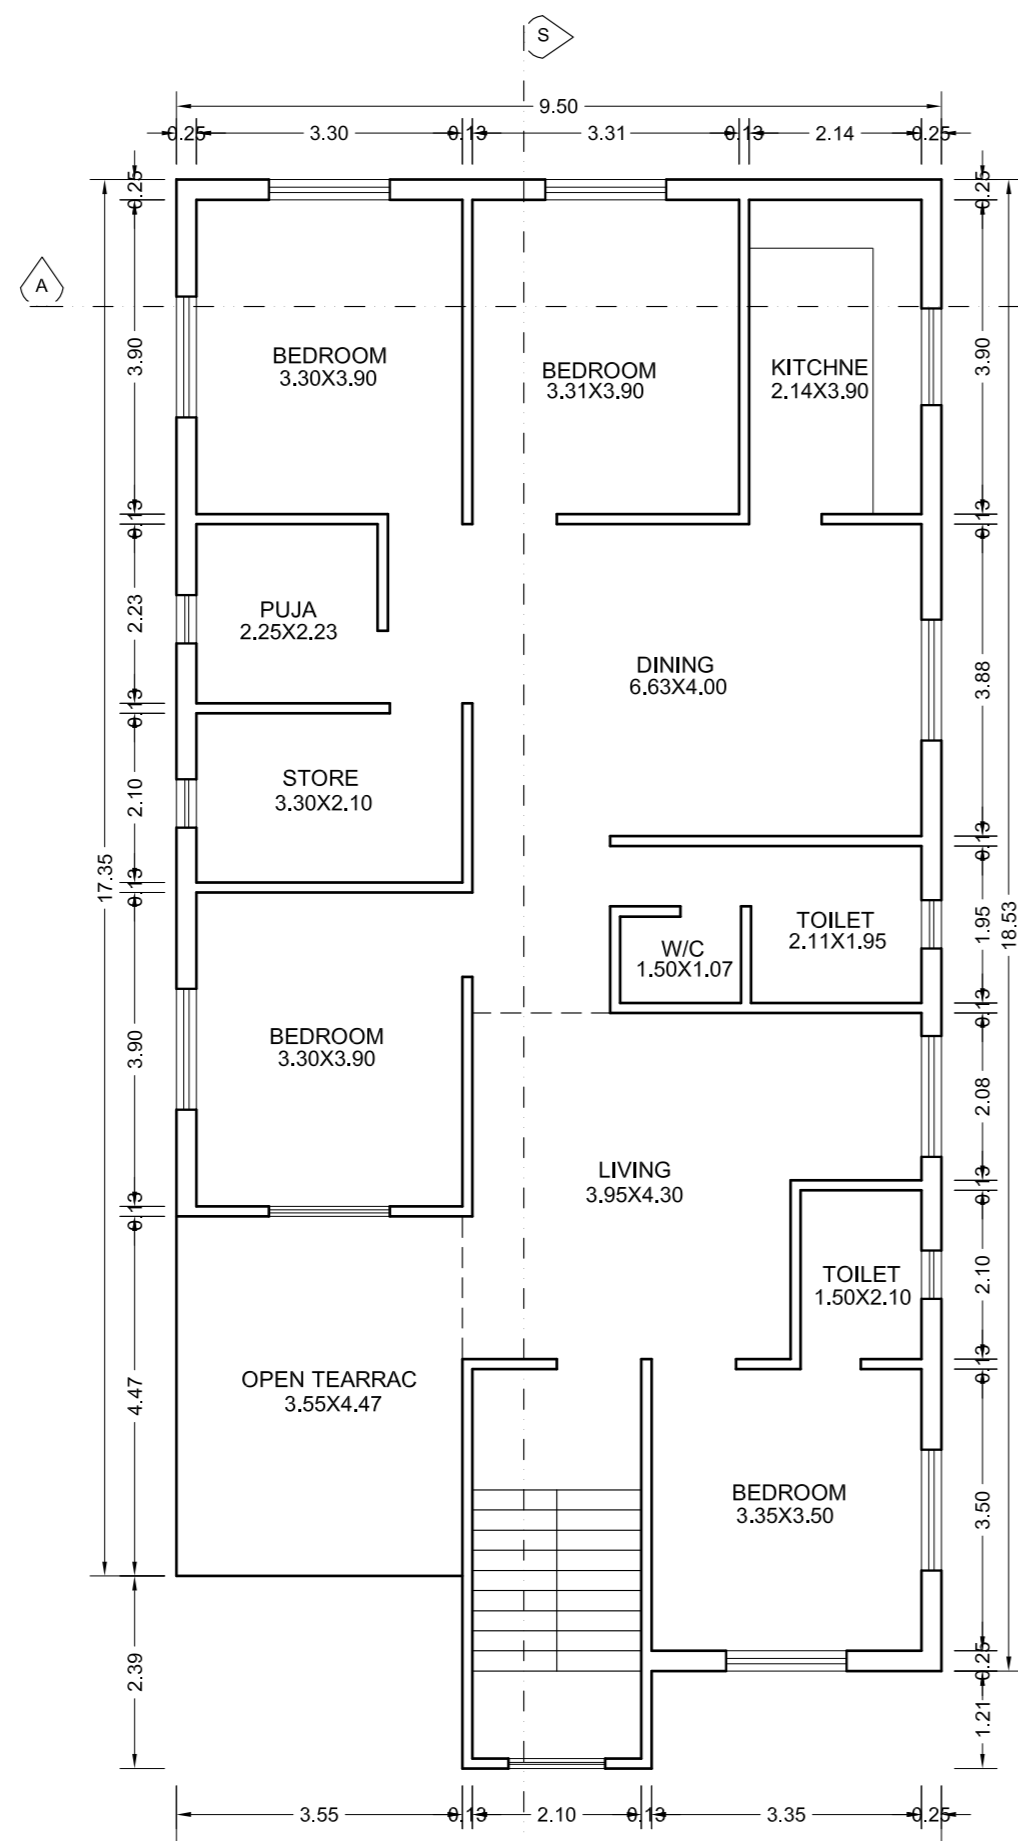

FIRST FLOOR PLAN
SCALE 1:100

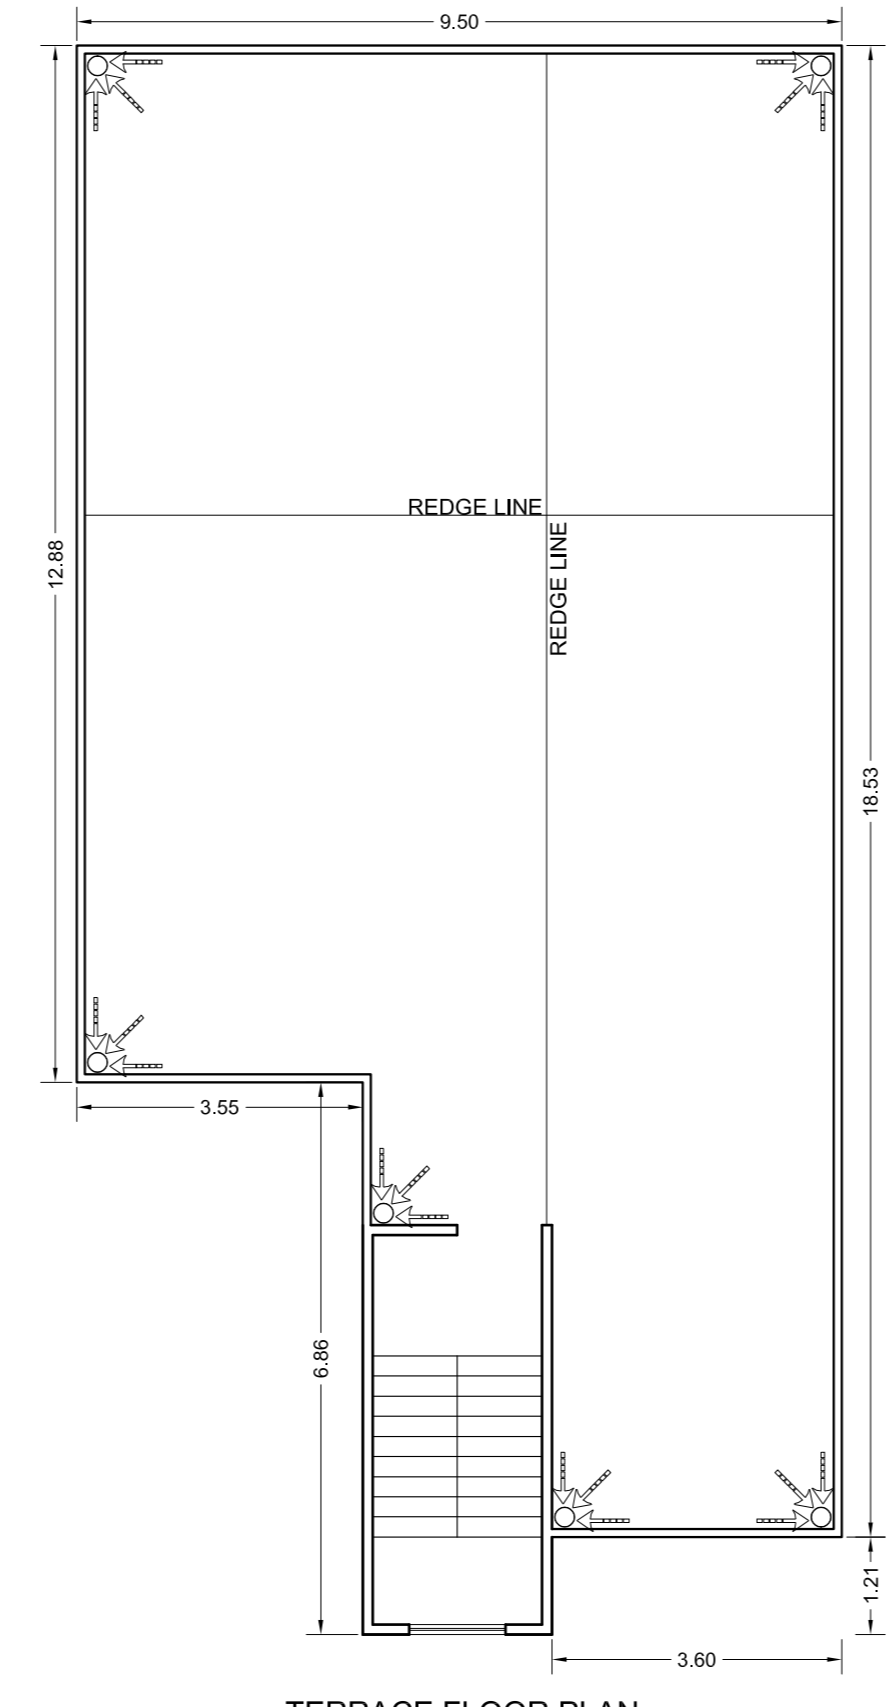

TERRACE FLOOR PLAN
SCALE 1:100

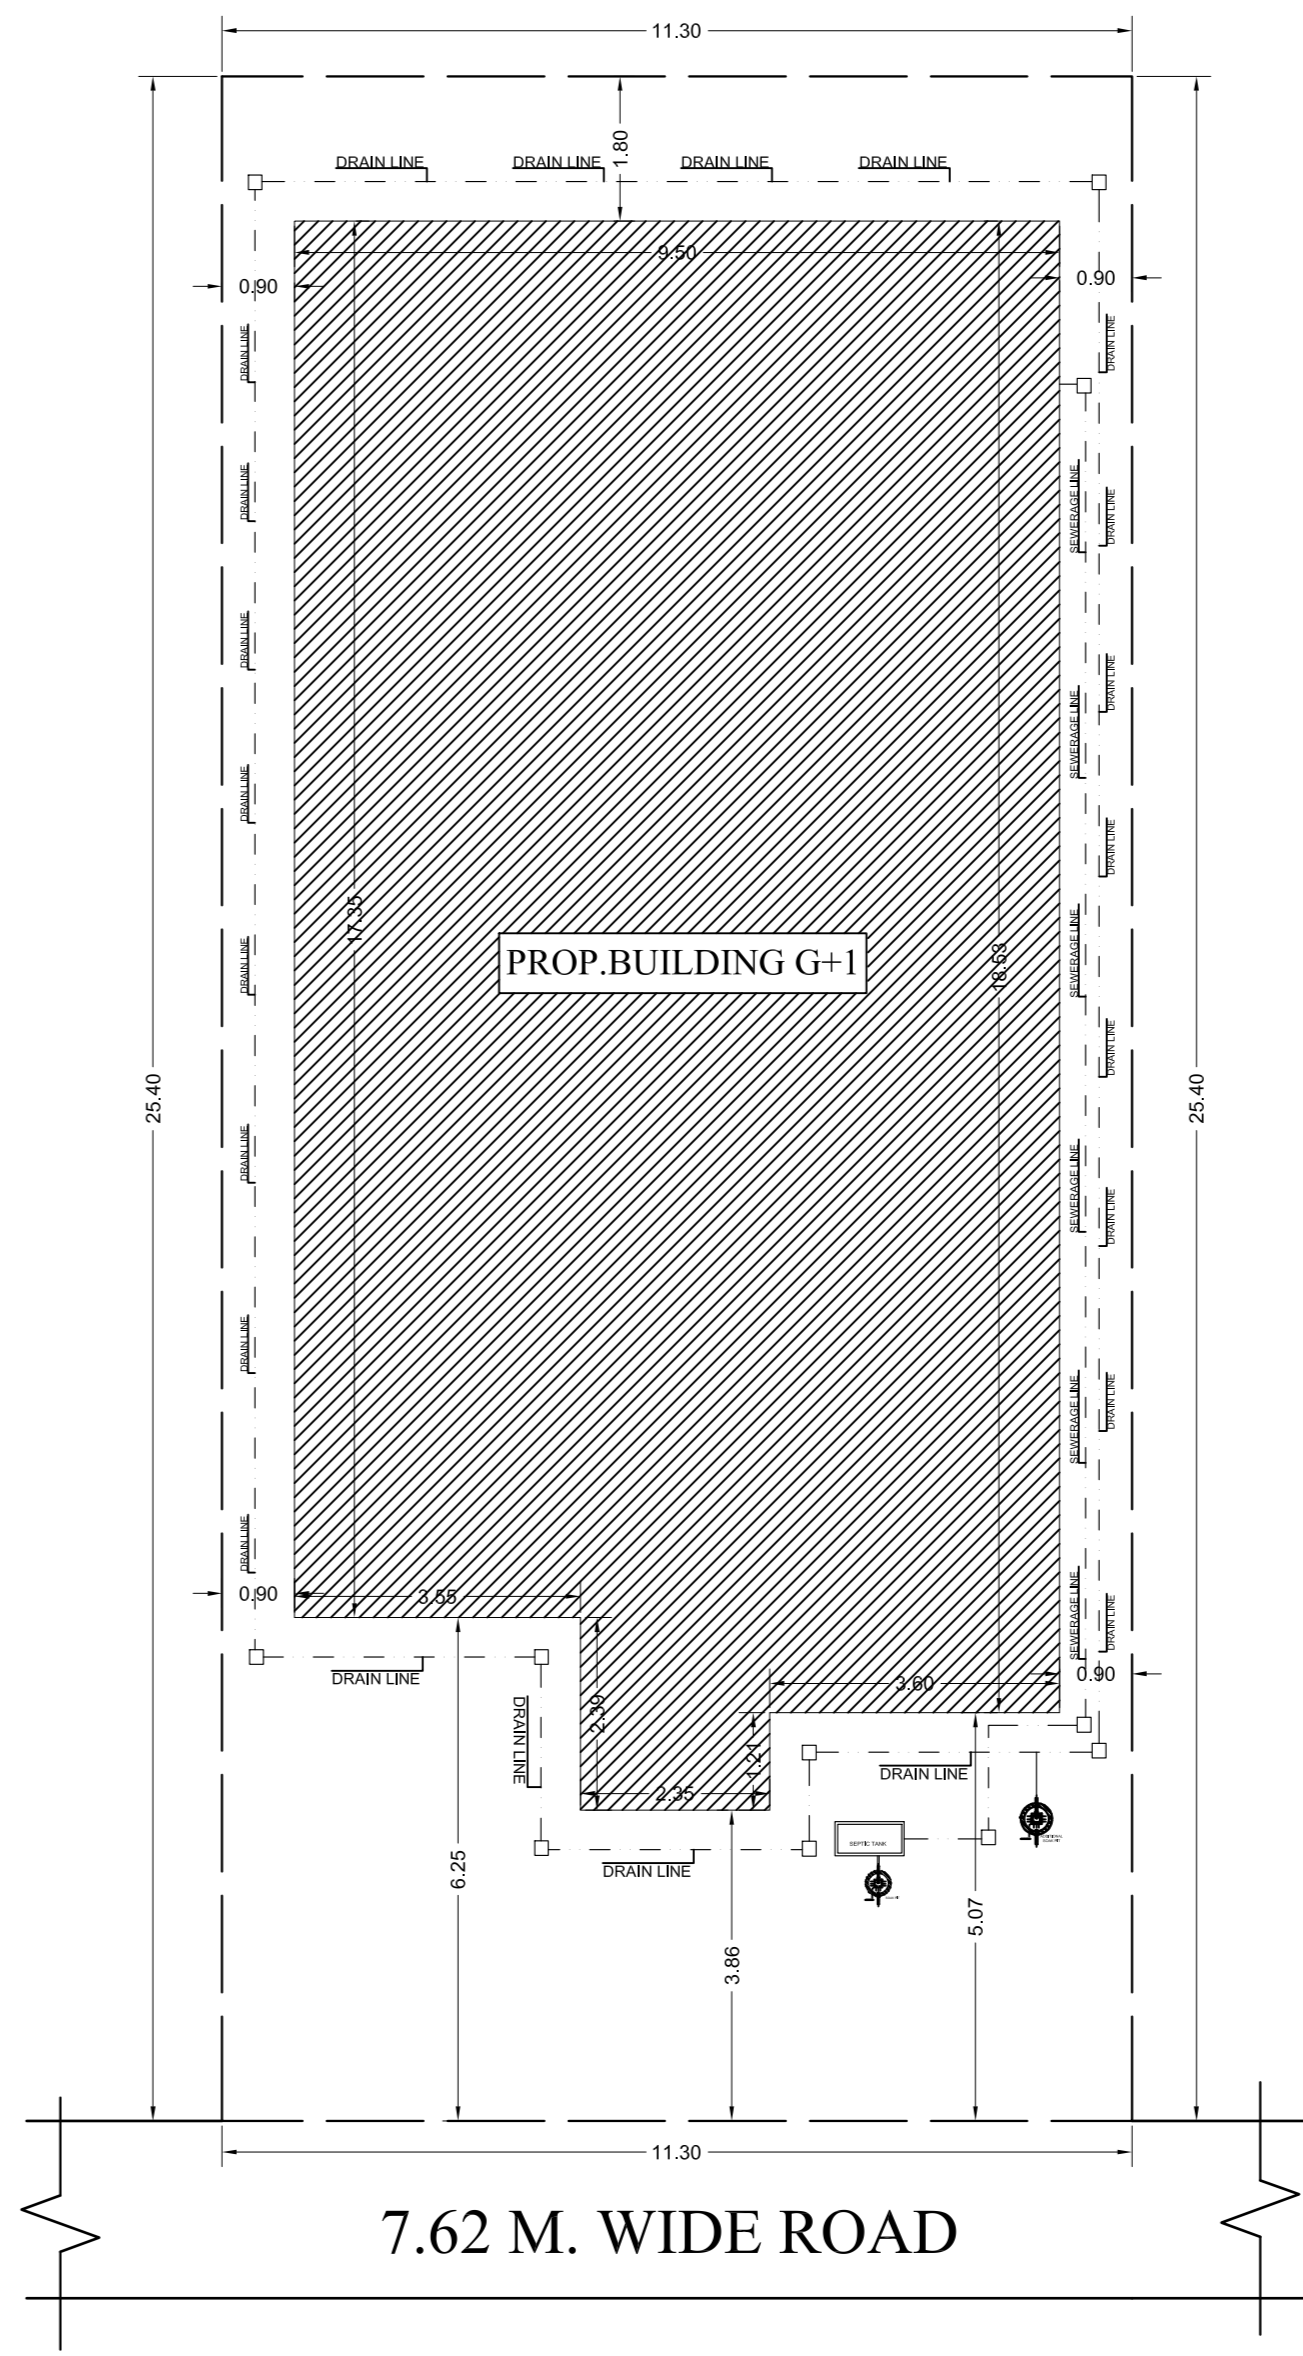

SITE PLAN
SCALE=1:100

THIS IS SAFTY THAT THE STRUCTURAL DESINE OF THIS BUILDING IS AS PER IS CODE 189-1884-8 1993 TO MAKE THE SAME EARTH QUAKE RESISTANT.

SPECIFICATION

- BRICKWOR IN FOUNDATION \$ PLINTH SHALL BE FIRST CLASS BRICK IN CEMENTMORTAR [3:6 AND HALBRICK WILL BE [4:CEMENT MORTAR
- ROLLING GLAZING/ STRUCTURAL GLAZING OF GOOD QUALITY AND MARK VENTILATOR SYSTEM SHALL BE USED.
- ROLLING SHUTTERS SHALL BE USED FOR SHOPS OPENING.
- M.S GLAZED/ANODIZED ALUMINIUM INCL SECCLOR WINDOW AND R.C.C WITH CEMENT MORTAR [4
- ALL R.C.C WORKS SHALL BE DONE IN [2:4 MIX CONCRETE
- TATA TMT STEEL BARS SHALL BE USED IN R.C.C STRUCTURES
- ALL MASONARY SURFACE SHALL BE PLASTERED WITH CEMENT MORTOR [3:6. OVER R.C.C SLAB [R.C.C.
- ALL STEEL AND WOOD WORK SHALL BE PAINTED WITH SYNTHETIC ENML.PAINT.
- ALL SANITARY AND ELECTIONAL FITTINGS SHALL BE OF STANDARD MAKE AND WORKMENSHP.
- KOTTA STONE MOSAIC FLOORING INCLUDING STAIRCASE SHALL BE USED

SCHEDULE OF DOORS & WINDOWS

SIZE	NO.
1025X2100	1
900X2100	1
750X2100	1
1500X1200	1
900X1200	1
600X600	1

AREA STATMENT

TOTAL PLOT AREA AS DEED	***** SQ.M.	
TOTAL PLOT AREA AS PER SITE	287.00 SQ.M.	
NET PLOT AERA AFTER	287.00 SQ.M.	
	BUILTUP AREA	F.A.R AREA
GROUND FLOOR AREA	158.79 SQ.M	158.79 SQ.M
FIRSR FLOOR AREA	158.79 SQ.M	158.79 SQ.M
TOTAL AREA	317.58 SQ.M	317.58 SQ.M
% OF GROUND COVERAGE = 55.32%		F.A.R. = 1.10

OWNER DETAIL

Sheet	
ALL DIAMENTION ARE IN M.	
ISSUE ONLY FOR	
Submission/construction	
TITLE- SUB. DRG.	
APPLICANTS SIGN.	SIGN. OF LIC. ENG.