




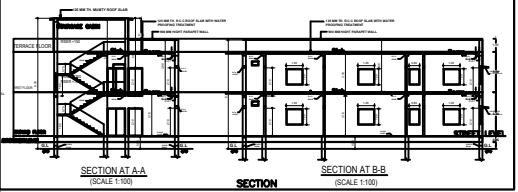
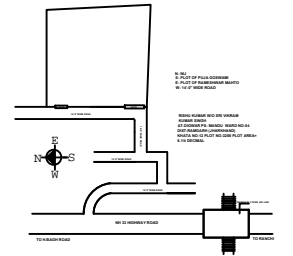



**Project Title :G+1 RESIDENTIAL BUILDING**



**SCHEDULE OF DOORS, WINDOWS & VENTILATORS**

TYPE	WIDTH	HEIGHT	MATERIALS	REMARKS
D	1000	2100	WOODEN-FRAMED WOODEN DOORS	DO
D1	875	2100	WOODEN-FRAMED WOODEN DOORS	DO
D2	1000	2100	WOODEN-FRAMED WOODEN DOORS	DO
D3	750	2100	WOODEN-FRAMED WOODEN DOORS	DO
W	1800	1200	ALUMINIUM WINDOW	DO
W1	1200	1200	ALUMINIUM WINDOW	DO
W2	900	1200	ALUMINIUM WINDOW	DO
W3	600	800	ALUMINIUM WINDOW	DO


- SPECIFICATION**
- FOUNDATION - R.C.C PAD FOUNDATION AS PER STRUCTURAL DESIGN
  - SUPER STRUCTURE - BEAMS & COLUMNS R.C.C FRAME STRUCTURE FILLED WITH 200 MM TH BRICK WORK ON THE EXTERNAL PANEL, SIDE & CEILING TH BRICK WORK IN ALL INTERNAL SIDE
  - D.P.C. - 25 MM TH P.C.C 1:2:4 WITH ANY WATER PROOFING COMPOUND
  - FLOORING - TERRAZO IN STU/P/S/ROTA OR MARBLE AT SUITABLE PLACE
  - TATA TMT STEEL BARS SHALL BE USED IN R.C.C STRUCTURES. COMMERCIAL QUALITY.
  - WOODEN DOOR - WITH WOODEN FRAMED
  - M.S GLAZED/WOODEN ALUMINIUM GLAZED WINDOW AND SHUTTER
  - ALL MASONRY SURFACE SHALL BE PLASTERED WITH CEMENT MORTAR 1:6. ALL MASONRY SURFACE SHALL BE PLASTERED WITH CEMENT MORTAR 1:6 OVER R.C.C BARS P.C.C.
  - ALL STEEL AND WOOD WORK SHALL BE PAINTED WITH SYNTHETIC EMUL PAINT
  - ALL SANITARY AND ELECTRICAL FITTINGS SHALL BE OF STANDARD MAKE
  - KOTTA STONE MOSAIC FLOORING INCLUDING STAIRCASE SHALL BE USED

**AREA STATEMENT**

DRAWN BY -



SING. OF OWNER      SING. OF LIC. ENG.

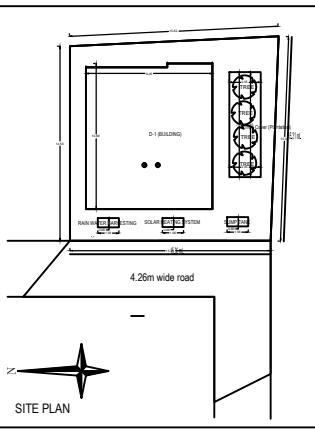

NO.	DESCRIPTION	UNIT	QUANTITY	REMARKS
1	...	...	...	...
2	...	...	...	...
3	...	...	...	...
4	...	...	...	...
5	...	...	...	...
6	...	...	...	...
7	...	...	...	...
8	...	...	...	...
9	...	...	...	...
10	...	...	...	...
11	...	...	...	...
12	...	...	...	...
13	...	...	...	...
14	...	...	...	...
15	...	...	...	...
16	...	...	...	...
17	...	...	...	...
18	...	...	...	...
19	...	...	...	...
20	...	...	...	...
21	...	...	...	...
22	...	...	...	...
23	...	...	...	...
24	...	...	...	...
25	...	...	...	...
26	...	...	...	...
27	...	...	...	...
28	...	...	...	...
29	...	...	...	...
30	...	...	...	...
31	...	...	...	...
32	...	...	...	...
33	...	...	...	...
34	...	...	...	...
35	...	...	...	...
36	...	...	...	...
37	...	...	...	...
38	...	...	...	...
39	...	...	...	...
40	...	...	...	...
41	...	...	...	...
42	...	...	...	...
43	...	...	...	...
44	...	...	...	...
45	...	...	...	...
46	...	...	...	...
47	...	...	...	...
48	...	...	...	...
49	...	...	...	...
50	...	...	...	...

**Bill of Materials**

NO.	DESCRIPTION	UNIT	QUANTITY	REMARKS
1	...	...	...	...
2	...	...	...	...
3	...	...	...	...
4	...	...	...	...
5	...	...	...	...
6	...	...	...	...
7	...	...	...	...
8	...	...	...	...
9	...	...	...	...
10	...	...	...	...
11	...	...	...	...
12	...	...	...	...
13	...	...	...	...
14	...	...	...	...
15	...	...	...	...
16	...	...	...	...
17	...	...	...	...
18	...	...	...	...
19	...	...	...	...
20	...	...	...	...
21	...	...	...	...
22	...	...	...	...
23	...	...	...	...
24	...	...	...	...
25	...	...	...	...
26	...	...	...	...
27	...	...	...	...
28	...	...	...	...
29	...	...	...	...
30	...	...	...	...
31	...	...	...	...
32	...	...	...	...
33	...	...	...	...
34	...	...	...	...
35	...	...	...	...
36	...	...	...	...
37	...	...	...	...
38	...	...	...	...
39	...	...	...	...
40	...	...	...	...
41	...	...	...	...
42	...	...	...	...
43	...	...	...	...
44	...	...	...	...
45	...	...	...	...
46	...	...	...	...
47	...	...	...	...
48	...	...	...	...
49	...	...	...	...
50	...	...	...	...