

FOUNDATION DETAILS (ISOLATED R.C.C FOOTING)















FRONT VIEW



LEFT SIDE ELEVATION



SECTION X-X



SECTION Y-Y

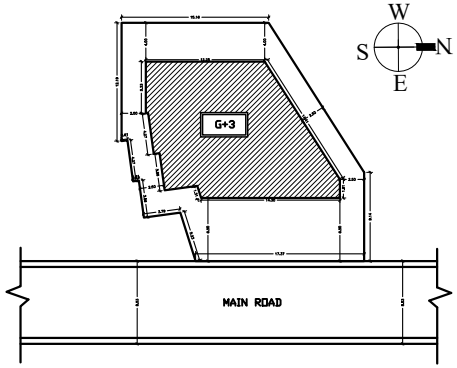



SPACE FOR R.M.C SEAL

SPECIFICATIONS

1) FOUNDATION - R.C.C. COLUMN STRUCTURE
2) WALLS - 1st CLASS BRICK WORK IN RED BRICK IN CEMENT MORTAR 1:6
3) ALL COLUMN BEAM IN TOR STEEL & M.S.G CEM. CONCRETE
4) FLOORING - 1" I.P.S. 1:2:4 OVER FLAT BRICK SOLING AND MOSAIC AS PER REQUIREMENT.
5) R.C.C. ROOF SLAB 100 MM THK IN M 20
6) STAIR WAIST SLAB 4" THK, STEPS 300 X 150.
7) CHHAJJA 3" THK 0.54 WIDE IN R.C.C. 1:2:4.
8) PLASTER 1/2" THK 1:6 INSIDE & 1:6 OUTSIDE CEILING 1/4" THK IN 1:4
9) WOOD WORK 1 1/2 THK FLUSH DOORS. WINDOWS IN STEEL GLAZED AS PER DESIGN

DOOR/ WINDOW SCHEDULE

S.No	Type	Width	Height	Lintel	Description

AS MENTIONED

SH.NO. 1/1

SIGNATURE OF ARCHITECT

SIGNATURE OF OWNER