


Project Title :PROPSD GROUND FLOOR RESIDENTIAL BUILDING OF SMT SUGANDHI DEVI SITUATED AT NAGWA, P.S:- GARHWA

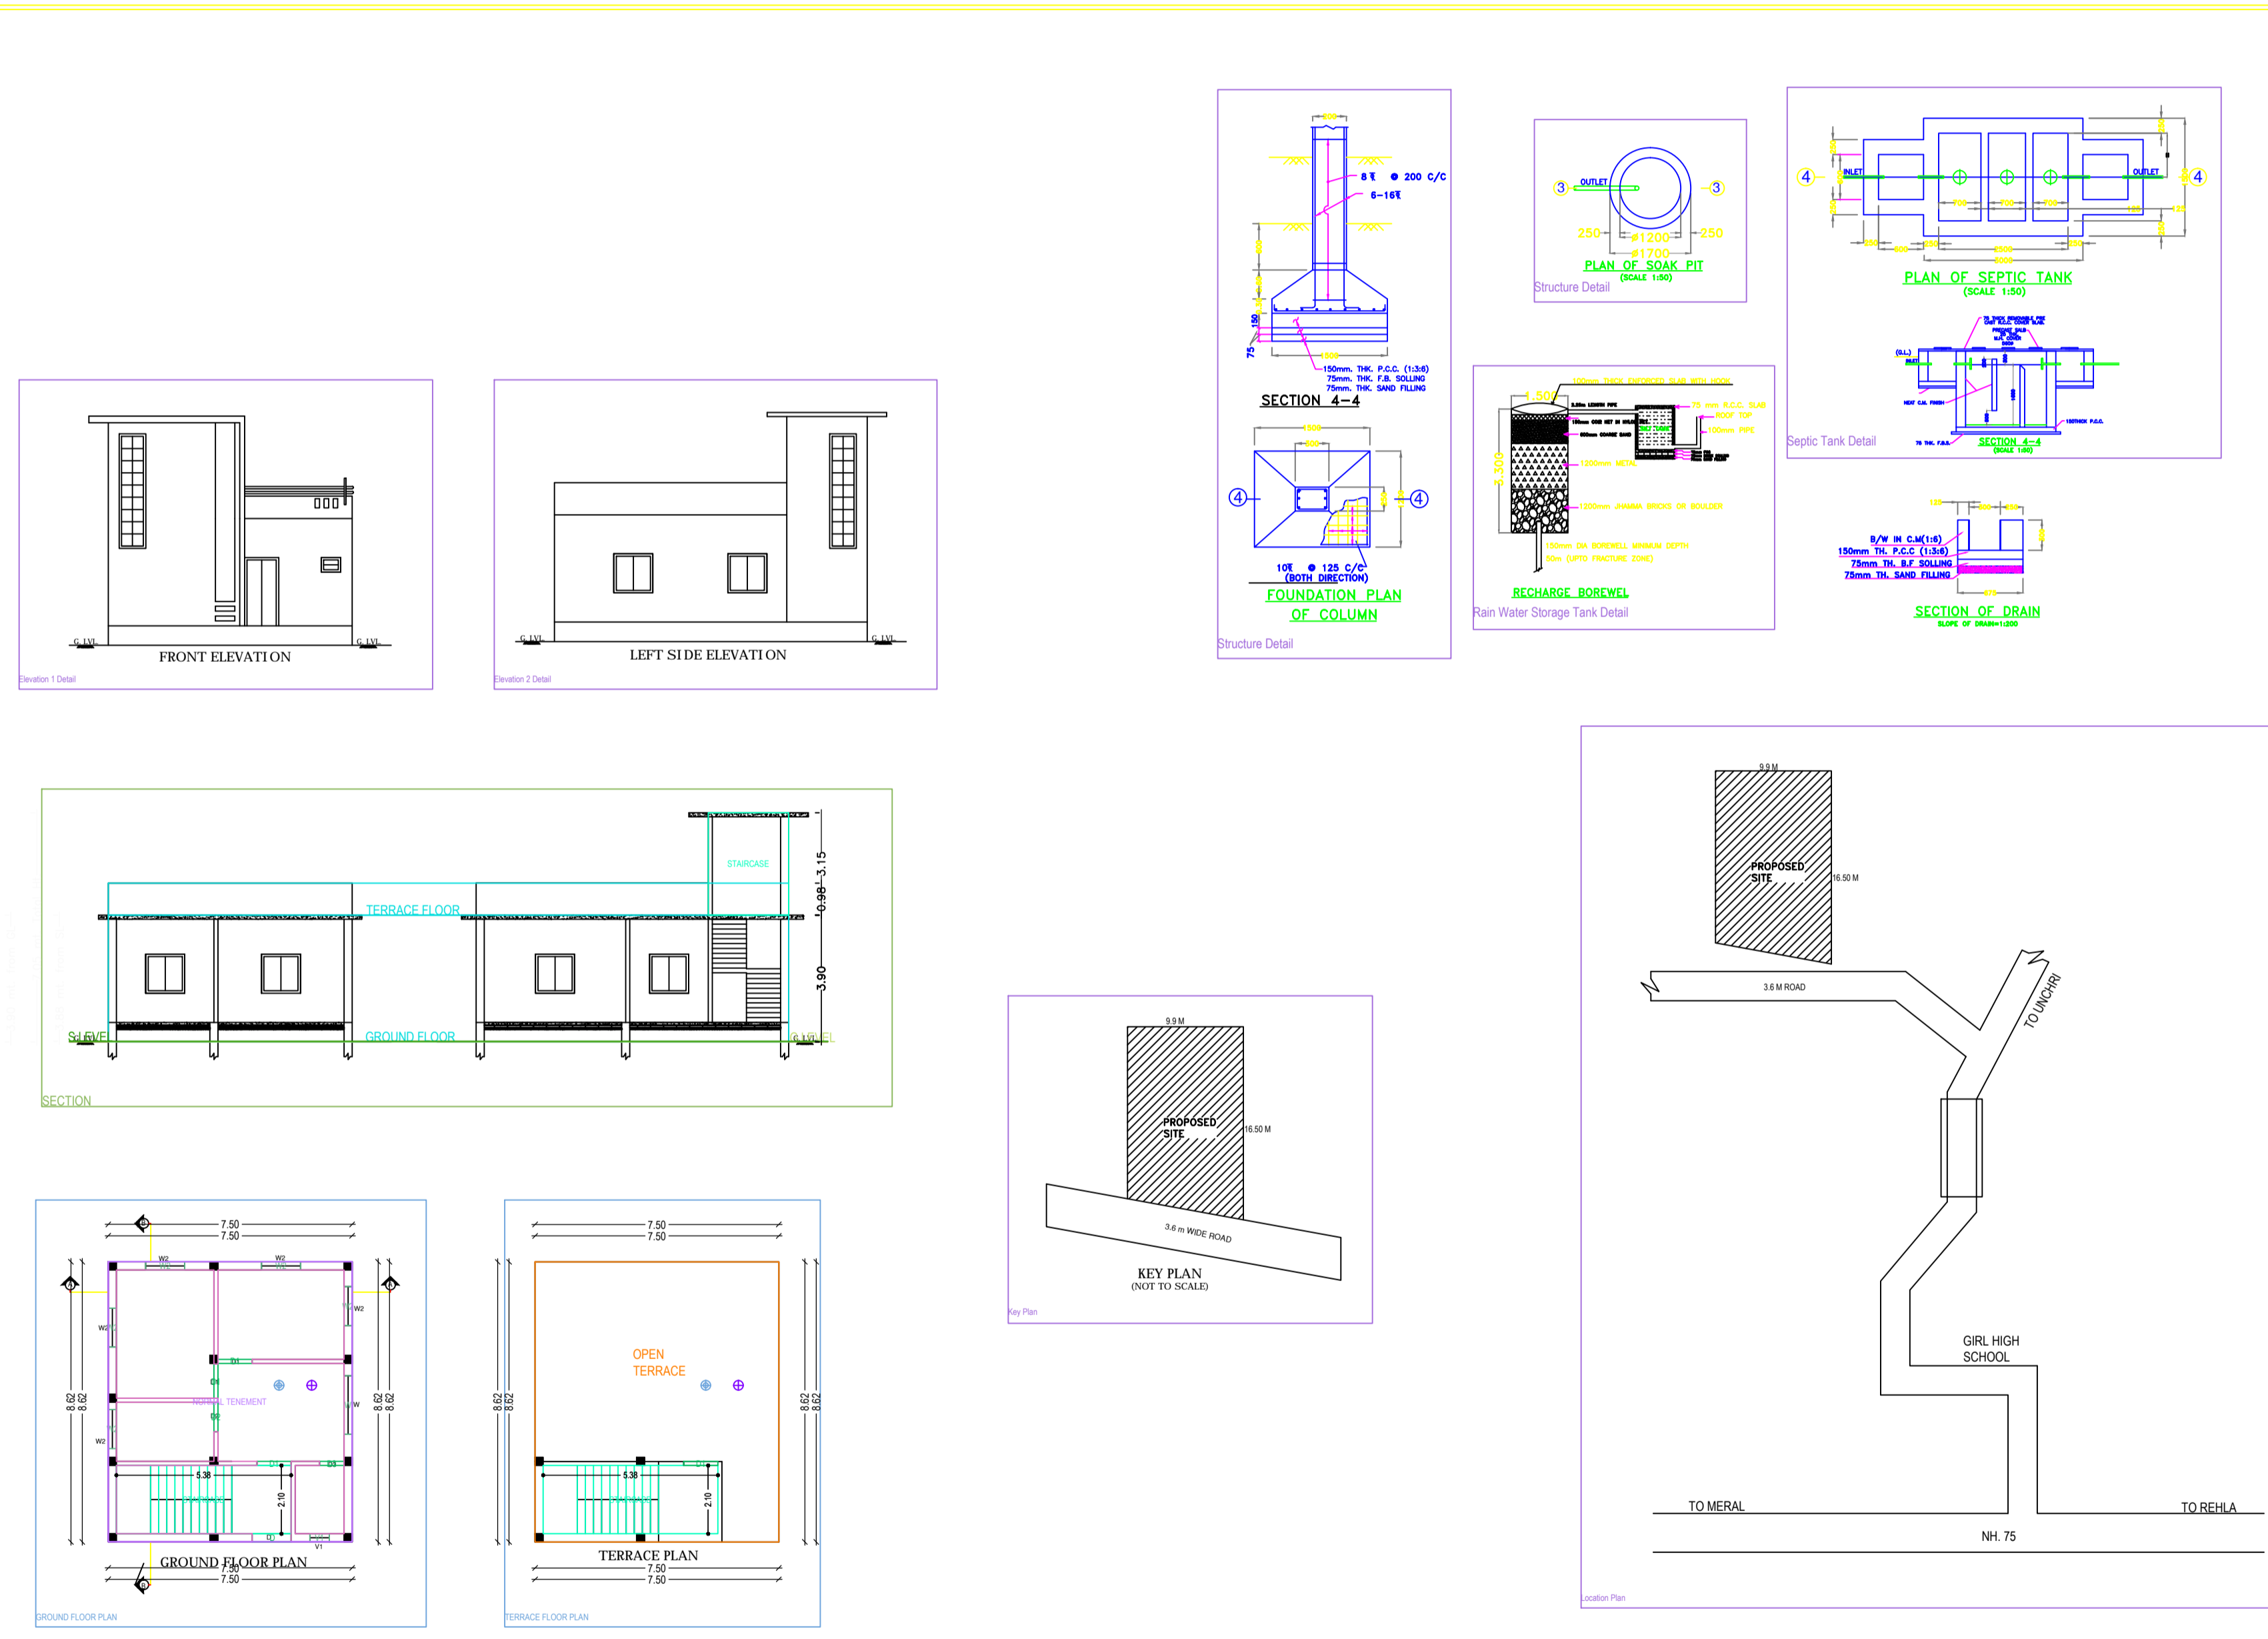

### SCHEDULE OF OPENING

SL.NO.	ITEMS	TYPE	WIDTH	HIGHT	SILL LVL	DISCRPTION
1.	DOOR	D	1050	2100	NIL	SINGLE SHUTTER FLUSH DOOR
		D1	975	2100	NIL	SINGLE SHUTTER FLUSH DOOR
		D2	900	2100	NIL	SINGLE SHUTTER FLUSH DOOR
		D3	750	2100	NIL	SINGLE SHUTTER FLUSH DOOR
2.	WINDOW	W1	1500	1200	900	GLAZED WINDOW LEAF
		W2	1200	1200	900	GLAZED WINDOW LEAF
		W3	900	1200	900	GLAZED WINDOW LEAF
		V	600	600	1500	VENTILATOR

- ### SPECIFICATIONS
- FOUNDATION : SHOWN AS PER FOUNDATION DETAILS.
  - FLOOR : 25THK. FLOOR FINISH OVER 75THK. P.C.C.
  - D.P.C. : 25THK. D.P.C. AT PLINTH LEVEL IN C.M. MORTAR.
  - LINTEL : 150THK. D.P.C. AT PLINTH LEVEL IN C.M. 1:2:4
  - ROOF : 100 THK. R.C.C. ROOF SLAB IN C.M. 1:2:4
  - SUPER STRUCTURE : 250THK. OF 1:2:3THK. 1ST CLASS BRICK WORK IN C.M. MORTAR 1:4.
  - PLASTER : 12M THK. CEMENT INTERNAL EXTERNAL.
  - WOOD WORK : SAI WOOD CHAUKAT & EXTERNAL.
  - SEPTIC TANK : SEPTIC TANK WILL BE FLUSHING SYSTEM.
  - REINFORCEMENT : ALL REINFORCEMENT SHALL B OF TOR STEEL OF GRADE FY-415.
  - FINISHING : 2 COATS OF WHITE WASH/SOCCEM WASH.






### AREA CALCULATION

PLOT AREA AS PER DEED	-	.SQM
PLOT AREA AS PER SITE	-	.SQM
ROAD WIDENING AREA	-	.SQM
PLOT AREA AFTER R.W.	-	.SQM
GROUND FLOOR AREA	-	.SQM
TOTAL BUILT UP AREA	-	.SQM
% OF GROUND COVER AREA	-	
TOTAL FAR ACHIEVED	-	

PROPOSED RESIDENTIAL BUILDING PLAN OF SMT SUGANDHI DEVI W/O SHRI JAGNATH MANJHI PLOT NO.- 46, KHATA NO.-33, AT:- NAGWA, P.S:- GARHWA, DIST. - GARHWA, STATE -- JHARKHAND.

NOTE:- ALL THE DIMENSIONS ARE IN METER.

SIGNATURE OF APPLICANT SIGNATURE OF LIC. ENGINEER

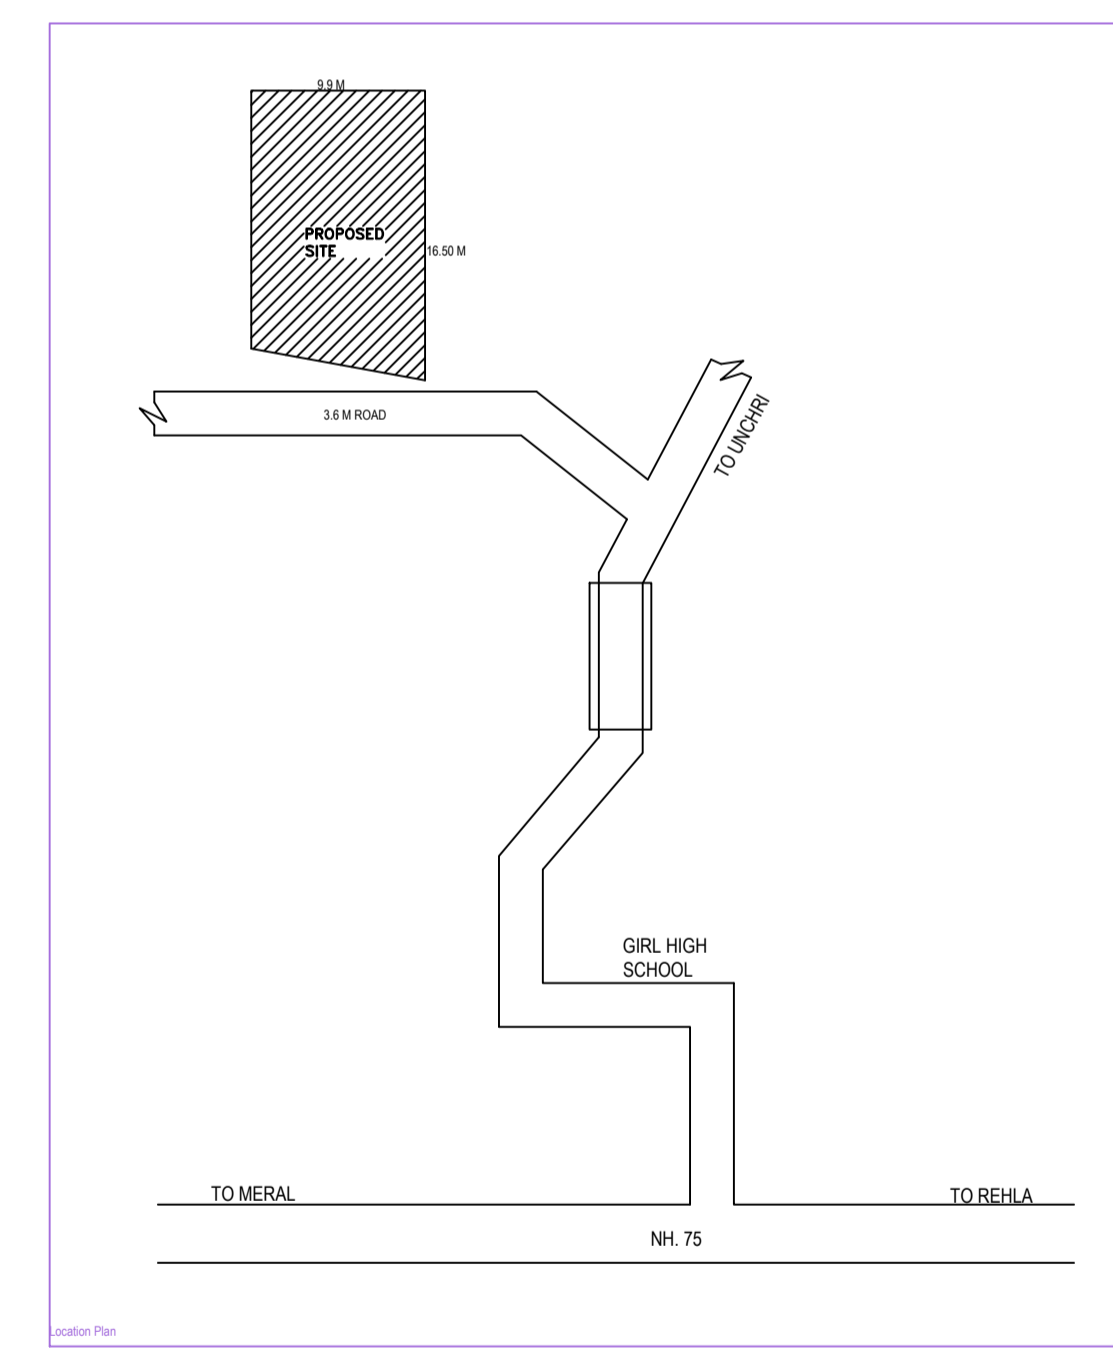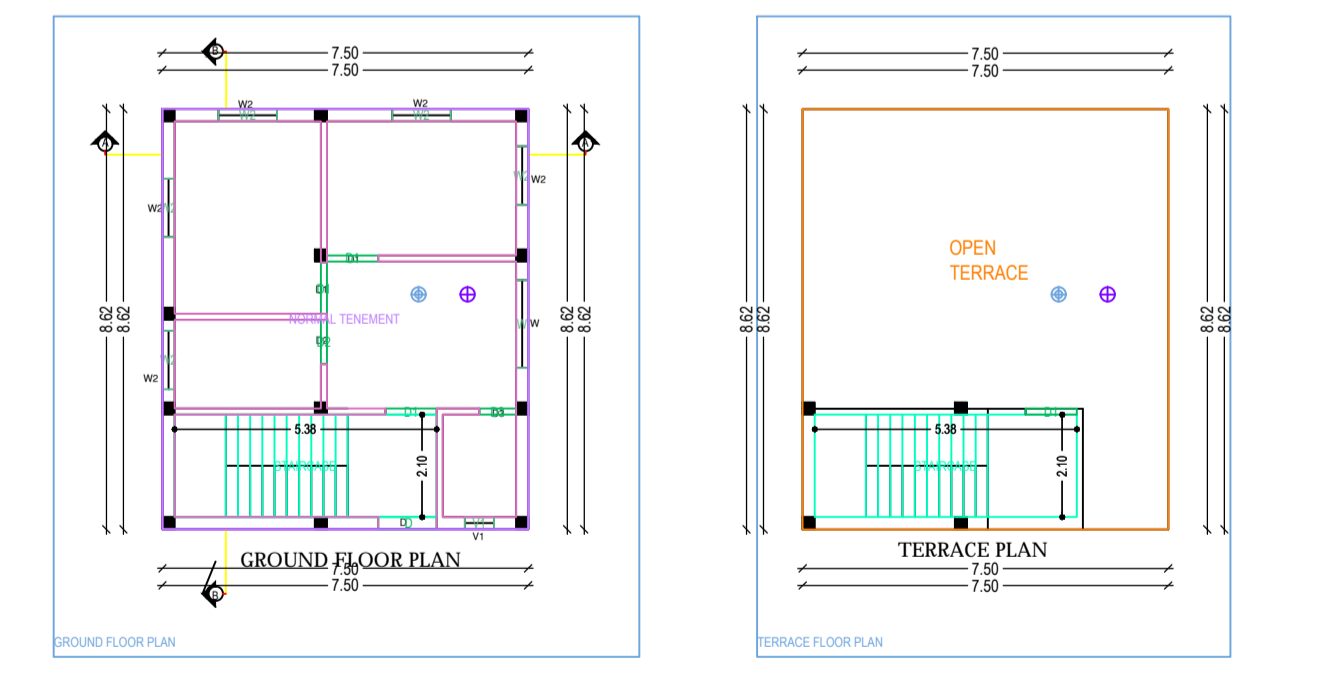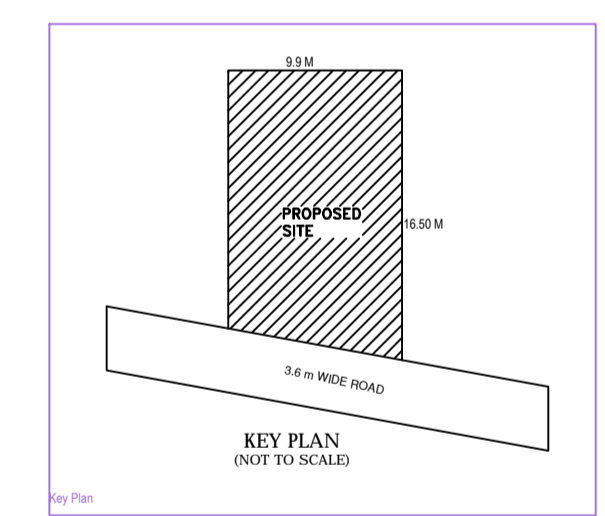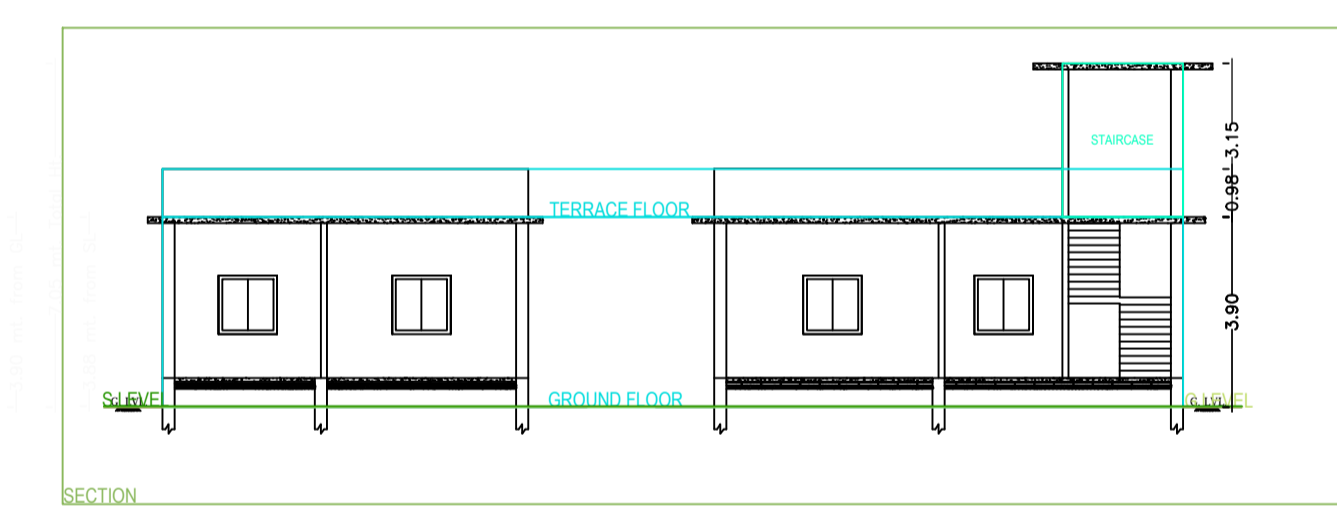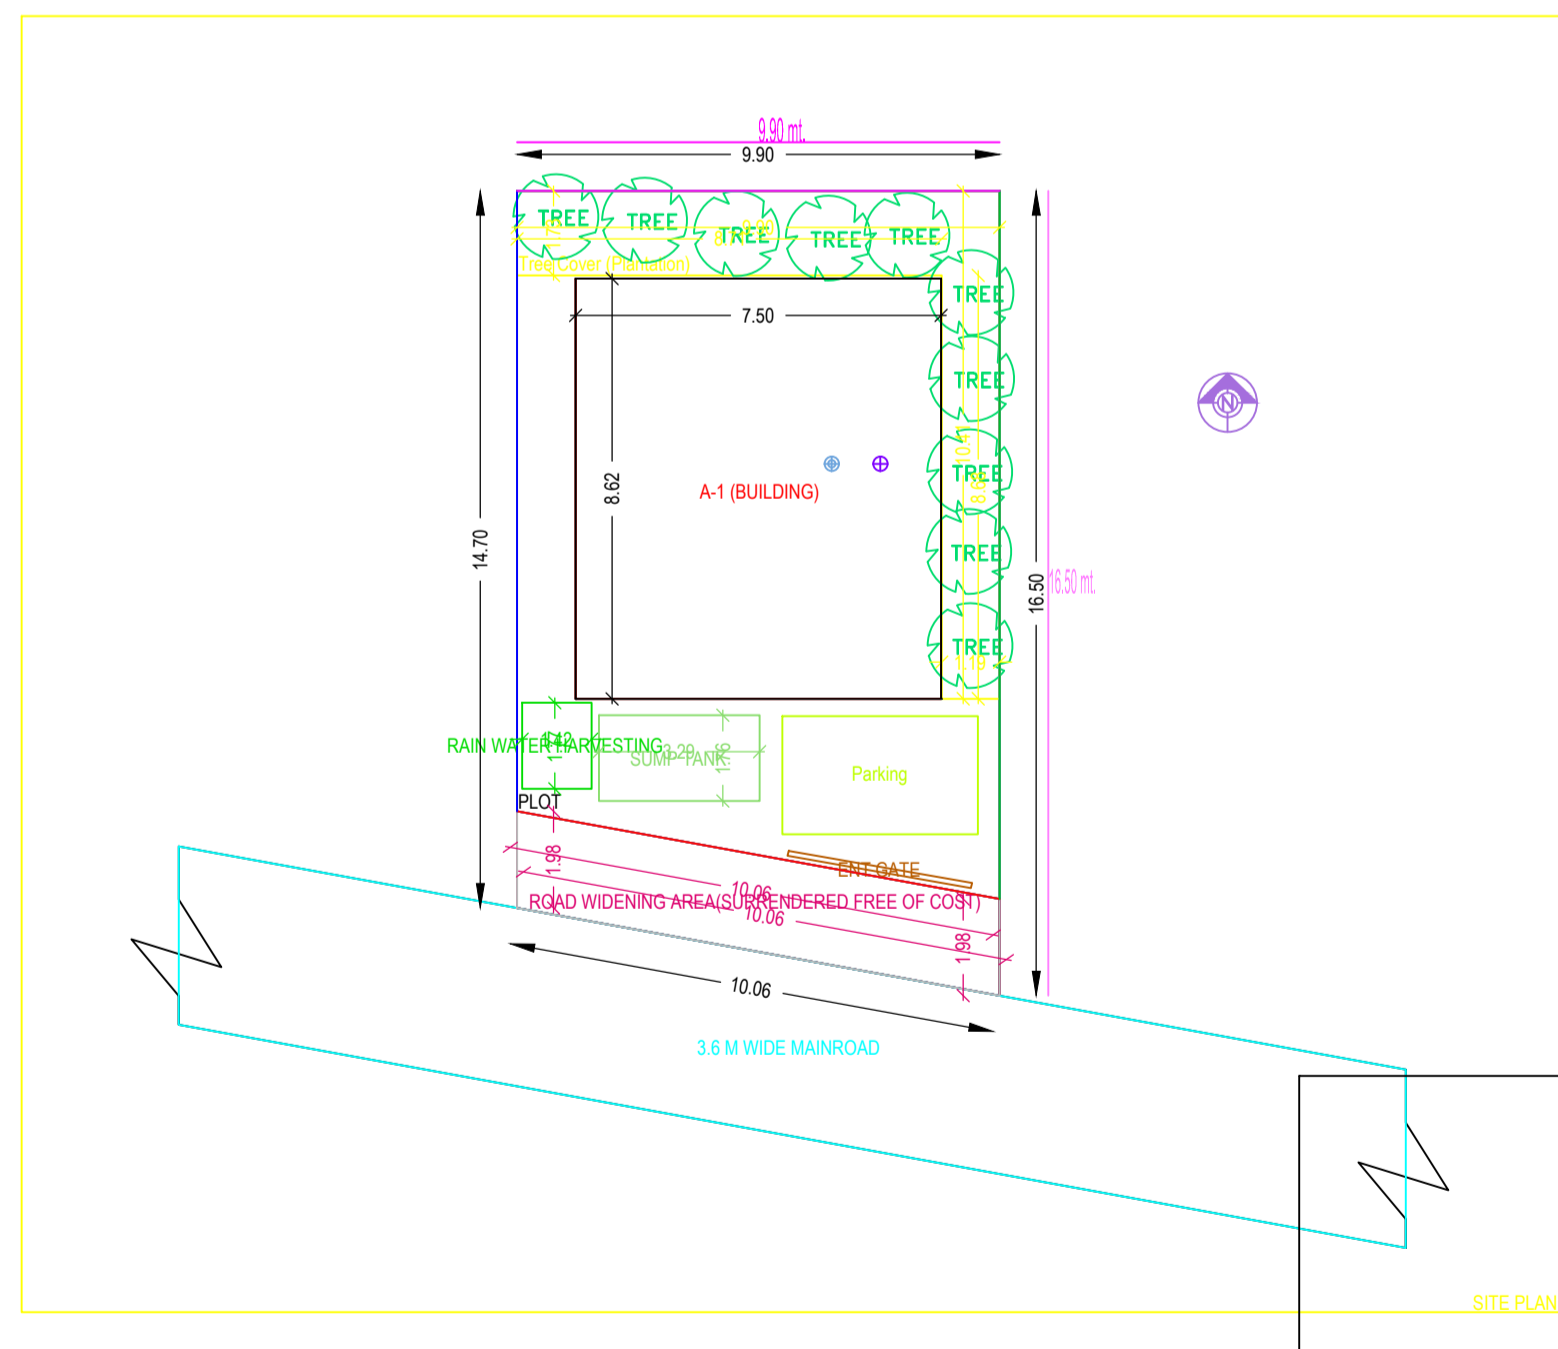

Building A (BUILDING)

Floor Name	Total Built Up Area (Sq.m)	Proposed FAR Area (Sq.m)	Total FAR Area (Sq.m)	Terrt (No.)