
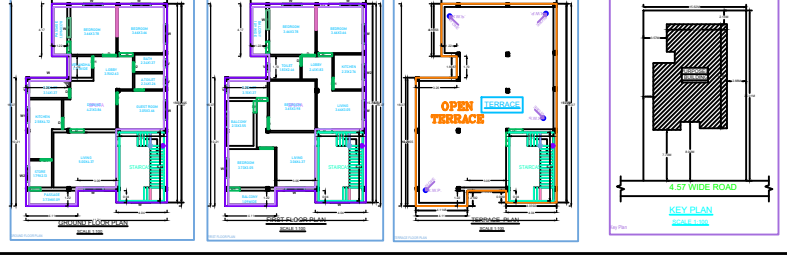



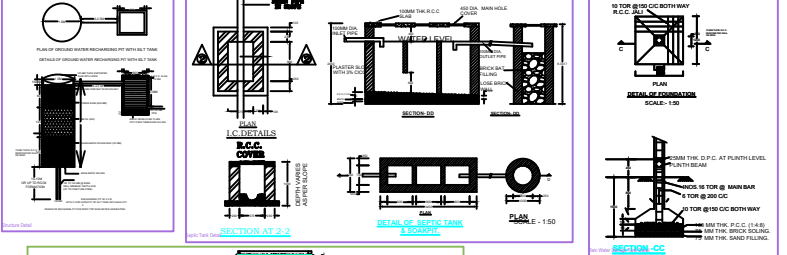


Project Title FRANCISCA SORENG

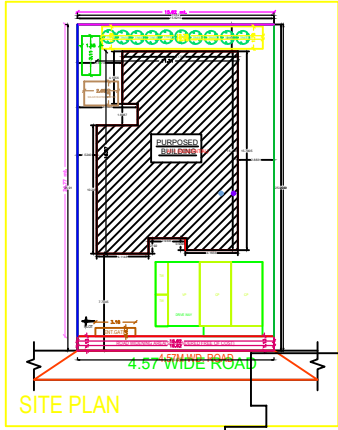

### SPECIFICATIONS

- BRICKWORK IN FOUNDATION & PLINTH SHALL BE OF FIRST CLASS BRICK IN CEMENT MORTAR 1:4 AND HALF BRICK SHALL BE 1:4 CEMENT MORTAR.
- MASONRY FOUNDATION WITH ISOLATED R.C.C COLUMN SHALL BE PROVIDED.
- CURTAIN GLAZING/ STRUCTURAL GLAZING OF GOOD QUALITY AND MARK VENTILATOR SYSTEM SHALL BE USED.
- ROLLING SHUTTER SHALL BE USED FOR SHOP ROOPENINGS.
- GLAZING UNFINISHED ALUMINIUM ANGLE SECOND OR WINDOW AND R.C.C WITH CEMENT MORTAR 1:4.
- ALL R.C.C WORKS SHALL BE DONE IN 12.4 MAX CONCRETE.
- TOTAL TMT STEEL BARS SHALL BE USED IN R.C.C STRUCTURES COMMERCIAL QUALITY.
- ALL MASONRY SURFACE SHALL BE PLASTERED WITH CEMENT MORTAR 1:8 OVER R.C.C SLAB / P.C.C.
- ALL STEEL AND WOOD WORK SHALL BE PAINTED WITH SYNTHETIC PAINT.
- ALL SANITARY AND ELECTRICAL FITTINGS SHALL BE OF STANDARD MARK AND WORKMANSHIP.
- KOTTA STONE / MOSAIC FLOORING INCLUDING STAIRCASE SHALL BE USED.

SCHEDULE OF OPENINGS		
SL.NO.	SIZE	DESCRIPTION
1.	D 1.59X2.13	Sal wood chajhat & Gambhar wood shutter
2.	D1 0.91X2.13	Sal wood chajhat & Gambhar wood shutter
3.	D2 0.79X2.13	Sal wood chajhat & Gambhar wood shutter
4.	W1 1.52X1.22	Fully glazed window
5.	W2 1.22X1.22	Fully glazed window
7.	V 0.61X0.61	CELLING VANTILATOR
7.	V1 1.22X3.96	Fully glazed ventilator
8.	C/G 1.22X2.13	CHANNEL GATE

SCHEDULE OF AREA	
1. TOTAL PLOT AREA AS PER SITE	: 404.71 SQM
2. PROPOSED AREA AT GROUND FLOOR	: 161.30 SQM
3. PROPOSED AREA AT FIRST FLOOR	: 161.30 SQM
3. TOTAL BUILD UP AREA	: 322.60 SQM
4. COVERED AREA	: 161.30X100
	= 404.71
	= 39.85%

**PROPOSED RESIDENTIAL BUILDING FOR SRI- FRANCISCA SORENG**  
C/O - BENJAMIN KERKETTA  
KHATA NO-256, PLOT NO-5206  
RAKWA - 10 DECIMAL.  
THANA NO - 80  
MOHALLA - DEPTI TOLI  
MAUZA - GOTRA  
DISTT. - SIMDEGA (JHARKHAND)

**RAJ CONSULTANCY**  
CLUB COMPLEX, GANDBH MADHAN  
MAIN ROAD SIMDEGA, JHARKHAND  
MOBILE - 998111-91475, 995602-2381

SCALE - 1:100	SH.NO.	
AS MENTIONED	1/1	

SIGNATURE OF LIC. ENGINEER SIGNATURE OF OWNER

C/O INQUIRY	
DATE	
NAME	
ADDRESS	
TEL NO.	
REMARKS	

REVISION NO.		DATE	REVISION
01			ISSUED FOR PERMIT

Building A1 (RESIDENTIAL)

SL NO	REVISION	DATE	REVISION
01			ISSUED FOR PERMIT

SCHEDULE OF OPENINGS

SL NO	SIZE	DESCRIPTION
1.	D 1.59X2.13	Sal wood chajhat & Gambhar wood shutter
2.	D1 0.91X2.13	Sal wood chajhat & Gambhar wood shutter
3.	D2 0.79X2.13	Sal wood chajhat & Gambhar wood shutter
4.	W1 1.52X1.22	Fully glazed window
5.	W2 1.22X1.22	Fully glazed window
7.	V 0.61X0.61	CELLING VANTILATOR
7.	V1 1.22X3.96	Fully glazed ventilator
8.	C/G 1.22X2.13	CHANNEL GATE

SCHEDULE OF AREA

SCHEDULE OF AREA	
1. TOTAL PLOT AREA AS PER SITE	: 404.71 SQM
2. PROPOSED AREA AT GROUND FLOOR	: 161.30 SQM
3. PROPOSED AREA AT FIRST FLOOR	: 161.30 SQM
3. TOTAL BUILD UP AREA	: 322.60 SQM
4. COVERED AREA	: 161.30X100
	= 404.71
	= 39.85%

Scale: 1:100 (As per Drawing)