PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Project Title :GAYATRI DEVI SHARMA

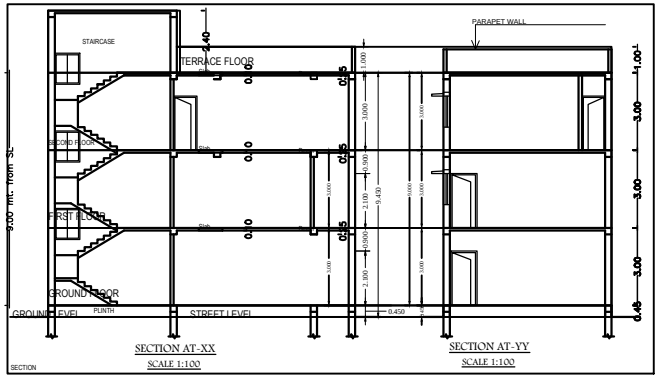

SECTION AT-XX
SCALE 1:100

SECTION AT-YY
SCALE 1:100



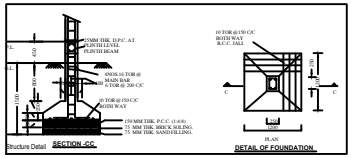





LOCATION PLAN
N.T.S.

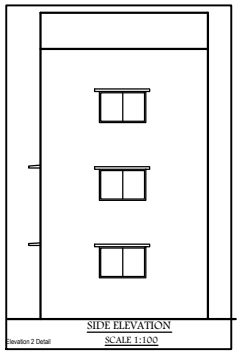

SIDE ELEVATION
SCALE 1:100

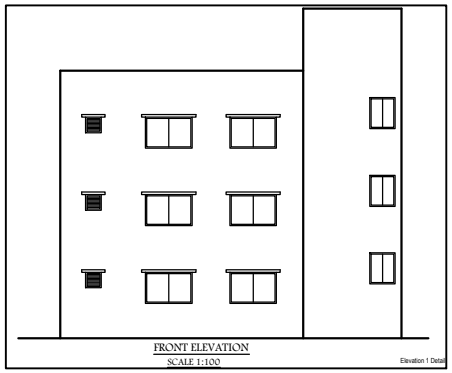

FRONT ELEVATION
SCALE 1:100

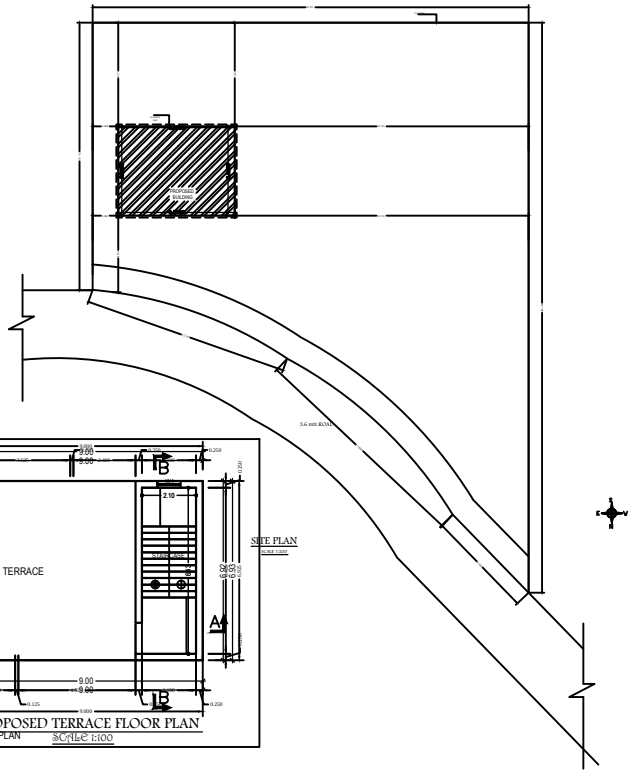

SITE PLAN
SCALE 1:200



PROPOSED GROUND FLOOR PLAN
SCALE 1:100



PROPOSED 1st TO 2nd FLOOR PLAN
SCALE 1:100

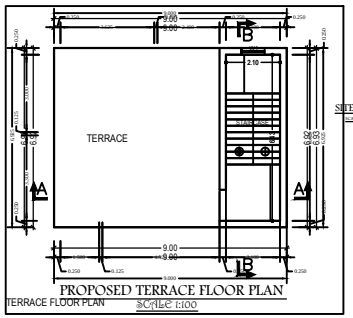

PROPOSED TERRACE FLOOR PLAN
SCALE 1:100

SCHEDULE OF OPENINGS

SL.NO.	TYPE	SIZE	DESCRIPTION
1.	D	0.75X2.10	Sal wood chaukhat & Commercial Ply Shutter
2.	D1	0.90X2.10	Sal wood chaukhat & Commercial Ply Shutter
3.	D2	1.050X2.10	Sal wood chaukhat & Commercial Ply Shutter
4.	V	0.60X0.60	Fully glazzed Al. Sliding window
5.	V1	0.90X0.60	Fully glazzed Al. Sliding window
6.	W	0.1200X0.90	Fully glazzed Al. Sliding window
7.	W1	1.500X1.20	Fully glazzed Al. Sliding window
8.	W2	1.800X1.20	Fully glazzed Al. Sliding window

SPECIFICATION

1. R.C.C.(1:2:4) IN COLUMN FOUNDATION WITH R.C.C. TIE BEAM
2. SUPER STRUCTURE 1ST CLASS BRICK WORK IN C.M (1:6)
3. R.C.C (1:2:4) IN LINTEL CHAJJA, ROOF SLAB, STAIRCASE COLUMN E.T.C. AS PER DESIGN ENGINEER.
4. SAL WOOD CHAUKHAT IN DOORS & ALMUNIUM FRAME IN WINDOWS.
5. 12 MM CEMENT PLASTER IN C.M.(1:4) INSIDE & OUTSIDE WALL SURFACE.
6. 6MM CEMENT PLASTER IN C.M.(1:4) IN CEILING.
7. DOOR SHUTTER- COMMERCIAL PLY FLUSH DOOR SHUTTER.
8. WINDOW SHUTTER ALMUNIUM GLAZZED SLIDING PANNEL.
9. CERAMICS TILES FLOORING IN ALL ROOMS .
10. SNOWCEM FINISHING IN ALL ROOMS & OUT SIDE WALL.

AREA CALCULATION (in sqmt.)

PROPOSED RESIDENTIAL BUILDING FOR
SRI. GAYATRI DEVI SHARMA S/O LATE
BAJRANGI SHARMA ON
R.S.PLOT -628,KHATA NO.- 34 ,THANA : GUMLA,
THANA N:-47, VILL:-GUMLA,
GUMLA,(JHARKHAND)

SIGNATURE OF APPLICANT'S :-

SIGNATURE OF ARCHITECT :-

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT