ION SCHEDULE

	SIZE	REINFORCEMENT
TO F_8	900×900	10ϕ @ 150 c/c BOTH WAY
TO F_{13}	1050×1050	DO

OLUMN SCHEDULE

	SIZE	REINFORCEMEN	BINDERS
TO C_8	250×250	4-12ϕ	6ϕ@150 c/c.
TO C_{13}	250×250	4-16ϕ	DO.

BEAM SCHEDULE

BEAM MKD.	SIZE	SPAN TOP	BOTTOM	SUPPORT (LEFT) TOP	SUPPORT (LEFT) BOTTOM	SUPPORT (RIGHT) TOP & BOTTOM.	BINDER
B_1	250×250.	2-10ϕ	2-12ϕ.	2-10ϕ	2-12ϕ	2-10ϕ 2-12ϕ	6ϕ@150 c/c
B_2	250×400	2-12ϕ	2-12ϕ 1-16ϕ	2-12ϕ 1-16ϕ	2-12ϕ	2-12ϕ 1-16ϕ 2-12ϕ	DO.
B_3	250×300	2-12ϕ	2-12ϕ 1-16ϕ	2-12ϕ 1-16ϕ	2-12ϕ	2-12ϕ 1-16ϕ 2-12ϕ	DO.

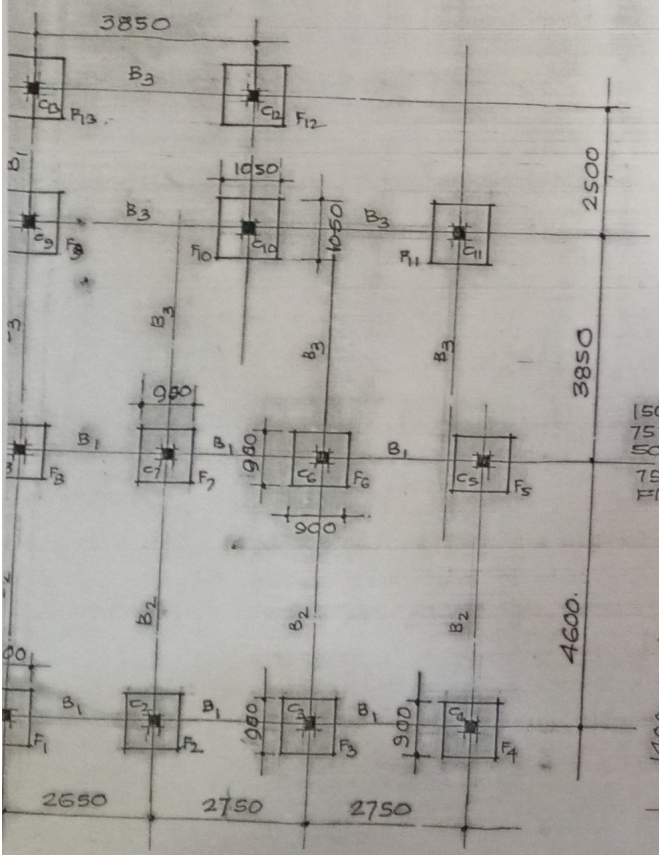

FOUNDATION AND BEAM PLAN

KEY PLAN.
NOT IN SCALE.

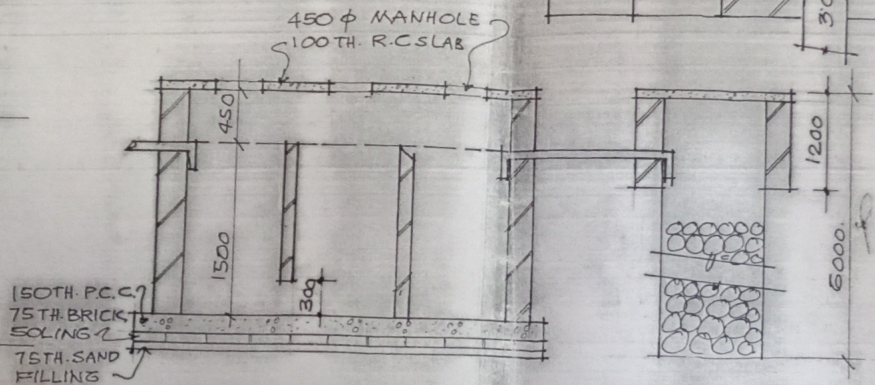

SECTION OF SEPTIK TANK & SOAK PIT.

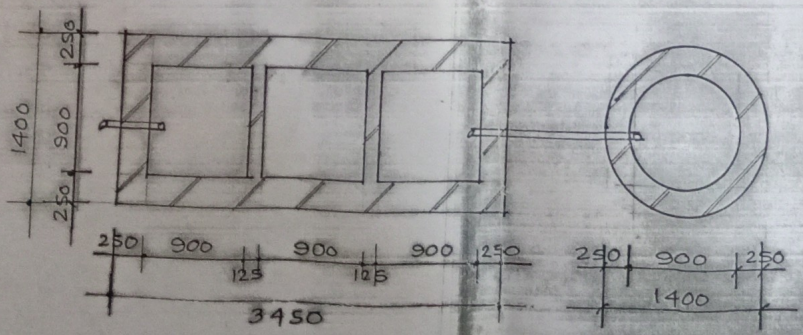

PLAN OF SEPTIK TANK & SOAK PIT.
SCALE 1:50.

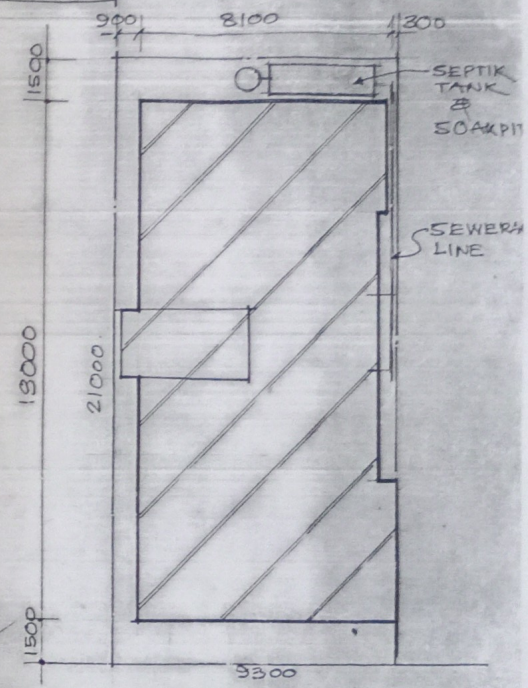

J.E.
LOHARDAGA MUNICIPALITY

SITE PLAN
SCALE 1:200

Anup Kumar. Binod Kumar Sahu Pramod Kumar Sahu Arup Kumar Sahu Manoj Kumar Sahu

SIG. OF OWNER

SIG. OF L.B.S.

PROPOSED SHOP-CUM RESIDENTIAL BUILDING OF SHRI ANUP KUMAR, SHRI ARUP KUMAR SAHU, SHRI MANOJ KUMAR SAHU, SHRI BINOD KUMAR SAHU, SHRI PRAMOD KUMAR SAHU AT PLOT NO. 1231, KHATA NO. 136, VILLAGE KUTMU, THANA LOHARDAGA, THANA NO. 141, DISTRICT LOHARDAGA, BIHAR.