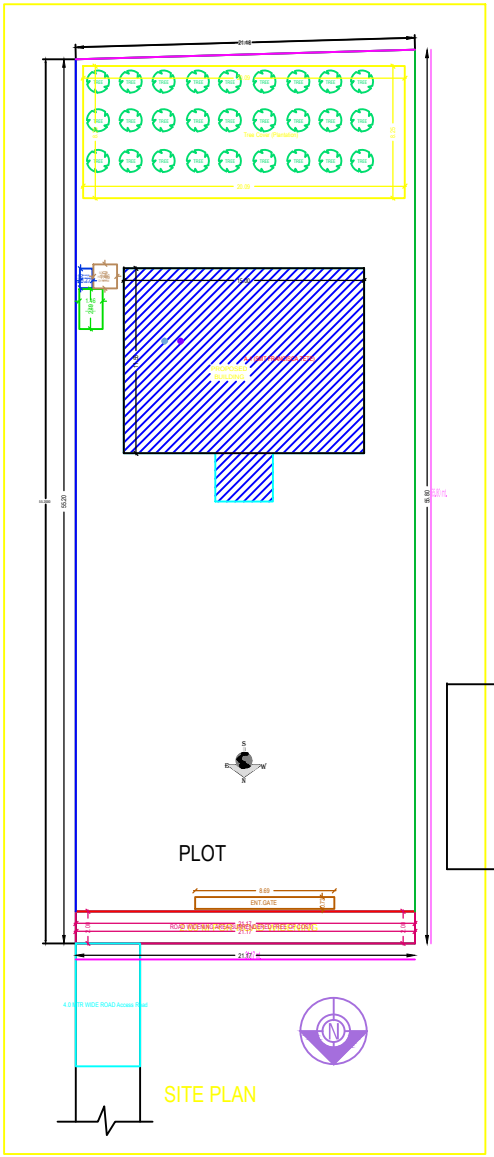

Project Title :SMT FRANCISCA TETE

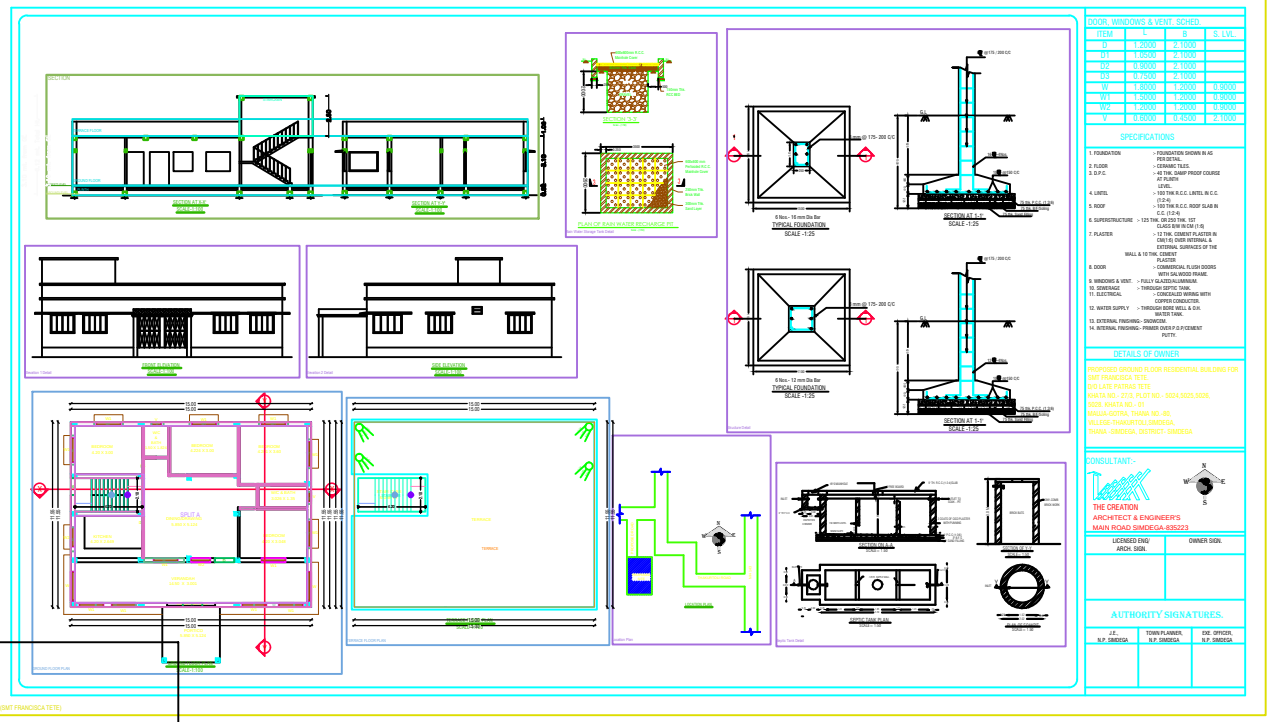

DOOR, WINDOWS & VENT. SCHED.			
ITEM	L	B	S. LVL.
D	1.0000	2.1000	
D1	1.0000	2.1000	
D2	0.9000	2.1000	
D3	0.7500	2.1000	
W	1.5000	1.2000	0.9000
W1	1.5000	1.2000	0.9000
W2	1.2000	1.2000	0.9000
V	0.6000	0.4500	2.1000

SPECIFICATIONS

1. FOUNDATION : FOUNDATION SHOWN IN AS PER DETAIL.
2. FLOOR : CERAMIC TILES.
3. D.P.C. : 40 THK. DAMP PROOF COURSE AT PLINTH LEVEL.
4. LINTEL : 100 THK R.C.C. LINTEL IN C.C. (1:2:4).
5. ROOF : 125 THK R.C.C. ROOF SLAB IN C.C. (1:2:4).
6. SUPERSTRUCTURE : 125 THK. OR 250 THK. 1ST CLASS BRK IN CM (1:6).
7. PLASTER : 12 THK. CEMENT PLASTER IN CM(1:6) OVER INTERNAL & EXTERNAL SURFACES OF THE WALL & 10 THK. CEMENT PLASTER
8. DOOR : COMMERCIAL PLUSH DOORS WITH SAL WOOD FRAME.
9. WINDOWS & VENT. : FULLY GLAZED ALUMINIUM.
10. SEWERAGE : THROUGH SEPTIC TANK.
11. ELECTRICAL : CONCEALED WIRING WITH COPPER CONDUCTOR.
12. WATER SUPPLY : THROUGH BORE WELL & O.H. WATER TANK.
13. EXTERNAL FINISHING:- SNOWCEM.
14. INTERNAL FINISHING:- PRIMER OVER P.O.P./CEMENT PUTTY.

DETAILS OF OWNER

PROPOSED GROUND FLOOR RESIDENTIAL BUILDING FOR SMT FRANCISCA TETE.
PLOT LATE PATRAS TETE
KHATA NO.- 273/5, PLOT NO.- 3024,3025,3026, 3028, KHATA NO.- 01
MAUJA-SOTRA, THANA NO.-80,
VILLAGE-THAKURTOLI SIMDEGA
THANA -SIMDEGA, DISTRICT- SIMDEGA

CONSULTANT:-

THE CREATION
ARCHITECT & ENGINEER'S
MAIN ROAD SIMDEGA-835223

LICENSED ENG/ ARCH. SIGN.	OWNER SIGN.

AUTHORITY SIGNATURES.

J.E. N.P. SIMDEGA	TOWN PLANNER N.P. SIMDEGA	EXE. OFFICER N.P. SIMDEGA

Building A (SMT FRANCISCA TETE)

Floor Name	Total Built Up Area (Sq.mt.)	Proposed FAR Area (Sq.mt.) Dwelling Units	Total FAR Area (Sq.mt.)	Tenat (No.)
GROUND FLOOR	173.25	173.25	173.25	01
TERRACE FLOOR	4.00	4.00	4.00	00
Total	173.25	173.25	173.25	01
Total Number of Same Buildings	1			
Total	173.25	173.25	173.25	01

SCHEDULE OF JOINERY:

BUILDING NAME	NAME	LENGTH	HEIGHT	NOS
A-SMT FRANCISCA TETE)	D2	0.75	2.13	02
A-SMT FRANCISCA TETE)	D1	0.90	2.13	06
A-SMT FRANCISCA TETE)	D4	1.05	2.13	01
A-SMT FRANCISCA TETE)	D	1.22	2.13	02
Total	-	-	-	11

SCHEDULE OF JOINERY:

BUILDING NAME	NAME	LENGTH	HEIGHT	NOS
A-SMT FRANCISCA TETE)	V	0.76	1.05	02
A-SMT FRANCISCA TETE)	W2	1.50	2.50	01
A-SMT FRANCISCA TETE)	W1	1.80	2.50	06
A-SMT FRANCISCA TETE)	W	2.50	2.50	03
Total	-	-	-	12

UnBUA Table for Building :A (SMT FRANCISCA TETE)

FLOOR	Name	UnBUA Type	UnBUA Area	Carpet Area	No. of Rooms	No. of Tenement
GROUND (GARDEN PLAN)	SPLIT A	FLAT	149.88	146.19	3	1
Total	-	-	149.88	146.19	3	1