PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Project Title :Smt VIDYAPATI DEVI

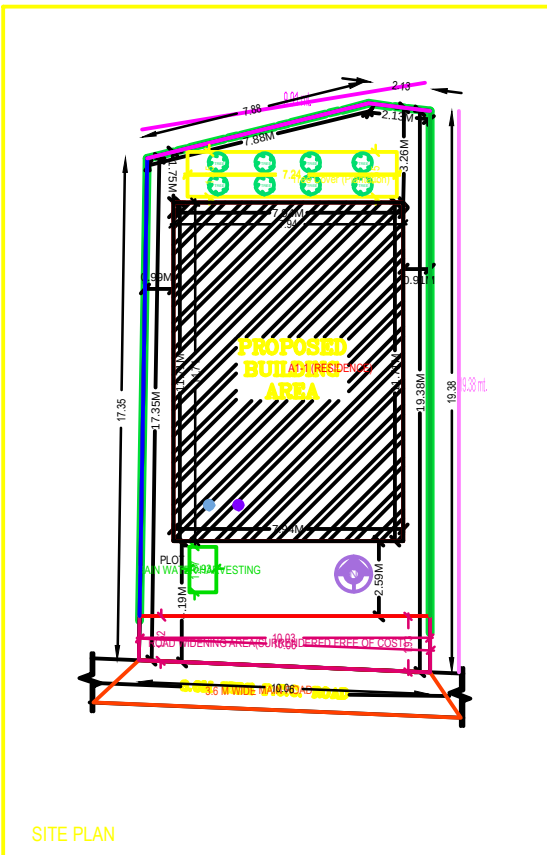

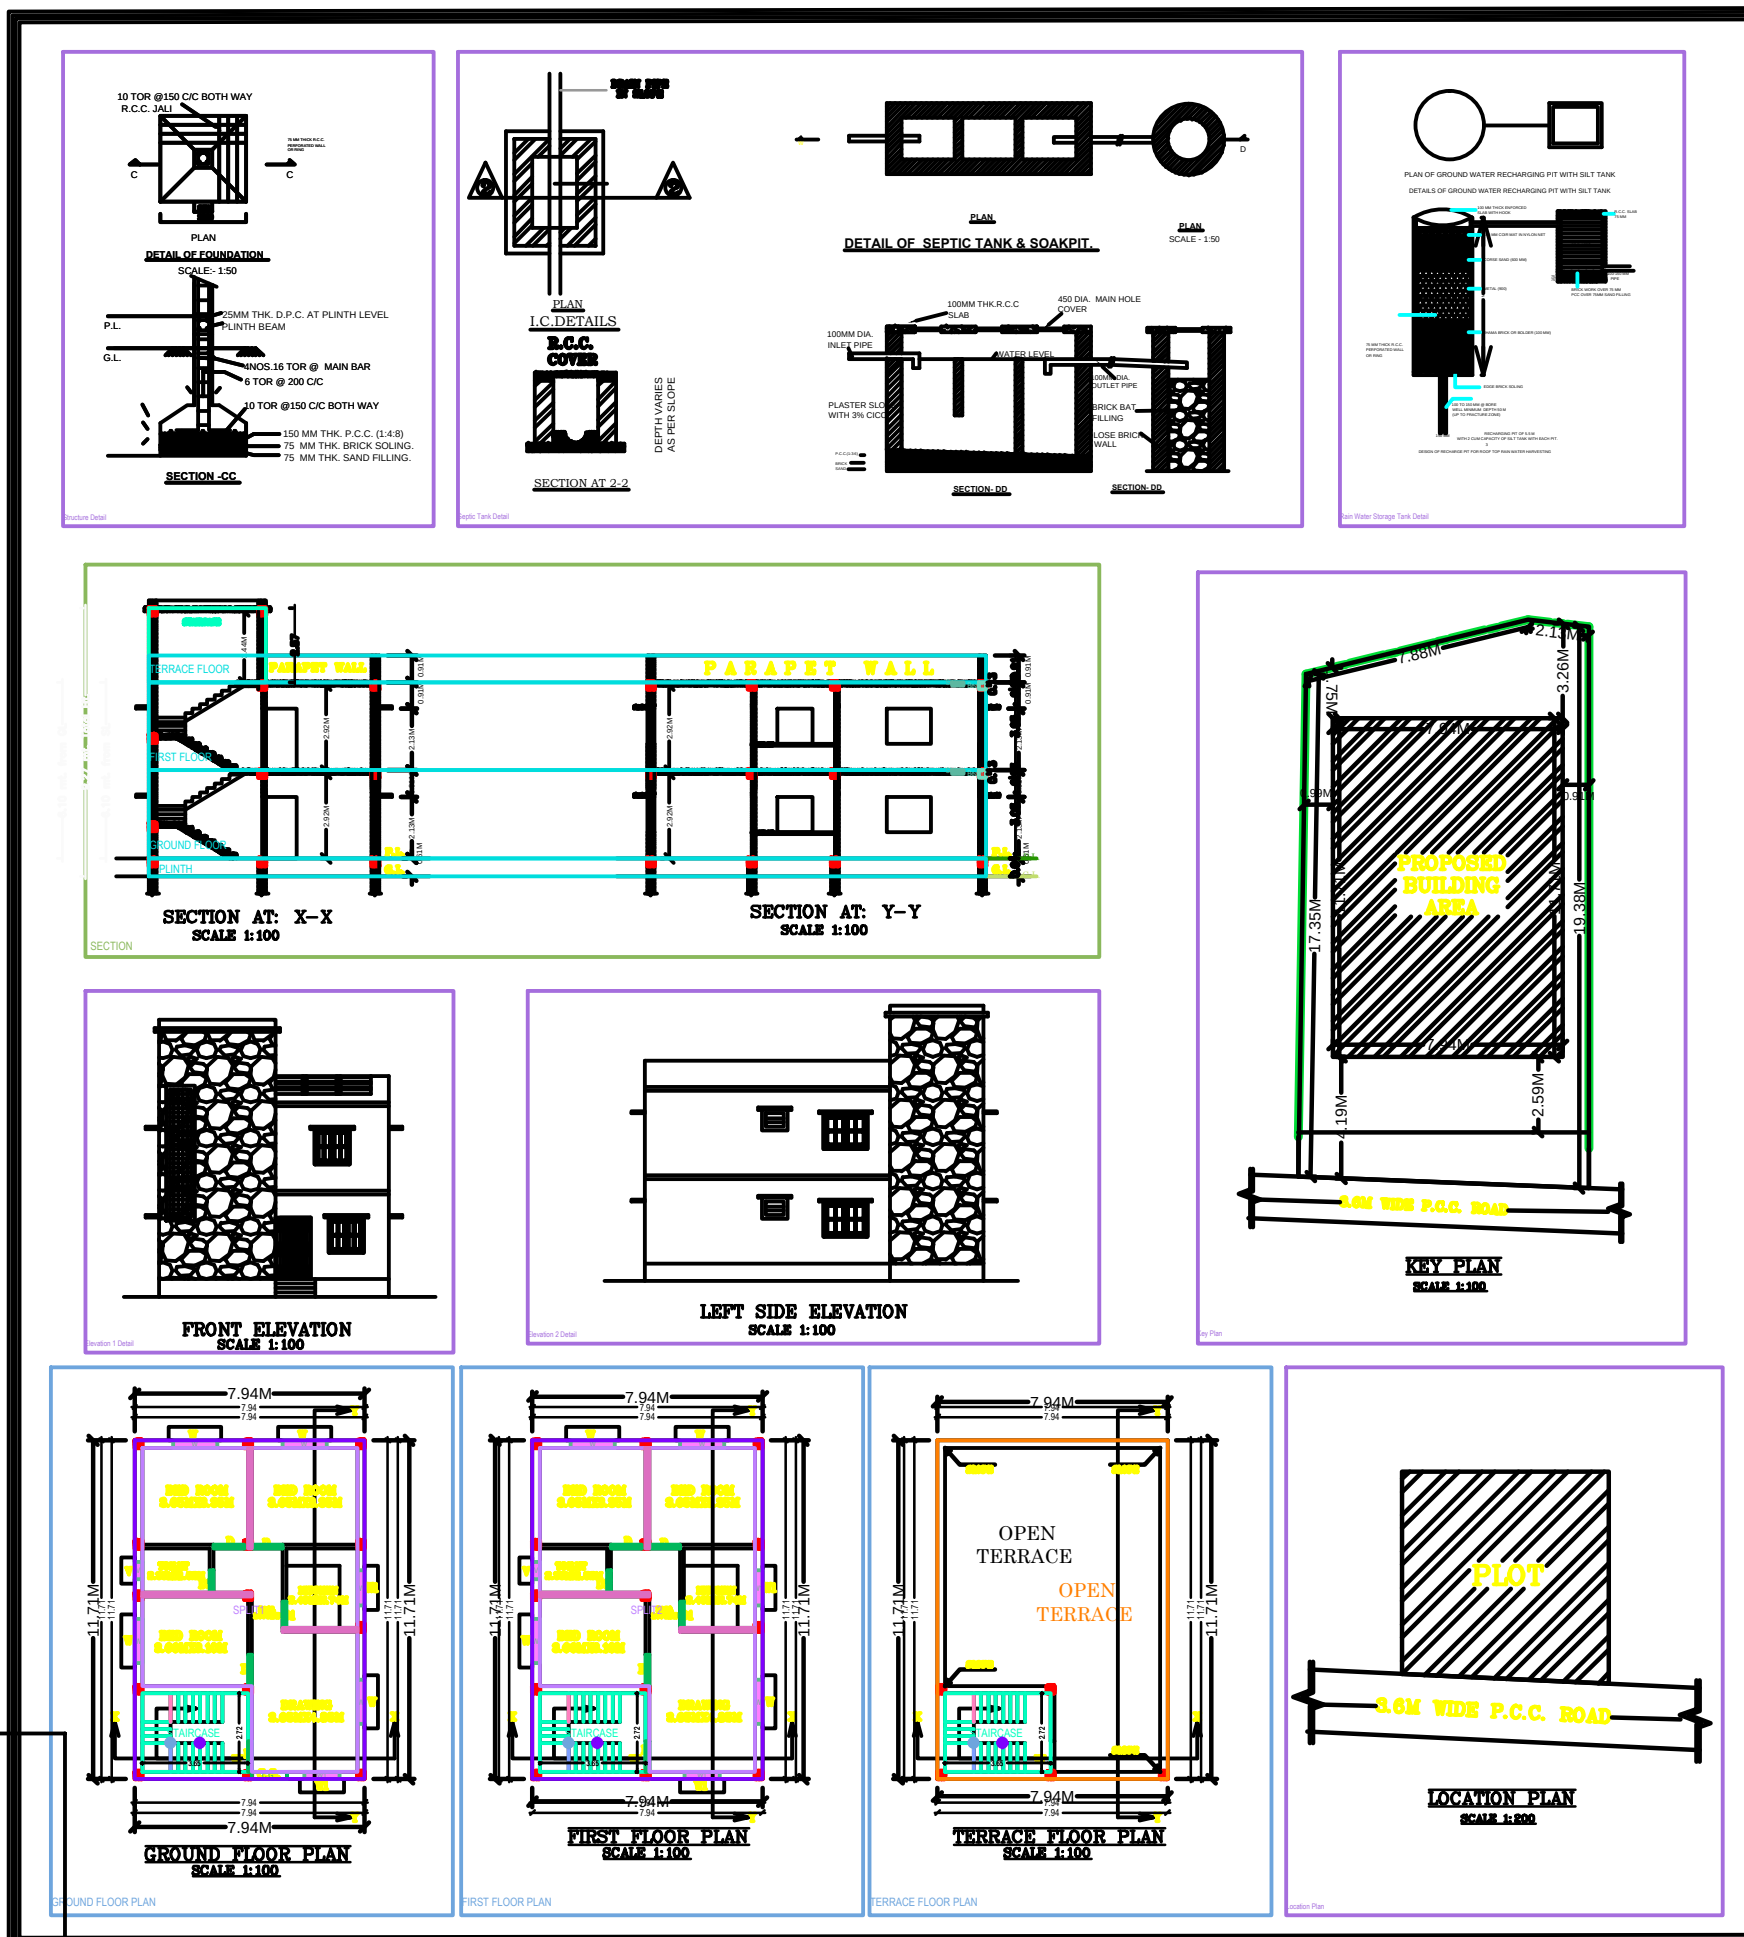

SPECIFICATIONS

1. BRICKWORK IN FOUNDATION & PLINTH SHALL BE OF FIRST CLASS BRICK IN CEMENTMORTAR 1:6 AND HALF BRICK WILL BE 1:4CEMENT MORTAR
2. MASONARY FOUNDATION WITH ISOLATED R.C.C COLUMN SHALL BE PROVIDED
3. CURTAIN GLAZING/ STTUCTURAL GLAZING OF GOOD QUALITY AND MARK VENTILATOR SYSTEM SHALL BE USED
4. ROLLING SHUTTER SHALL BE USED FOR SHOPS OPENINNGS
5. M.S GLAZED/ANODIZED ALUMINIUM/NCL SECCOLOR WINDOW AND R.C.C WITH CEMENT MORTOR 1:4
6. ALL R.C.C WORKS SHALL BE DONE IN 1:2:4 MIX CONCRETE
7. TATA TMT STEEL BARS SHALL BE USED IN R.C.C STRUCTURES COMMERCIAL QUALITY
8. ALL MASONARY SURFACE SHALL BE PLASTERED WITH CEMENT MORTAR 1:6 OVER R.C.C SLAB / P.C.C
9 ALLSTEEL AND WOOD WORK SHALL BE PAINTED WITH SYNTHETICENML.PAINT
10 ALL SANITARY AND ELECTRICAL FITTINGS SHALL BE OF STANDARD MARKAND WORKMENSHIP
11. KOTTA STONE / MOSAIC FLOORING INCLUDING STAIRCASE SALL BE USED

SL.NO. SCHEDULE OF OPENINGS

SI.NO.		SIZE	DESCRIPTION
1.	D	1.05X2.10	Sal wood chaukhat & Gamhar wood shutter
2.	D1	.90X2.10	Sal wood chaukhat & Gamhar wood shutter
3.	D2	.75X2.10	Sal wood chaukhat & Gamhar wood shutter
4.	W	1.50X1.20	Fully glazzed window
5.	W1	1.20X1.20	Fully glazzed window
6.	W2	-------	Fully glazzed window
7.	V	.60X.60	CELLING VANTILOTER
8.	C.G	1.20X2.10	

SCHEDULE OF AREA

1. TOTAL PLOT AREA AS PER SITE : 184.89 Sq.M.
2. PROPOSED AREA AT GROUND FLOOR : 92.98 Sq.M.
3. PROPOSED AREA AT FIRST FLOOR : 92.98 Sq.M.
4. TOTAL BUILD UP AREA : 185.96 Sq.M.
5. COVERED AREA : $\frac{92.98X100}{184.89}$ = 50.28%

PROPOSED RESIDENTIAL BUILDING FOR
Smt -VIDYAPATI DEVI
W/O - BRAJESH SINGH
KHATA NO - 22 , PLOT NO -1610
RAKWA.- 04.56 DISMIL,
THANA NO - 117,
MOHALLA -SALDEGA
MAUZA -SIMDEGA GHOCHOTOLI
DISTT. - SIMDEGA (JHARKHAND)

RAJ ARCHITECT CONSULTANCY
CLUB COMPLEX ,GANDHI MAIDAN
MAIN ROAD SIMDEGA JHARKHAND
MOBILE - 094311-93425,093862-22833

SCALE - 1:100	SH.NO.
AS MENTIONED	1/1

SIGNATURE OF LIC. ENGINEER
NAGAR PARISHAD SIMDEGA

SIGNATURE OF OWNER

A1 (RESIDENCE)

Building :A1 (RESIDENCE)

SCHEDULE OF JOINERY:

SCHEDULE OF JOINERY:

UnitBUA Table for Building :A1 (RESIDENCE)

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT
PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT