Project Title :SRI. DHANANJAY KUMAR





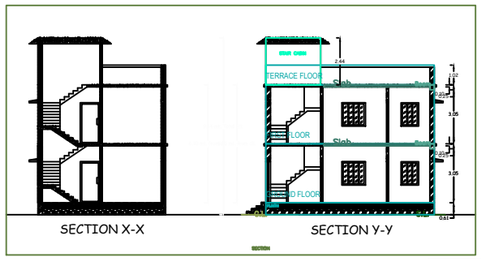

FOR MADA USE



TITLE OF DRAWING

PROPOSED PLAN FOR, SRI. DHANANJAY KUMAR S/O SURENDRA GOPE, AT PRESENT RESIDING AT, VILL. GAHARPUR, PO. & PS. KURTHA, DIST. ARWAL, BIHAR. FOR RESIDENTIAL BUILDING AT, OLD KHATA NO-35, NEW KHATA NO - 275, OLD C.S. PLOT NO- 2523, NEW C.S PLOT NO - 4028, AREA:- 2.75 DECIMAL SITUATED AT MAUZA NO:86, MAUZA -BARAPICHRI (GOVINDPUR) ,DISTRICT-DHANBAD

(JHARKHAND)

BRIEF SPECIFICATION

FOUNDATION---------- CEMENT CONCRETE (1:3:6)
FOOTING---------- R.C.C. (1:1½:3)
BRICK WORK IN FOUNDATION & SUPERSTRUCTURE
FIRST CLASS BRICK WORK IN CEMENT MORTAR (1:6)
D.P.C----------1" D.P.C. IN CEMENT CONCRETE (1:2:4)
COLUMNS---------- R.C.C. (1:1½:3)
BEAM---------- R.C.C. (1:1½:3)
FLOOR----------1" I.P.S. OVER 3" P.C.C.
ROOF----------4"THK. R.C.C. ROOF (1:1½:3)
LINTEL----------6"THK. R.C.C. LINTEL (1:1½:3)
STAIRS---------- RISE--6", TREAD-- 10"
DOORS---------- D-3'3"X7'0", D1-3'0"X7'0", D2-2'6"X7'0"
WINDOWS---------W-5'0"X4'0", W1-4'0"X4'0", W2-2'6"X4'0"
VENTS----------V-2'0"X2'0"

SCHEDULE

D -	3'-6" X 7'-0"	W -	4'-0" x 4'-0"
D1 -	3'-0" X 7'-0"	W1 -	3'-0" x 4'-0"
D2 -	2'-6" X 7'-0"	V -	2'-0" x 2'-0"

DETAILS OF AREA

LAND AREA	:	1200 Sft.
GROUND FLOOR AREA	:	665.00 Sft.
FIRST FLOOR AREA	:	665.00 Sft.
COVERED AREA	:	1330.00 Sft.
% OF PLINTH AREA	:	55.42 %
F.A.R	:	1.10

SIGN OF OWNER

SIGN OF ARCHITECT

ARCH. RAM PRATAP SINGH

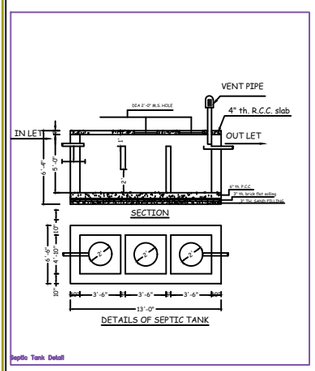

Septic Tank Detail

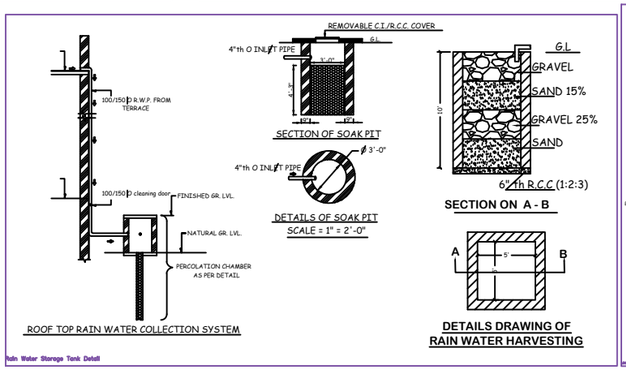

Rain Water Storage Tank Detail

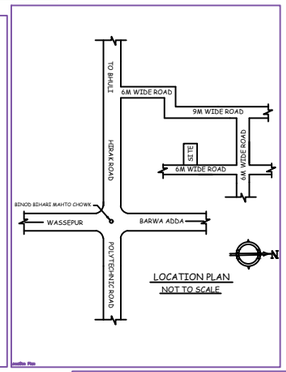











Structure Detail

GROUND FLOOR PLAN

FIRST FLOOR PLAN

TERRACE FLOOR PLAN

(DHANANJAY)

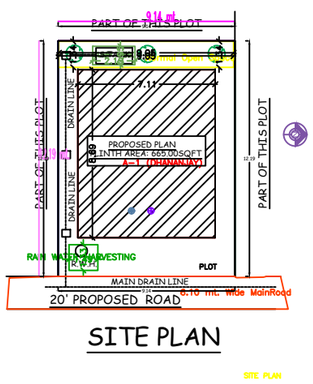

AREA STATEMENT: MINERAL AREA DEVELOMENT AUTHORITY		VERSION NO. : 1.0.36
		VERSION DATE: 16/10/2020
PROJECT DETAIL :		
Award_No : -		Plot Use : Residential
Region : JHARKHAND URBAN LOCAL BODIES		Plot SubUse : Bungalow/ Dwelling / Non Apartment
District : DHANBAD		Land Use Zone : NA
Application Type : General Proposal		Abutting Road Width : -
Project Type : Building Permission		Plot No. : -
Nature of Development : New		Revenue Survey No/Survey No : -
Location : Old Area		Thana No : -
Sub Location : NA		Holding No : -
Village/Mauza Name : -		Khata No : -
Ward No : -		North : -
Road/Street : -		South : -
		East : -
		West : -

AREA DETAILS :		SQ.MT.
AREA OF PLOT (Minimum)	(A)	111.39
Net Plot Area (Gross Plot Area - Deduction from Gross Plot area)	(A-Deductions)	111.39
Deductions for Balance Plot Area (from Gross Plot Area)		
COP Area		12.08
Total		12.08
Balance Plot Area (Net Plot Area - Recreational/Amenity space)	(A-Deductions)	99.30
Plot Area for Coverage (Net Plot Area)	(A-Deductions)	111.39
Plot Area for FSI (Net Plot Area + Road/Widening Area)	(A-Deductions)	111.39
COVERAGE CHECK		
Proposed Coverage Area (55.44 %)		61.76
Total Coverage Area (55.44 %)		61.76
FAR CHECK		
Proposed Area of FAR		123.52
Total Area of FAR		123.52
BUILT UP AREA CHECK		
Total Proposed Built-Up Area		123.52
ARCH / ENGG / SUPERVISOR (Regd)		OWNER
DEVELOPMENT AUTHORITY		LOCAL BODY

COLOR INDEX

PLOT BOUNDARY	
ABUTTING ROAD	
PROPOSED WORK (COVERAGE AREA)	
EXISTING (To be retained)	
EXISTING (To be demolished)	

Color Index

MARGIN DETAIL:

Building / Wing Name	Road Name	Front Margin	Rear Margin	Side1 Margin	Side2 Margin
A1 (DHANANJAY)	6.10 mt. Wide MainRoad	2.01	1.50	1.01	1.02

FAR & Tenement Details (Table 4c-1)

Building	No. of Same Bldg	Total Built Up Area (Sq.mt.)	Proposed FAR Area (Sq.mt.) Resi.	Total FAR Area (Sq.mt.)	Tnmt (No.)
A (DHANANJAY)	1	123.52	123.52	123.52	01
Grand Total :	1	123.52	123.52	123.52	01

Building :A (DHANANJAY)

Floor Name	Total Built Up Area (Sq.mt.)	Proposed FAR Area (Sq.mt.) Resi.	Total FAR Area (Sq.mt.)	Tnmt (No.)
Ground Floor	61.76	61.76	61.76	01
First Floor	61.76	61.76	61.76	00
Terrace Floor	0.00	0.00	0.00	00
Total :	123.52	123.52	123.52	01
Total Number of Same Buildings	1			
Total :	123.52	123.52	123.52	01

SCHEDULE OF JOINERY:

BUILDING NAME	NAME	LENGTH	HEIGHT	NOS
A (DHANANJAY)	D	0.76	2.10	02
A (DHANANJAY)	D	0.86	2.10	02
A (DHANANJAY)	D	0.91	2.10	04
A (DHANANJAY)	D	1.02	2.10	03
A (DHANANJAY)	D	1.07	2.10	01
Total :	-	-	-	12

SCHEDULE OF JOINERY:

BUILDING NAME	NAME	LENGTH	HEIGHT	NOS
A (DHANANJAY)	V	0.61	1.00	02
A (DHANANJAY)	W	0.91	1.20	04
A (DHANANJAY)	W	1.22	1.20	10
Total :	-	-	-	16

UnitBUA Table for Building :A (DHANANJAY)

FLOOR	Name	UnitBUA Type	UnitBUA Area	Carpet Area	No. of Rooms	No. of Tenement
GROUND FLOOR PLAN	SPLIT 1	FLAT	123.52	121.65	5	1
Total :	-	-	123.52	121.65	10	1