





DETAILS OF COLUMN FOUNDATION




SECTION X X

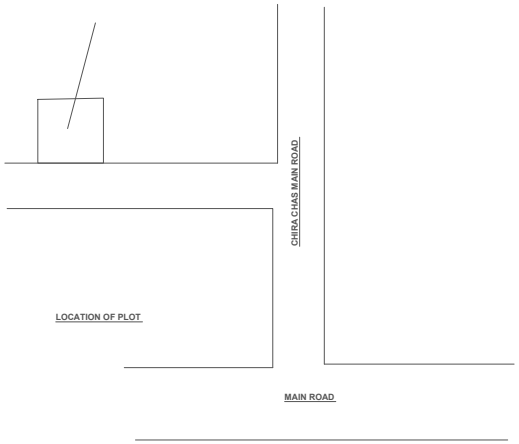





FRONT ELEVATION

SIDE ELEVATION

SECTION AT - AA

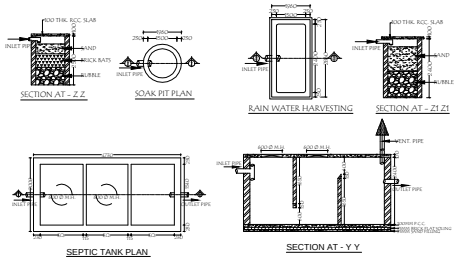SECTION AT - BB

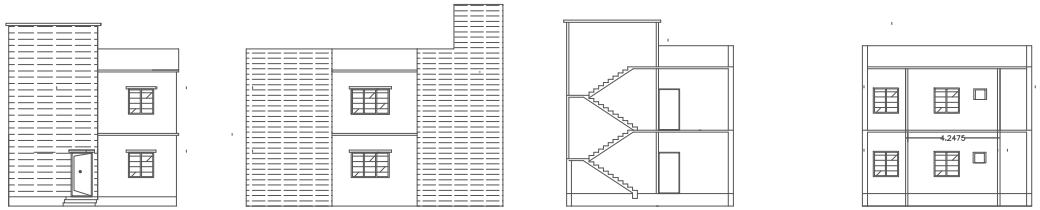


GROUND FLOOR PLAN

FIRST FLOOR PLAN

ROOF PLAN

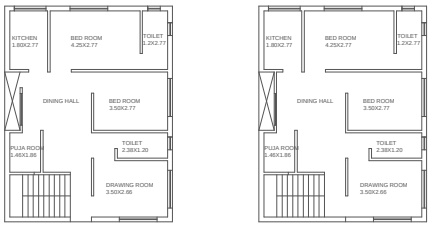


SITE PLAN

**SPECIFICATION**

1 .075 THICK P.C.C. BED FOUNDATION
2 FIRST CLASS BRICK WORK IN SUPER STRUCTURE (1:6)
3 ALL R.C.C. WORK IN CEMENT CON. (1:11/2 :3)
4 1/4 PLASTER BOTH SIDE OF WALL IN PROPORTION (1:6) IN CEILING PLASTER (1:4)
5 TWO COATS OF WHITE WASH AND ONE COLOUR WASH BOTH SIDE OF WALL

**SCHEDULE OF DOORS & WINDOWS**
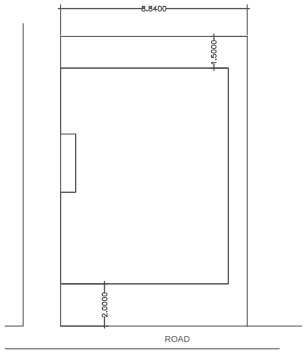
| TYPE | SIZE | DESCRIPTION |
|---|---|---|
| D | 1.000X2.100 | FULLY PANNLED |
| D1 | 0.900X2.100 | DO |
| D2 | 0.750X2.100 | DO |
| W | 1.500X1.200 | FULLY GLLAZED |
| W1 | 1.200X1.200 | DO |
| W2 | 1.000X1.200 | DO |
| V | 6.000X0.600 | DO |

**SCHEDULE OF DRAWING**

PROPOSED RESIDENTIAL BUILDING PLAN OF PRAMOD KUMAR SINGH S/O BAIKUNTH SINGH IN MOUZA-CHAS, THANA- CHAS , THANA NO.- 30 , PARGANA- KHASPEL, DIST- BOKARO(JH.) , KHATA NO.-01 ,PLOT NO.-1494 , WARD NO.-4 , PLOT AREA - 3 DECIMAL, HOLDING NO.-

**STATEMENT OF AREA**

| | | | |
|---|---|---|---|
| TOTAL PLOT AREA | : | 121.44 | SQM. |
| GROUND FLOOR AREA | : | 79.08 | SQM. |
| FIRST FLOOR AREA | : | 79.08 | SQM. |
| TOTAL COVERED AREA | : | 158.16 | SQM. |
| OPEN AREA | : | | SQM. |
| % OF PLINTH | : | | % |

**BOUNDARY**

NORTH : 6 M WIDE ROAD
SOUTH : PART OF PLOT
EAST : PART OF PLOT "G/3"
WEST : NAVNEET KUMAR SINGH

**OWNER SIGN.** **ENGINEER SIGN.**

E:\destop\New folder\PRAMOD KUMAR SINGH\PRAMOD KUMAR SINGH.dwg, 3/7/2022