Project Title :Hargovind Ram

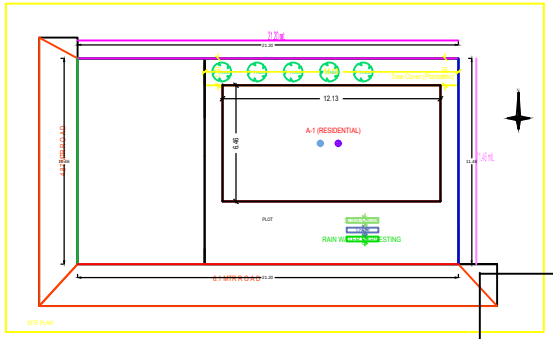

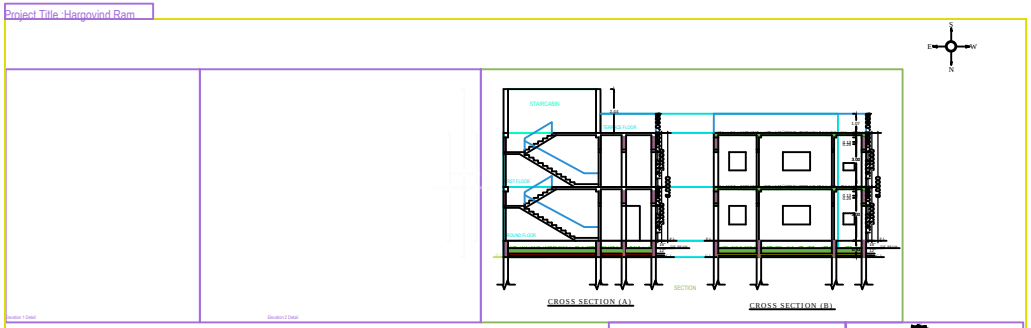

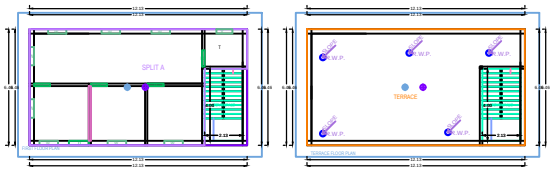

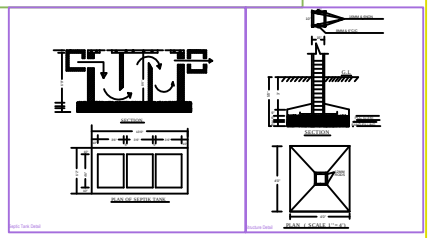





AREA STATEMENT: MEDINNAGAR MUNICIPAL CORPORATION	VERSION NO. : 1.0.36
	VERSION DATE: 19/12/2020
PROJECT DETAIL:	
Award_No. : -	Plot Use : Residential
Region : JHARKHAND URBAN LOCAL BODIES	Plot Sub Use : Bungalow/ Dwelling / Non Apartment
District : PALAMU	Land Use Zone : NA
Application Type : General Proposal	Abutting Road Width : -
Project Type : Building Permission	Plot No. :
Nature of Development : New	Revenue Survey No/Survey No :
Location : Old Area	Thana No : -
Sub Location : NA	Holding No : -
Village/Mauza Name :	Khata No. : -
Ward No : -	North : -
Road/Street : -	South : -
	East : -
	West : -

AREA DETAILS :		SQMT
AREA OF PLOT (Minimum)	(A)	242.81
Net Plot Area (Gross Plot Area - Deduction From Gross Plot Area)	(A-Deductions)	242.89
Deductions for Balance Plot Area (from Gross Plot Area)		
COP Area		21.00
Total		21.00
Balance Plot Area (Net Plot Area - Recreational/Amenity space)	(A-Deductions)	221.89
Plot Area for Coverage (Net Plot Area)	(A-Deductions)	242.89
Plot Area for FAR (Net Plot Area - Road/Blocking Area)	(A-Deductions)	242.89
Accessory/Ltd Area		0.00
COVERAGE CHECK		
Proposed Coverage Area (32.26 %)		78.36
Total Coverage Area (32.26 %)		78.36
FAR CHECK		
Proposed Area of FAR		156.72
Total Area of FAR		156.72
BUILT UP AREA CHECK		
Total Proposed Building Area		156.72
PROJECT PROPONENT/APPLICANT		OWNER
DEVELOPMENT AUTHORITY		LOCAL BODY

COLOR INDEX

PLOT BOUNDARY
ABUTTING ROAD
PROPOSED WORK (COVERAGE AREA)
EXISTING (To be retained)
EXISTING (To be demolished)

Color Index:

MARGIN DETAIL:

Building / Wing Name	Road Name	Front Margin	Rear Margin	Side1 Margin	Side2 Margin
A (RESIDENTIAL)	9.1 MTR R O A D	3.00	1.30	1.00	8.06

FAR & Tenement Details (Table 4c-1)

Building	No. of Same Bldg	Total Built Up Area (Sq.mt.)	Proposed FAR Area (Sq.mt.) Resi.	Total FAR Area (Sq.mt.)	Tnmt (No.)
A (RESIDENTIAL)	1	156.72	156.72	156.72	01
Grand Total :	1	156.72	156.72	156.72	01

Building :A (RESIDENTIAL)

Floor Name	Total Built Up Area (Sq.mt.)	Proposed FAR Area (Sq.mt.) Resi.	Total FAR Area (Sq.mt.)	Tnmt (No.)
Ground Floor	78.36	78.36	78.36	01
First Floor	78.36	78.36	78.36	00
Terrace Floor	0.00	0.00	0.00	00
Total :	156.72	156.72	156.72	01
Total Number of Same Buildings :	1			
Total :	156.72	156.72	156.72	01

SCHEDULE OF JOINERY:

BUILDING NAME	NAME	LENGTH	HEIGHT	NOS
A (RESIDENTIAL)	D	0.90	2.10	04
A (RESIDENTIAL)	D1	0.80	2.10	02
A (RESIDENTIAL)	D2	0.91	2.10	02
A (RESIDENTIAL)	D	1.10	2.10	02
Total :				10

SCHEDULE OF JOINERY:

BUILDING NAME	NAME	LENGTH	HEIGHT	NOS
A (RESIDENTIAL)	V	0.60	1.20	02
A (RESIDENTIAL)	W	1.83	1.20	16
Total :				18

UnitBUA Table for Building :A (RESIDENTIAL)

FLOOR	Name	UnitBUA Type	UnitBUA Area	Carpet Area	No. of Rooms	No. of Tenament
GROUND FLOOR PLAN	SPLIT A	FLAT	156.50	139.70	3	1
Total :	-	-	156.50	139.70	03	1