Project Title :MANISH KUMAR ,SMT SUDHA MISHRA

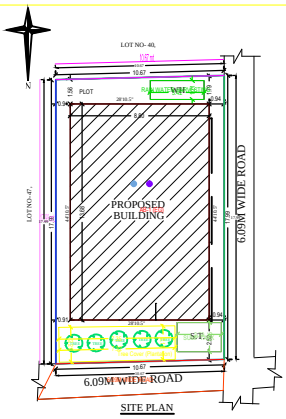











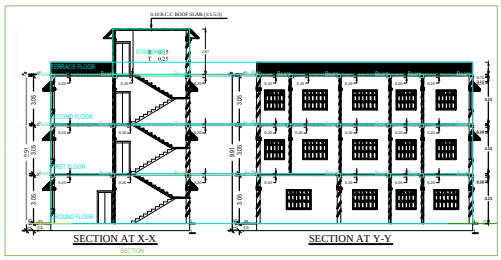











BRIEF SPECIFICATION

FOUNDATION :-R.C.C. (1:1.5:3) Column footing foundation.
PLINTH :- 12"th R.C.C. (1:1.5:3) all round on plinth level.
FLOORING :- 1.5"th I.P.S. flooring over 3"th P.C.C. (1:3:6).
SUPER STRUCTURE :- First class brick work in cement mortar (1:6)
SLAB,BEAM & LINTEL :- All R.C.C. work (1:1.5:3).
WOOD WORK :- All door & window frames of sal wood.
PLASTERING :- 0.5"th cement plaster (1:6) both side.

SCHEDULE

D-	1.000 x 2.100	W -	1.520 x 1.200
D1-	0.900 x 2.100	W1-	1.200 x 1.200
D2 -	0.750 x 2.100	W2-	0.900 x 1.200
		V -	0.600 x 0.450

DETAILS OF AREA

TOTAL LAND AREA	191.78 SqM.
GROUND FLOOR AREA	120.44 SqM.
FIRST FLOOR AREA	117.96 SqM.
SECOND FLOOR AREA	117.96 SqM.
TOTAL COVERED AREA	356.34 SqM.
% OF PLINTH AREA	62.80%
F.A.R	1.85

TITLE OF DRAWING

PLAN OF RESIDENTIAL BUILDING OF
1. MANISH KUMAR ,S/O SRI BRAJMOHAN DEV, 2. SMT SUDHA MISHRA,W/O SRI MANISH KUMAR, OF C.M.P.F.CO-OPERATIV COLONY,NEAR BHUIPHORE MANDIR, SARAIDHELA, DHANBAD, UNDER MOUZA- SABALPUR NO- 126,OLD KHATA NO- 35, NEW KHATA NO-91, OLD PLOT NO- 511,515, & 521, NEW PLOT NO- 601,621, DIST- DHANBAD,(JHARKHAND).

SIG. OF OWNER

SIG. OF ENGINEER

DRW. AT :-

Building AB (EG)